

**6" Round Ultimate Super Thin Recessed LED 17W**

**Type IC, Wet & Air-Tight**
**DESCRIPTION**

6" Round Recessed LED With Integral Driver In Connection Box  
Fits Where No Other Recessed Fixture Can


**FEATURES & BENEFITS**

1/2" Deep - Install Directly Under Joists, Maximum Layout Flexibility  
Wider Trim - No Goof Rings Needed For Covering Old 6" Holes  
Driver Inside Connection Box - No Junction Box Needed  
Fast & Easy To Install - Save On Labor  
Type IC Rated - No Housing Required  
CRI 90 + for True Color Rendering

**MOUNTING**

Cut Hole In Ceiling And Snap Fixture In Opening With Attached  
Spring Clips. Ceiling Clearance Required For Driver: 1 1/2"

**DIMENSION** ID 6 1/8" OD 7 1/2" Cut Out 6 1/4" to 6 1/2"

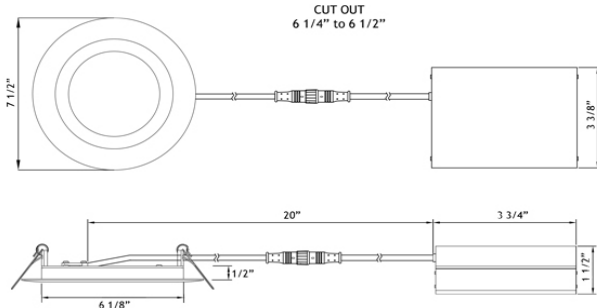

120V TRIAC Dimmable

Driver Included

Optional 120V - 347V

Driver 0-10V Dimmable



Order Separately as  
Cat # LLL-LD2050T

**ORDERING GUIDE**

Example: **LL6R - 30K - WH**

	CCT	Trim Finish	
<b>LL6R</b>	-	-	
2700K	<b>27K</b>	<b>WH</b>	White
3000K	<b>30K</b>	<b>BK</b>	Black
4000K	<b>40K</b>	<b>BN</b>	Brushed Nickel
5000K	<b>50K</b>	<b>BC</b>	Brushed Copper
DTW 28-20	<b>28K</b>	Dim to Warm 2800K to 2000K <b>WH</b> Trim Only	
DTW 35-20	<b>32K</b>	Dim to Warm 3500K to 2000K <b>WH</b> Trim Only	

Project:

Location:

Cat #:

Qty:

Notes:

**SPECIFICATION**

Applications	Recessed Ceiling, Showers & Soffits					
Energy Used	17 W					
Colour Temperature	2700	3000	4000	5000	DTW 28-20	DTW 35-20
Light Output	950	980	1000	1050	950	980
Halogen Equivalent	100 W					
Beam Angle	110°					
CRI	90 +					
Default Driver Input	120V AC			Triac Dimmable		
Optional Driver Input	120V-347V AC			0-10V Dimmable		
Power Factor	0.95					
Approved Location	Insulated Ceiling, Wet & Damp Locations					
IP Rating	IP 54					
Air Tight	Yes					
Ambient Temperature	-40°F (-40°C) to +104°F (+40°C)					
Projected Life	70% Light Output at 50,000 Hours					
Certification	cULus, Energy Star (except DTW), T24					
Warranty	10 Year on Residential					
	5 Year on Commercial Applications					

**AVAILABLE TRIMS**


White

Black

Brushed Nickel

Brushed Copper

**ACCESSORIES**

Sold Separately



Low Voltage Extension Cables

6ft - cat # **EXC6**, 20ft - cat # **EXC20**

Max 40 ft Allowed. FT4 / CMR rated



Flat Rough-In Plates - cat # **RIP612**



Flanged Rough-In Plate - cat # **FRP6**

**COMPLIANCE**


**Type IC  
Air-Tight**