


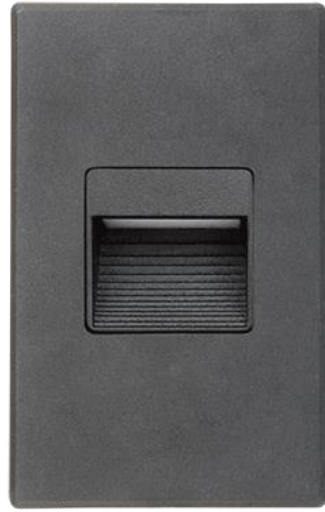

INSTALLATION INSTRUCTIONS

Technical drawings and a photograph of the PC+ sensor unit. The top left drawing shows a top view with dimensions 4 1/2" (115mm) and 2 3/4" (70mm). The top right drawing shows a side view with a dimension of 2" (52mm). The bottom photograph shows the physical unit, a black rectangular device with a cable and a label that reads "PC+".

LSD09-5CCT-24V-WH	White
LSD09-5CCT-24V-BK	Black

Notes:

SPECIFICATION						
Applications	Stairways, Walkways, Patios, Decks					
Input (V)	24 V AC or DC					
Energy Used (W)	2.5 W					
Color Temperature (K)	2700		3000		3500	4000 5000
Light Output (lm)	80		90		100	100 90
Halogen Equivalent	10 W					
CRI	90 +					
Dimmable	Yes					
Ambient Temperature	-4°F (-20°C) to +104°F (+40°C)					
Approved Location	Wet & Dry					
Projected Life	70% Light Output at 50,000 Hours					
Certification	cETLus					
Warranty	5 Year					

White Horizontal

White Vertical

Black Horizontal

Black Vertical