

LY41RCD

4" Round Slim Recessed LED 12W



Type IC, Damp & Air-Tight

Project: Location: Cat #: Qty: Notes:

SPECIFICATION

DESCRIPTION

4" Round Recessed LED With Integral Driver In Connection Box


FEATURES & BENEFITS

1" Deep - Install Where Ceiling Space Is Limited Driver Inside Connection Box - No Junction Box Needed Fast & Easy To Install - Save On Labor Type IC Rated - No Housing Required

MOUNTING

Cut Hole In Ceiling And Snap Fixture In Opening With Attached Spring Clips. Ceiling Clearance Required For Driver: 2"

DIMENSIONS: ID 4" OD 5" Cut Out 4" to 4 1/2"

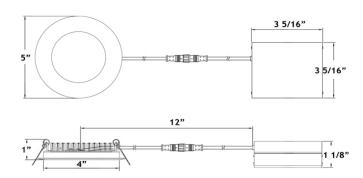

|--|

Driver Included

Optional 120V - 347V Driver 0-10V Dimmable





Order Separately as Cat # LLL-LD1535T

AVAILABLE TRIMS







ORDERING GUIDE Example: LY41RCD / 30K / WH

	CCT	Trim Finish	
LY41RCD	1	1	
3000K	30K	WH	White
4100K	41K	BK	Black
		BN	Brushed Nickel

0. 20070					
Applications	Recessed Ceiling				
Energy Used	12 W				
Colour Temperature	3000	4100			
Light Output	700	800			
Halogen Equivalent	65 W				
Beam Angle	110	110°			
CRI	80	80			
Default Driver Input	120V AC	Triac Dimmable			
Optional Driver Input	120V-347V AC	0-10V Dimmable			
Power Factor	0.95				
Approved Location	Insulated Ceiling & Damp Locations				
IP Rating	IP 54				
Air Tight	Yes				
Ambient Temperature	-40°F (-40°C) to +104°F (+40°C)				
Projected Life	70% Light Output at 50,000 Hours				
Certification	cULus, Energy Star				
Warranty	10 Year on Residential				
vvarratity	5 Year on Commercial Applications				

ACCESSORIES

Sold Separately



Low Volage Extension Cables 6ft - cat #EXC6, 20ft - cat #EXC20 Max 40 ft Allowed. FT4 / CMR rated



Flat Rough-In Plates - cat #RIP4



Flanged Rough-In Plate - cat #FRP4



Goof Ring OD 5 3/4" White cat #GR4 Black cat #GR4-BK

COMPLIANCE





Type IC Air-Tight

Lotus LED Lights USA

www.LotusLEDLights.com

Lotus LED Lights CANADA