

**LY61RCD****6" Round Slim Recessed LED 15W****Type IC, Damp & Air-Tight****DESCRIPTION**

6" Round Recessed LED With Integral Driver In Connection Box

FEATURES & BENEFITS

1" Deep - Install Where Ceiling Space Is Limited

Driver Inside Connection Box - No Junction Box Needed

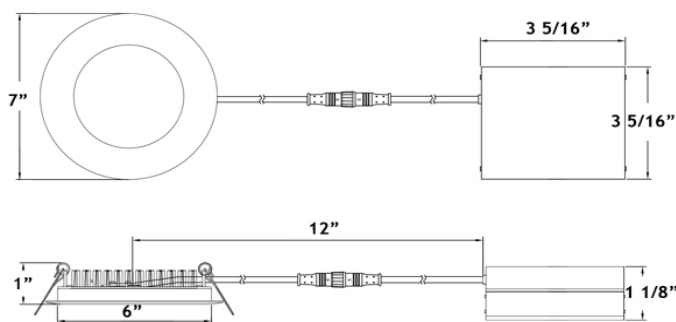
Fast & Easy To Install - Save On Labor

Type IC Rated - No Housing Required

MOUNTING

Cut Hole In Ceiling And Snap Fixture In Opening With Attached Spring Clips. Ceiling Clearance Required: 1 1/2"

DIMENSIONS: ID 6" OD 7" Cut Out 6" to 6 1/2"

120V TRIAC Dimmable
Driver IncludedOptional 120V - 347V
Driver 0-10V DimmableOrder Separately as
Cat # LLL-LD1535T**AVAILABLE TRIMS**

White



Brushed Nickel

ORDERING GUIDE Example: **LY61RCD / 30K / WH**

	CCT	Trim Finish	
LY61RCD	/	/	
3000K	30K	WH	White
4100K	41K	BN	Brushed Nickel

Project:

Location:

Cat #:

Qty:

Notes:

SPECIFICATION

Applications	Recessed Ceiling	
Energy Used	15 W	
Colour Temperature	3000	4100
Light Output	850	900
Halogen Equivalent	75 W	
Beam Angle	110°	
CRI	80	
Default Driver Input	120V AC	Triac Dimmable
Optional Driver Input	120V-347V AC	0-10V Dimmable
Power Factor	0.95	
Approved Location	Insulated Ceiling & Damp Locations	
IP Rating	IP 54	
Air Tight	Yes	
Ambient Temperature	-40°F (-40°C) to +104°F (+40°C)	
Projected Life	70% Light Output at 50,000 Hours	
Certification	cULus, Energy Star	
Warranty	10 Year on Residential	
	5 Year on Commercial Applications	

ACCESSORIES

Sold Separately

Low Voltage Extension Cables
6ft - cat # **EXC6**, 20ft - cat # **EXC20**
Max 40 ft Allowed. FT4 / CMR ratedFlat Rough-In Plates - cat # **RIP6**Flanged Rough-In Plate - cat # **FRP6**Goof Ring White OD 7 5/8" cat # **GR6****COMPLIANCE****Type IC**
Air-Tight**Lotus LED Lights USA**

250 H Street # 301, Blaine WA 98230 tel 360-200-5500

Warehouses: Hainesport NJ, Naples FL, Dallas TX, Las Vegas NV, Lynnwood WA

www.LotusLEDLights.com**Lotus LED Lights CANADA**

800-15355 24 Ave Box 200, Surrey BC V4A 2H9 tel 604-538-3090

Delta BC & Mississauga ON