

# # 3930

SQUARE DIRECTIONAL BEAM TRIM

## LED-10W

For insulated or non insulated ceilings

## 50W-GU-10 HALOGEN

For non insulated ceilings only

FOR 3 5/8" HOUSINGS


### TECHNICAL SPECIFICATIONS

- Colours: WH-White, BS-Brushed steel, BK-Black, CH-Chrome
- Beam angle adjustment: 30°


### HOUSINGS REQUIRED

#### 1. For insulated or non insulated ceilings

- Housing LP-358-IC + plaster frame PF-378

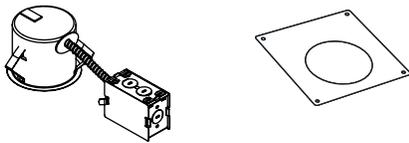


- Housing GU-358-IC + plaster frame PF-378

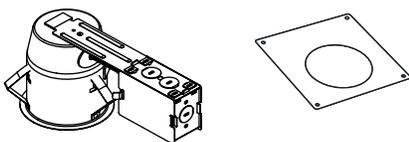


#### 2. For insulated ceilings (plaster frame not required)

- Housing IB-358





#### 3. Commercial housing (plaster frame not required) (Not recommend for insulated ceilings)

- Housing NC-358



### SIZES / TRIM

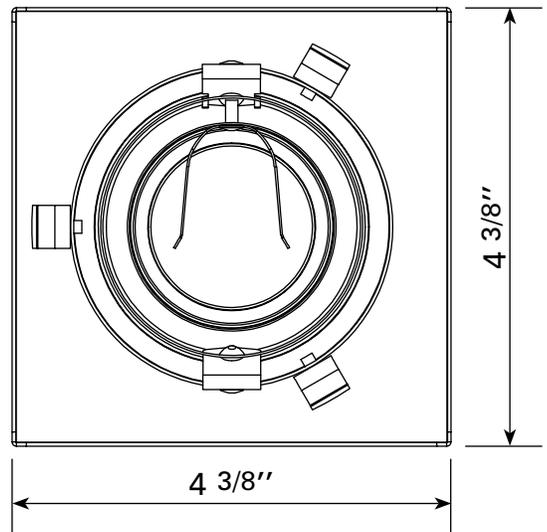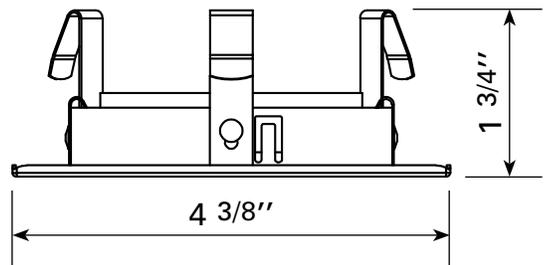

CLIENT:
PROJECT:
DATE: