


CLPBL 1X4-40W / 30K

TECHNICAL SPECIFICATIONS

- Sizes: 12" x 48"
- Color: WH-White
- 120 V - 277 V / 40 WATTS
- CRI: > 80
- 4893 LUMENS
- Degrees Kelvin: 3000K
- SDCM: < 7
- IC
- Approved for wet locations


SIZES / LED PANEL 1X4

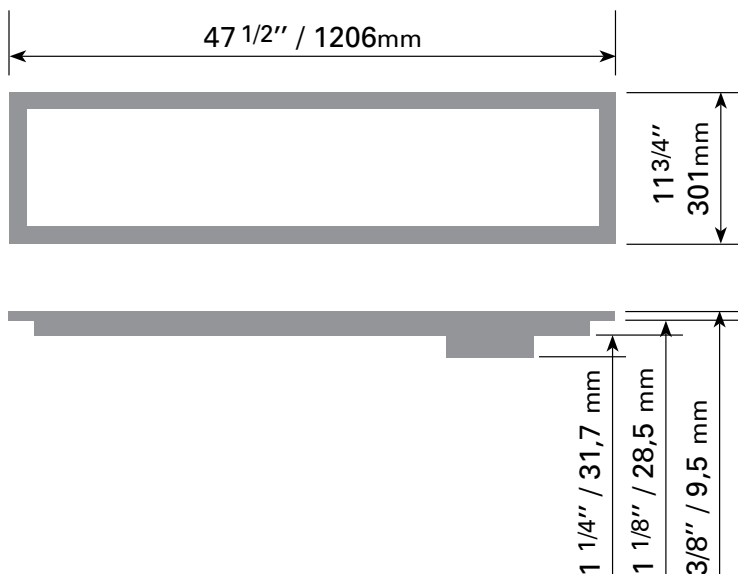

INSTALLATION

1. RECESSED


- Remove the suspended ceiling panel you wish to change
- Install the LED panel in the available space



2. HANGING (optional)

CLPBL-SUSP


- 39" cable system for hanging the device




3. CEILING MOUNTED (optional)

CLPBL-FRAME 1x4

- Metal frame for turning the device into a ceiling light




LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

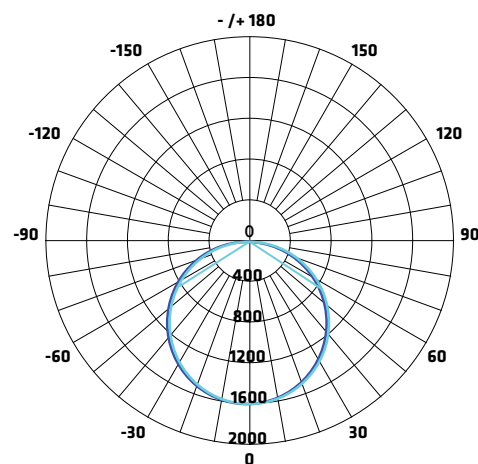

ANGLE MOYEN DU FAISCEAU (50%) : 114.3°

Unité : CD C0/180,114.6° C22.5/202.5,114.5°
C45/225,114.3° C90/270,113.9°

FIGURE AAI

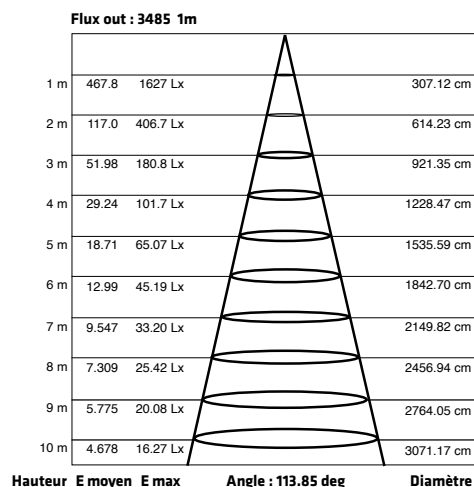


Note : Les courbes indiquent la zone éclairée et la moyenne d'éclairage lorsque le luminaire est à différentes distances.

CLPBL 1X4-40W / 40K

TECHNICAL SPECIFICATIONS

- Sizes: 12" x 48"
- Color: WH-White
- 120 V - 277 V / 40 WATTS
- CRI: > 80
- 4990 LUMENS
- Degrees Kelvin: 4000K
- SDCM: < 7
- IC
- Approved for wet locations


SIZES / LED PANEL 1X4

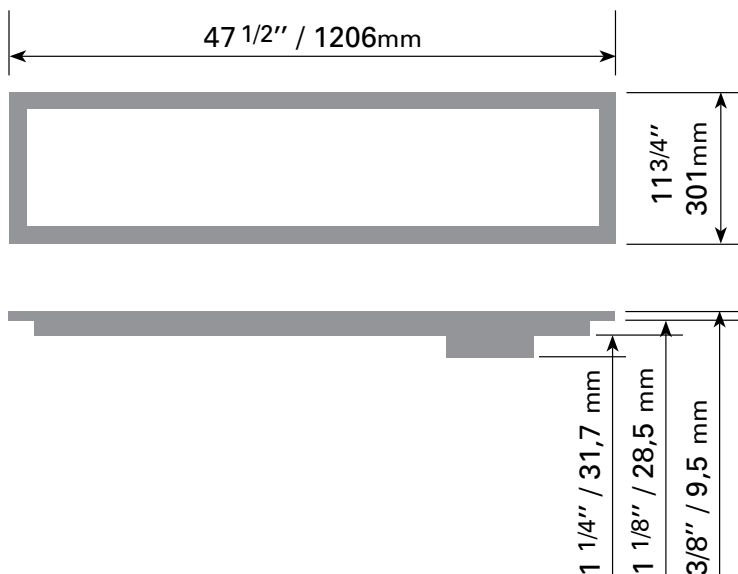

INSTALLATION


1. RECESSED

- Remove the suspended ceiling panel you wish to change
- Install the LED panel in the available space




2. HANGING (optional) # CLPBL-SUSP

- 39" cable system for hanging the device




3. CEILING MOUNTED (optional) # CLPBL-FRAME 1x4

- Metal frame for turning the device into a ceiling light




LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

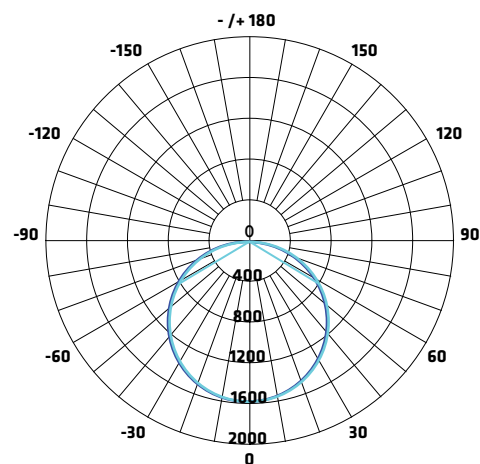

ANGLE MOYEN DU FAISCEAU (50%) : 114.4°

Unité : CD C0/180,114.6° C22.5/202.5,114.5°
C45/225,114.4° C90/270,113.9°

FIGURE AAI

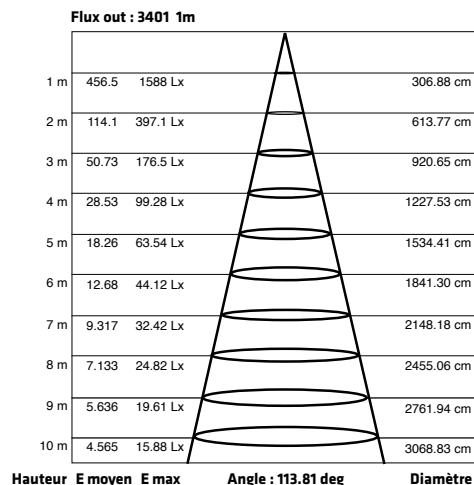


Note : Les courbes indiquent la zone éclairée et la moyenne d'éclairage lorsque le luminaire est à différentes distances.

CLPBL 1X4-40W / 50K

TECHNICAL SPECIFICATIONS

- Sizes: 12" x 48"
- Color: WH-White
- 120 V - 277 V / 40 WATTS
- CRI: > 80
- 4881 LUMENS
- Degrees Kelvin: 5000K
- SDCM: < 7
- IC
- Approved for wet locations


SIZES / LED PANEL 1X4

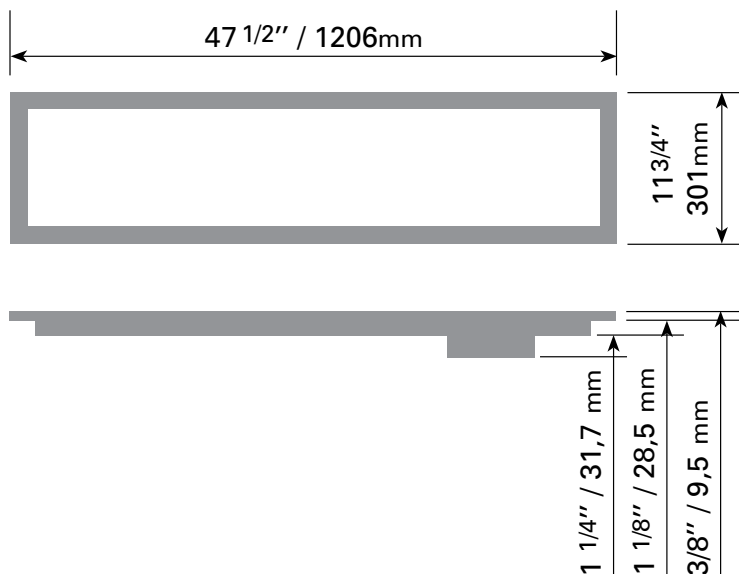

INSTALLATION


1. RECESSED

- Remove the suspended ceiling panel you wish to change
- Install the LED panel in the available space




2. HANGING (optional) # CLPBL-SUSP

- 39" cable system for hanging the device




3. CEILING MOUNTED (optional) # CLPBL-FRAME 1x4

- Metal frame for turning the device into a ceiling light




LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

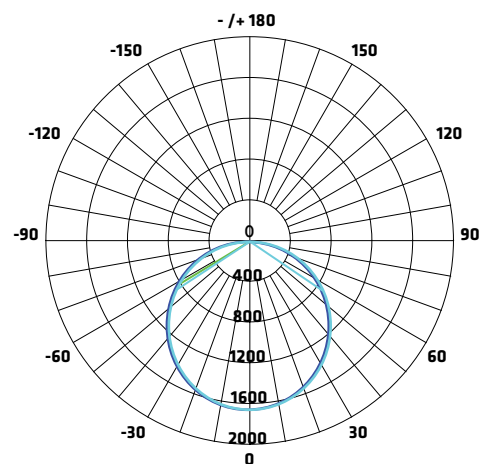

ANGLE MOYEN DU FAISCEAU (50%) : 114.3°

Unité : CD — C0/180, 114.6° — C22.5/202.5, 114.5°
— C45/225, 114.3° — C90/270, 113.9°

FIGURE AAI

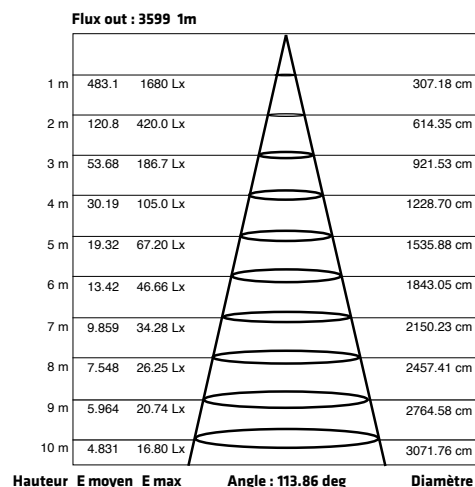

Note : Les courbes indiquent la zone éclairée et la moyenne d'éclairage lorsque le luminaire est à différentes distances.


■ INSTALLATION OPTIONS

SURFACE INSTALLATION

CLPBL-FRAME


- CLPBL-1X4: 12" X 48" X 2 3/4"
- CLPBL-2X2: 24" X 24" X 2 3/4"
- CLPBL-2X4: 24" X 48" X 2 3/4"

■ 1. ASSEMBLE THE FRAME

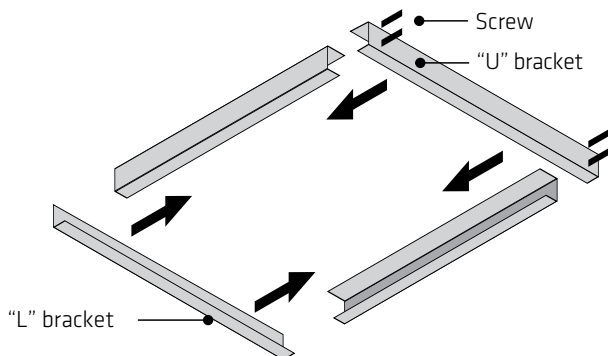

■ 2. ATTACH THE FRAME TO THE CEILING


Drill 6 mm holes in the ceiling and screw in

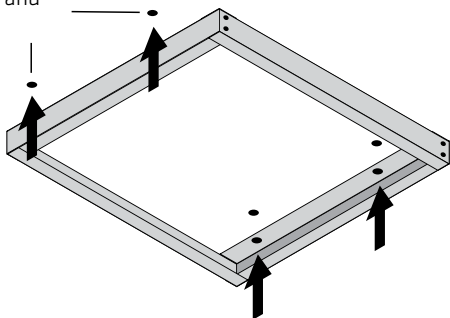

■ 3. INSTALL THE LED PANEL

Remove the "L" bracket, slide in the LED panel and replace the bracket


Slide the LED panel into the frame

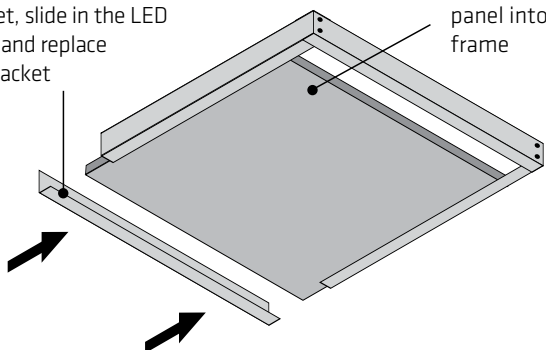


PENDANT INSTALLATION

CLPBL-SUSP

■ 1. ATTACH THE PENDANT SYSTEM TO THE CEILING

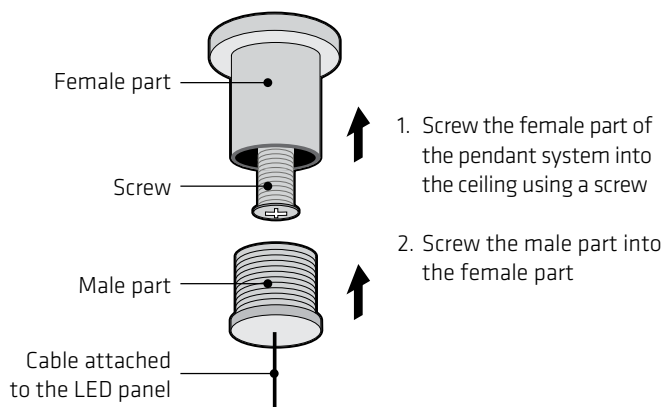

■ 2. ATTACH THE LED PANEL TO THE PENDANT SYSTEM

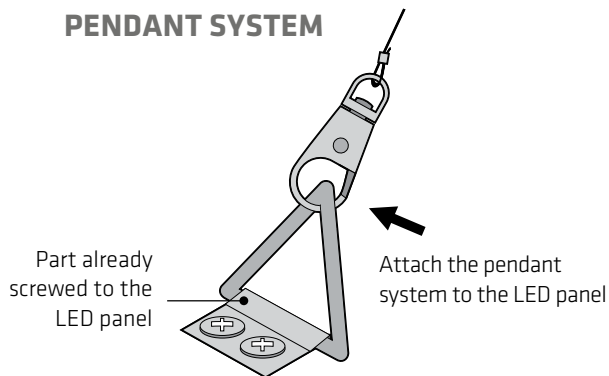

■ 3. INSTALLATION IS COMPLETE

