


LEDST19-5W / 30K AND 40K




TECHNICAL SPECIFICATIONS

- 5 WATTS
- 120 VOLTS
- 500 LUMENS
- Degrees Kelvin: 3000K / 4000K
- CRI: 80
- Bulb color: Clear

DIMENSIONS

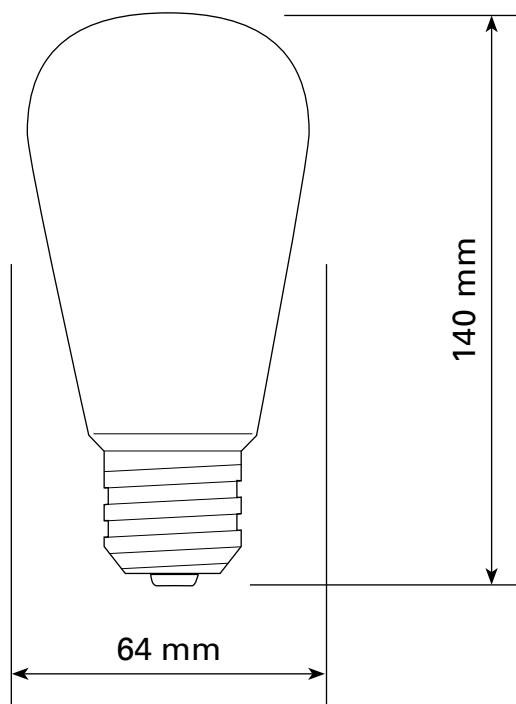

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

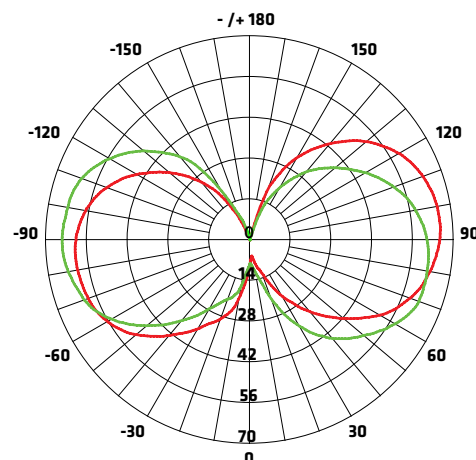

AVERAGE BEAM ANGLE (50%): 323.8°

Unit: CD — C0/180,323.2° — C90/270,324.3°

FIGURE AAI

Flux out: 54.22 lm

Height	E avg	E max	Angle: 90.00 deg	Diameter
1 m	17.26	24.07 Lx		200.00 cm
2 m	4.314	6.018 Lx		400.00 cm
3 m	1.917	2.674 Lx		600.00 cm
4 m	1.079	1.504 Lx		800.00 cm
5 m	0.6903	0.9628 Lx		1000.00 cm
6 m	0.4794	0.6886 Lx		1200.00 cm
7 m	0.3522	0.4912 Lx		1400.00 cm
8 m	0.2696	0.3761 Lx		1600.00 cm
9 m	0.2131	0.2972 Lx		1800.00 cm
10 m	0.1726	0.2407 Lx		2000.00 cm

Note: The curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

While our LED bulbs function with most dimmers and dimmers generally have a maximum 150-Watt rating for LED bulbs, we strongly recommend that you not exceed 80% of this capacity in order to avoid lighting flicker when the dimmer is at its lowest setting. For example, we recommend a maximum of 15 8-Watt PAR20 bulbs (total 120 Watts).