

DISC LIGHT CCT SELECTABLE SERIES



DL6



DL7

PRODUCT DESCRIPTION:

The LED Disc Light's versatility as a flush mount fixture and surface downlight saves electrical contractors time, labor and space by making it possible to install custom downlighting without a recessed can. This luminaire is wet location rated, CCT selectable (2700K/3000K/4000K/5000K), Title 20 and ETL listed as both a retrofit kit and a luminaire. The slim-profile Disc Light is available in two sizes, and mounts directly to a 3"/4"/5"/6" housing and standard 4" J-Box. In other words, more options and fewer SKUs to stock on distributor shelves and job sites!

Providing exceptional performance in general lighting applications for homes, hotels, motels and commercial properties, this series can also serve as a cost-effective temporary lighting solution. The luminaire is the ideal choice for adding energy-efficient and long-lasting downlighting to bathrooms, showers, spas and other indoor wet, damp, dry locations environment.



FEATURES:

- E26 screw-base connector included
- Listed as a fixture and a retrofit
- Passes the Lutron Shimmer test. Listing on Lutron Compatibility list is in progress.

DIMMING:

- 120V option available with 120V triac dimming (10%)

MOUNTING:

- DL6 model fits 3"/4" housing and standard 4" J-Box
- DL7 model fits 3"/4"/5"/6" housing and standard 4" J-Box
- E26 screw-base connector included

CONSTRUCTION:

- Durable thermoplastic housing
- Plastic lens

LISTINGS:

- ETL listed for Wet Locations, Indoor
- ENERGY STAR Certified
- T20 Listed
- Supports T24 Part 6 high efficacy lighting requirements
- JA8 Listed for CCTs \geq 4000K

WARRANTY:

5-year standard warranty (further details available at www.maxlite.com/warranties) Product may be eligible for a warranty extension to 10 years, for an additional fee. Contact MaxLite for details.

ORDERING STRUCTURE

| FAMILY | SIZE | WATTAGE (NOMINAL) | CRI | CCT | FINISH |
|----------------|---------------|-------------------|-------|--|-----------|
| DL= Disc Light | 6= O.D. 5.20" | 07= 07W | 9= 90 | CS= 2700K/3000K/4000K/5000K CCT Selectable | WH= White |
| | 7= O.D. 7.33" | 11= 11W | | | |

ORDER CODE

| ORDER CODE | MODEL NUMBER |
|------------|--------------|
| 103864 | DL6079CSWH |
| 103873 | DL7119CSWH |


COMPATIBLE DIMMERS

| DIMMER BRAND | MODELS |
|--------------|--|
| LUTRON | DVLV-600P, DVELV-303P, DV-600P, MACL-153M, SCL-153P, DVCL-153P, MAELV-600, CTCL-153PDH-WH, TGCL-153PH-WH, DVWCL-153PH-WH |


SPECIFICATIONS

| | DL6079CSWH | DL7119CSWH |
|-----------------------|---|-------------------------------|
| | DETAILS | |
| Nominal Wattage (W) | 7W | 11W |
| Lumens Delivered (lm) | 650 | 1000 |
| Equivalency | 40W INC | 75W INC |
| Efficacy (lm/W) | 97 | 95 |
| Beam Angle | 110° | |
| CRI | ≥90 | |
| Color Temperature (K) | CCT Selectable: 2700K, 3000K, 4000K, 5000K | |
| L70 Lifetime (Hrs) | ≥50,000 Hrs | |
| Voltage | 120V, Triac Dimming, 10% | |
| Power Factor | ≥0.90 | |
| Housing | Thermoplastic | |
| Lens | Plastic | |
| Mounting | 3"/4" housings, 4"J-box | 3"/4" 5"/6" housings, 4"J-box |
| Operating Temperature | -4°F to 104°F | |
| Listings | ENERGY STAR, JA8, Title 24, Title 20, cETLus, FCC | |
| Environment | Wet locations, Indoor | |
| Warranty | 5 Years | |

PRODUCT DIMENSIONS:

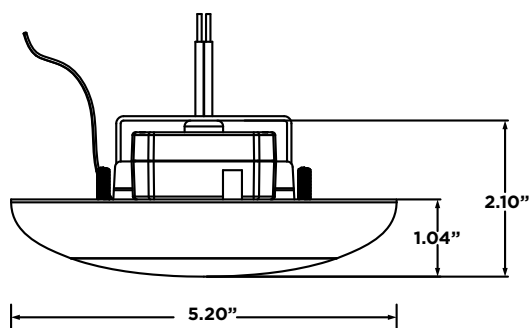

DL6

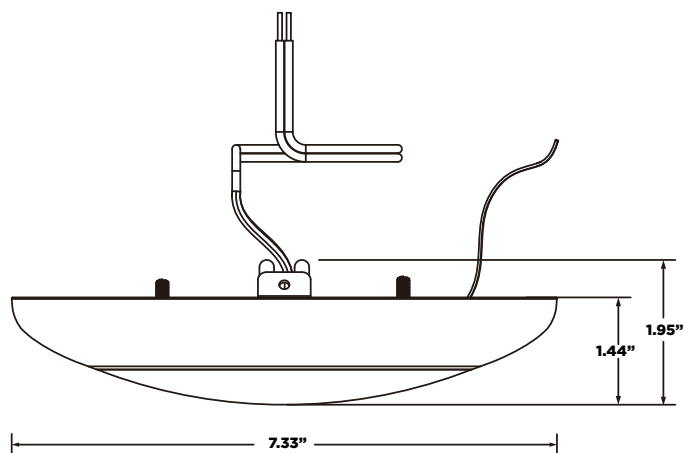

DL7