

PROJECT: _____ CATALOG # _____ NOTES: _____ FIXTURE SCHEDULE: _____

HIGH OUTPUT FLOOD CLASS I DIVISION 2 | HL-ELLF SERIES



The **HL-ELLF SERIES** is a uniquely flexible LED **Class I Division 2** high-output modular flood fixture. Three optical distributions and independently pivoting modules allow them to outperform high-wattage HID lamps in a variety of applications. External drivers powers each module individually to give the fixture flexible profile and low EPA. They mount using an arch yoke, high bay bracket, or a pole tenon accessory for multiple applications where flammable gases or vapors may produce explosive or ignitable mixtures. Ideal for general area illumination in **harsh and hazardous locations** like oil refineries, gasoline storage, and dispensing areas.



Highbay Mount



*Each StaxMAX™ flood fixture module can be configured with either narrow, medium or wide optics.



Arch Yoke Mount

CLASSIFICATIONS & RATINGS:

- Class I, Division 2, Groups A, B, C, D
- See table on page 2 for Temperature Code and ambient temperature ranges

ELECTRICAL:

- 15,830 lm to 56,910 lm
- 120-277V or 347-480V available
- Power Factor: > 0.90

MOUNTING:

- Arch Yoke mount for flood applications
- Highbay mount

CONSTRUCTION:

- Die cast ADC12 aluminum housing
- Tempered glass lens
- Polyester powder coat finish

WARRANTY:

5-year standard warranty* (further details available at www.maxlite.com/warranties)

*Product may be eligible for a warranty extension to 10 years, for an additional fee. Contact MaxLite for details.

MODEL SELECTION		Typical order example: ELLF135UW50AGSH12						
ELLF					50		G	SH12
SUB FAMILY	NOMINAL WATTAGE, EQUIVALENCY	VOLTAG	DISTRIBUTION	CCT	MOUNTING BRACKET	FINISH	HAZARDOUS LOCATION	
ELLF= Flood Light	135= 135W, 320W PSMH equivalent	U= 120-277V	N= 22°, Narrow distribution	50= 5000K ¹	A= Arch Yoke H= Highbay	G= Gray, std.	SH12= Class I Division 2 Rated	
	270= 270W, 750W PSMH equivalent		M= 55°, Medium distribution					
	405= 405W, 1000W MH equivalent		W= 120°, Wide distribution					
	180= 180W, 400W MH equivalent	4= 347-480V						
	360= 360W, 750W PSMH equivalent							
	540= 540W, 1000W MH equivalent							

Notes:

1. Custom CCTs available. Please contact your MaxLite representative for lead times and quantities.

PROJECT: _____ CATALOG # _____ NOTES: _____ FIXTURE SCHEDULE: _____

HIGH OUTPUT FLOOD CLASS I DIVISION 2 | HL-ELLF SERIES

ACCESSORIES:

ORDER CODE	MODEL	DESCRIPTION	ACCESSORIES IMAGE
72881	PTMB	Pole Tenon Mount bracket (To be used with HBMB bracket only)	

SPECIFICATIONS:

		ELLF 135XX50	ELLF 270XX50	HL-ELLF 405XX50	HL-ELLF 180XX50	HL-ELLF 360XX50	HL-ELLF 540XX50
ITEM	SPECIFICATION	DETAILS					
GENERAL PERFORMANCE	Input Power (W)	140	280	420	180	360	540
	Lumens Delivered (lm)	Up to 15,830	Up to 31,660	Up to 47,490	Up to 18,970	Up to 37,940	Up to 56,910
	Efficacy (lm/W)	96-112					
	CRI	≥75					
	Lumen Maintenance (L70, TM-21 @ 25°C)	≥ 75,000					
	Color Temperature	5000K					
	Spacing Criteria	Available Upon Request					
	Color Consistency	Proprietary binning for uniform color					
ELECTRICAL	Current (A)	1.25/0.56 (@120V/277V)	2.45/1.12 (@120V/277V)	3.65/1.68 (@120V/277V)	1.80/0.72 (@277V/480V)	3.60/1.44 (@277V/480V)	5.40/2.16 (@277V/480V)
	Drive Output	48VDC, 3.2A					
	Input Voltage	120-277VAC, 50/60 Hz			347-480VAC, 50/60 Hz		
PHYSICAL	Dimensions (H" x W" x L")	7.4" x 20.4" x 20.4"	14.5" x 21.4" x 21.1"	19.6" x 21.1" x 21.1"	7.4" x 20.4" x 20.4"	14.5" x 21.4" x 21.1"	19.6" x 21.1" x 21.1"
	EPA (sq. ft.)	0.9	1.8	2.7	0.9	1.8	2.7
	Weight (lbs)	14	26	37	14	26	37
	Housing	Low-copper die-cast aluminum, with power coat paint					
	Lens	Tempered Glass					
	Mounting	Module is trunnion mounted to carriage with 270° pivoting bolt					
	Operating Temperature	-40°C to 55°C (-40°F - 131°F)					
CERTIFICATION	Certification	LM-79, LM-80, UL844, UL1598, UL8750					
	Humidity	20-85% RH, non-condensing					
	Material Usage	RoHS compliant; no mercury					
	Environment	IP65					
	Warranty	5-Year					

ORDERING:

ORDER CODE	MODEL	MOUNTING	VOLTAGE	BEAM ANGLE(°)	POWER (W)	OUTPUT (LM)	CCT
74449	ELLF135UM50AGSH12	Arch Yoke	120-277	55	135	14,500	5000K
74448	ELLF135UN50AGSH12	Arch Yoke	120-277	22	135	13,460	
74450	ELLF135UW50AGSH12	Arch Yoke	120-277	120	135	15,830	
74821	ELLF270UM50AGSH12	Arch Yoke	120-277	55	270	29,000	
74820	ELLF270UN50AGSH12	Arch Yoke	120-277	22	270	26,920	
74819	ELLF270UW50AGSH12	Arch Yoke	120-277	120	270	31,660	
74822	ELLF405UM50AGSH12	Arch Yoke	120-277	55	405	43,500	
74797	ELLF405UN50AGSH12	Arch Yoke	120-277	22	405	40,380	
74793	ELLF405UW50AGSH12	Arch Yoke	120-277	120	405	47,490	

*Please contact your MaxLite representative to order products that don't have order codes listed here. Special order, contact Maxlite for MOQ and leadtime.




PROJECT: _____ CATALOG # _____ NOTES: _____ FIXTURE SCHEDULE: _____

HIGH OUTPUT FLOOD CLASS I DIVISION 2 | HL-ELLF SERIES





DIMENSIONS

ALL MEASUREMENTS ARE IN MILLIMETER

PTMB DETAILS

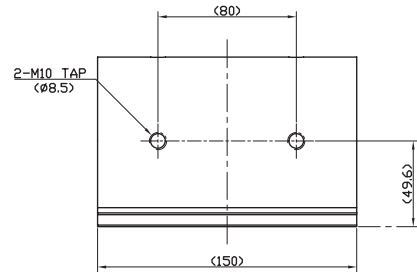
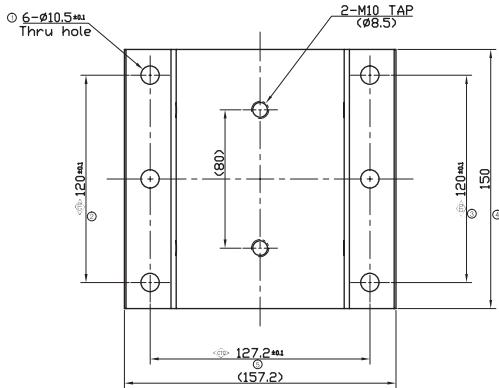


AYMB DETAILS

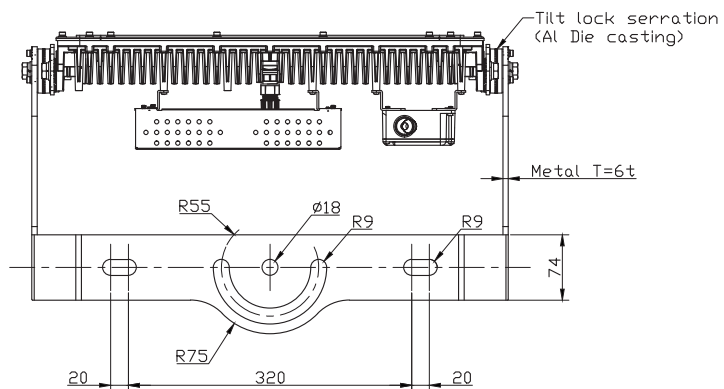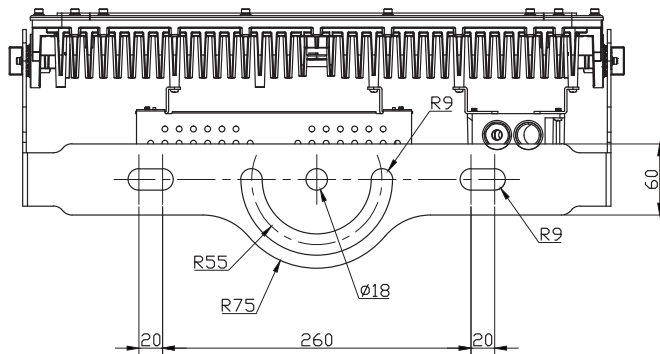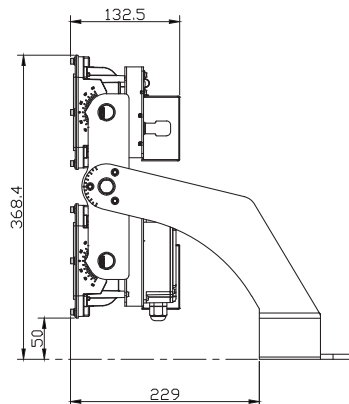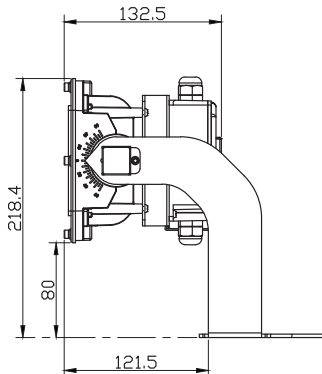

PROJECT: _____ CATALOG # _____ NOTES: _____ FIXTURE SCHEDULE: _____

HIGH OUTPUT FLOOD CLASS I DIVISION 2 | HL-ELLF SERIES

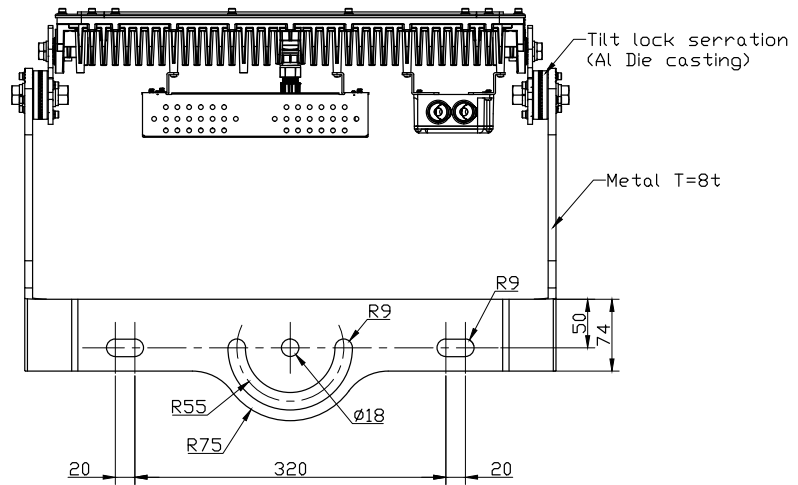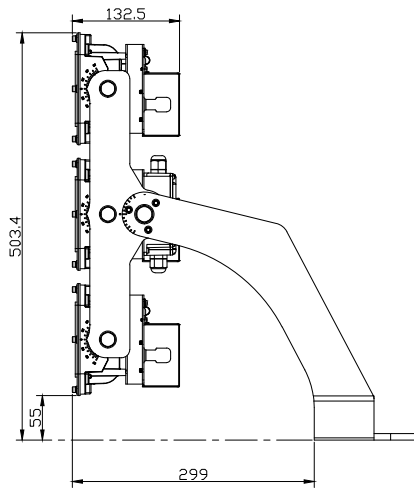

HBMB DETAILS

