

# Aluminum Exit & Combo Signs

## FEATURES:

- Universal operating voltage 100V-300V
- Maintenance free NiCd battery
- Brushed Aluminum Face Plate over UV stabilized UL-94VO thermoplastic housing
- Top, side, or j-box mounting using the universal mounting plate and canopy
- Removable, universal chevrons for directional indication
- Snap-fit faceplate design for easy installation without tools
- Available with red or green diffuser
- Extra faceplate included for single or double-face installation
- Temperature rating: 10°C - 40°C for damp location
- AC versions available as special order
- Combos include adjustable 45 degree LED lightbar at the bottom of the fixture. CCT Output: 6000K

## LISTINGS:

- CSA listed to UL924 for Damp Locations (DL)

## WARRANTY:

5-year standard warranty\* (further details available at [www.maxlite.com/warranties](http://www.maxlite.com/warranties))

\*Product may be eligible for a warranty extension to 10 years, for an additional fee. Contact MaxLite for details.



EXA-RW




EXAC-GW

## ORDERING INFORMATION:

PRODUCT IMAGE	ORDER NUMBER	MODEL	DESCRIPTION
	108895	EXA-RW	THIN ALUMINUM EXIT, RED, BATTERY BACKUP
	108896	EXA-GW	THIN ALUMINUM EXIT, GREEN, BATTERY BACKUP
	108897	EXAC-RW	THIN ALUMINUM EXIT COMBO, RED, BATTERY BACKUP
	108898	EXAC-GW	THIN ALUMINUM EXITS COMBO GREEN, BATTERY BACKUP <b>*Coming in Fall of 2022</b>

## DIMENSIONS:

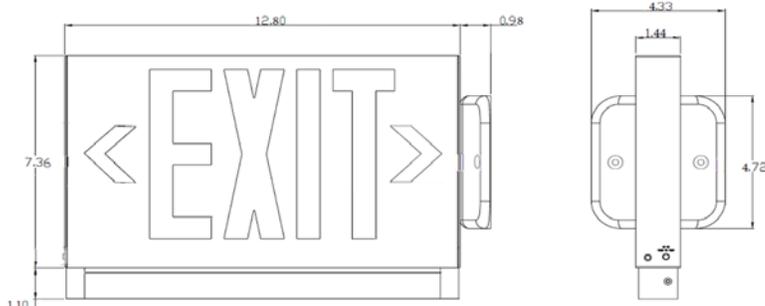

Exit sign measures at 7.36" H and Combo sign measures at 8.46" H