



PROJECT NAME: _____ CAT. #: _____
 NOTES: _____ FIXTURE SCHEDULE: _____

Garage Light



Features

- 4 adjustable LED panels. Each panel can adjust to 0-90°
- Daisy-chain linkable design
- On/Off switch with plug
- No bulb socket required. Installed anywhere light is needed
- CRI: 83
- CCT: 5000K

Construction

- Aluminum heatsink
- Plastic housing
- PC lens

Warranty

- 1 year standard

Listings

- ETL Listed

Ordering Information


FAMILY	-	WATTAGE	VOLTAGE	COLOR	CCT DEDICATED
GL = Garage Light		054 = 54W	U = 120V	B = Black	50 = 5000K

Stocked Items

ORDER CODE	MODEL NUMBER
109540	GL-054UB50

Specifications

	GL-054UB50
NOMINAL WATTAGE (W)	54
DELIVERED LUMENS (LM)	5400
EFFICACY (LM/W)	≥100
CRI	83
CCT (K)	5000K
L70 LIFETIME (HRS)	20,000Hrs
VOLTAGE	120V
POWER FACTOR	≥ 0.9
OPERATING TEMPERATURE	-4 - 104°F (-20-40°C)
LISTINGS	ETL Listed
ENVIRONMENT	Damp
WARRANTY	1 Years

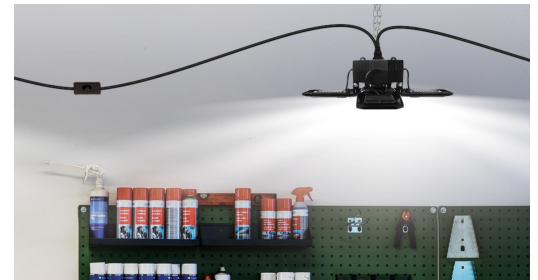



Garage Light

Dimensions

