

**LED WIDE BODY UTILITY WRAP**  
**LSUW SERIES**



**PRODUCT DESCRIPTION:**

The LSU Wide Body Utility Wrap is a cost effective LED utility wrap fixture. The product is constructed with a full length clear acrylic prismatic lens and a one piece steel body and end caps with KO. Product applications include utility lighting, parking garage lighting, and stairwell lighting.

**FEATURES:**

- 0-10V dimming standard
- Universal voltage 120-277V
- L70 lumen maintenance of 100,000 hours
- Surface mount standard and suspension kit optional

**CONSTRUCTION:**


- Steel Construction
- Back and end knockouts
- White finish standard

**WARRANTY:**

10-year standard warranty with labor allowance\* (further details available at [www.maxlite.com/warranties](http://www.maxlite.com/warranties))  
\*Warranty Limitations: Product must be rated for the application per the Product Data Sheet (PDS); operated <16 hrs; in ambient of -4°F to 104°F.

\*Up to \$25/unit; labor allowances of up to \$500/unit available for purchase – contact MaxLite representative for details.

**LINE DRAWING:**

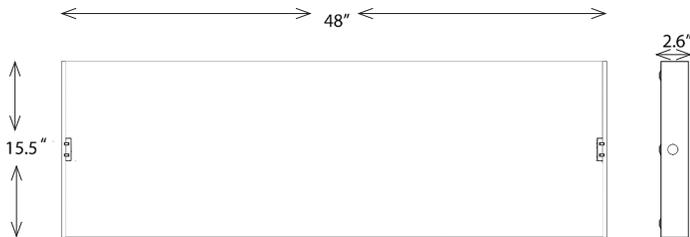

FAMILY	LENGTH	VOLTAGE	NOMINAL WATTAGE	CCT	OPTIONS
<b>LSUW=</b> Linear Strip Utility Wrap Wide	<b>4=</b> 4 ft	<b>U=</b> 120-277	<b>62=</b> 62W	<b>40=</b> 4000K <b>50=</b> 5000K <sup>3</sup>	<b>(OMIT)=</b> None  <b>EM=</b> Battery Backup Unit <sup>1</sup> <b>MS=</b> Bi-level motion sensor with Daylight Harvesting <b>MSO=</b> On/Off Motion Sensor <b>MSV=</b> CA Title 24 Motion Sensor <sup>2</sup> Remote commissionable

**NOTES:**

1. In the event of a power failure, the battery backup unit switches to emergency mode (700 lumen output) and operates the fixture for a minimum of 90 minutes
2. Remote sold separately.
3. 5000K is available as special order.

**SPECIFICATIONS:**

**LSUW4U6240**

ITEM	SPECIFICATION	DETAILS
<b>GENERAL PERFORMANCE</b>	Power Consumption (W)	62W
	Lumens Delivered (lm)	8,060
	Efficacy (lm/W)	130
	CRI	≥80
	Color Temperature (K)	4000K & 5000K
	L70 (hours)	100,000
	Color Consistency	Proprietary binning for uniform color
<b>ELECTRICAL</b>	Power Factor	≥0.9
	Input Voltage	120-277V
<b>PHYSICAL</b>	Lens	Acrylic Prismatic
	Housing	Steel Construction
	Mounting	Surface mount standard. Suspension kit optional (Sold Separately)
	Operating Temperature	-4°F to 104°F
	Humidity	10-80% RH, non-condensing
<b>CERTIFICATION</b>	Certification	cULus Listed
	Material Usage	RoHS compliant; no mercury
	Environment	Indoor / Damp
	Warranty	10 Years
<b>QUALIFICATION</b>	DesignLight Consortium	DLC Premium

**ORDERING CODE:**

ORDER CODE	MODEL NUMBER	DLC PRODUCT ID	SIZE	WATTAGE	CCT
102930	LSUW4U6240	PRA2HRG0	4 ft	62	4000K
103151	LSUW4U6250	PUT7UQVI		62	5000K

Please contact your MaxLite representative to order products that don't have order codes listed here.

**ACCESSORIES:**

ORDER CODE	MODEL NUMBER	DESCRIPTION
74626	MLCHKLSULB15	UTILITY WRAP LOWBAY CABLE KIT
108133	RMHYTHRC-05	REMOTE CONTROL FOR MSV SENSOR OPTION (SOLD SEPARATELY)

**COMPATIBLE DIMMERS:**

MAKE	DIMMER MODEL
Lutron	NFTV0-10
Leviton	IP710 DL

**SENSOR INFORMATION:**

SENSOR	TECHNOLOGY	DIMMING	DAYLIGHT HARVESTING	REMOTE CONTROL	QR CODE
MS	PIR	BI-LEVEL	SET POINT	NO	
MSO	PIR	ON/OFF	SET POINT	NO	
MSV	HIGH FREQUENCY	BI-LEVEL	SET POINT	YES	

For motion sensor settings and information, please visit [www.maxlite.com/controls](http://www.maxlite.com/controls)