



PROJECT NAME: _____ CAT. #: _____
 NOTES: _____ FIXTURE SCHEDULE: _____

MLVT ArcMax Troffer Control Ready Series *Wattage and Color Selectable*



Product Description:

ArcMAX™ Lay-In LED panels are the eye-pleasing and energy-efficient replacement for fluorescent troffers in new or remodel construction. CCT and wattage selectable technology enables customers to choose the color temperature and lumen output that is best suited for their lighting application. The panel's high-performance optic system delivers beautifully even light with excellent color rendering and low glare, while its architectural design features make it the perfect complement to office, education, health care, hospitality and retail interiors.

Features:

- Wattage and CCT Selectable
- Controls Ready – can be paired with the new cMax controls nodes
- CCT Selectable: 3500K, 4000K, 5000K
- Life Hours: 100,000 Hrs
- On EM mode, the fixture output a minimum of 700 lumens for 90 minutes, when fully charged

Controls Ready:

MaxLite's new Controls Ready (CR) fixtures allows for quick and easy in-field installation (plug and play) of controls. Simply purchase any CR fixture and the required Controls Node and you're all set! See the accessory table for all controls options available for this fixture.



Order Structure

FAMILY	SIZE	DIMMING	WATTAGE SELECTABLE	CCT SELECTABLE	CONTROLS READY	OPTIONS
MLVT= Volumetric Troffer	14= 1'x4'	D= Dimmable	16W= 16W, 20W, 30W	CS= CCT Selectable 3500K, 4000K, 5000K	CR= Controls Ready	BLANK= None EM= Battery Backup Unit
	22= 2'x2'		20W= 20W, 30W, 40W			
	24= 2'x4'		30W= 30W, 40W, 50W			

NOTES:

1. EM mode, fixture will function only at 5000K CCT
2. Default setting are set to lowest wattage and at 4000K.

Stocked Items

ORDER CODE	MODEL NUMBER	DLC PRODUCT ID#
105610	MLVT14D16WCSCR	P4V86B7T
105639	MLVT22D20WCSCR	PYWAJZSX
105647	MLVT24D30WCSCR	PQEEXKWF



10-year standard warranty with labor allowance (further details available at www.maxlite.com/warranties)

Warranty Limitations: Product must be rated for application per the Product Data Sheet (PDS); operated ≤16 hrs; in ambient temperatures -4°F to 77°F. If ambient temperatures fall outside the -4°F to 77°F range, product is warranted for 5 years according to the operating temperature range specified on the PDS. Up to \$25/unit; registration required. Additional coverage may be available for purchase; contact MaxLite. Excludes EM/MS versions; component warranty applies.

MLVT ArcMax Troffer Control Ready Series *Wattage and Color Selectable*

Accessories (SOLD SEPARATELY)

ORDER CODE	MODEL NUMBER	DESCRIPTION	IMAGE
104817	ML14G4FK	Gen 4 1x4' Flat Panel Flange Kit	
104819	ML22G4FK	Gen 4 2x2' Flat Panel Flange Kit	
104820	ML24G4FK	Gen 4 2x4' Flat Panel Flange Kit	
104816	MLG4CHK	Gen 4 Cable Hanging Kit For 1x4 & 2x2 Flat Panel (40" length)	
104848	ML24G4CHK	Gen 4 Cable Hanging Kit For 2x4 Flat Panel - 6 Cables (40" length)	
104883	MLVT14SMK	ArcMax 1X4 Troffer Surface Mount Kit L= 48" X W= 12" X H= 2.6"	
104884	MLVT22SMK	ArcMax 2X2 Troffer Surface Mount Kit L= 24" X W= 24" X H= 2.6"	
104885	MLVT24SMK	ArcMax 2X4 Troffer Surface Mount Kit L= 48" X W= 24" X H= 2.6"	
105567	CN-REMOTE	Control Node Remote Control	
105564	CN-RTMST	Control Node Rectangular, Microwave Motion Sensor, Translucent	
105890	CN-RTPSW	Control Node Rectangular, PIR Motion Sensor/Daylight Harvesting, White	

*Maxlite recommends CN-RTPSW (PIR) sensor for most applications with this fixture.
If CN-RTMST(microwave) is required for an application, Maxlite recommends a pilot test to confirm there is no interference that causes unexpected responses from the microwave sensor.

Sensor

SENSOR	TECHNOLOGY	DIMMING	DAYLIGHT HARVESTING	REMOTE CONTROL	QR CODE
CN-RTMST	Microwave, Photoelectric	Bi-Level	N/A	Yes	
CN-RTPSW	PIR, Photoelectric	Bi-Level	Continuous Adjustment Mode (CAM)	Yes	



MLVT ArcMax Troffer Control Ready Series *Wattage and Color Selectable*

Specifications

MLVT14D16WCSCR			
Size	1'X4'		
Power Consumption	16W	20W	30W
Lumens Delivered	1968/2000/2000 lm	2460/2500/2500 lm	3690/3750/3750 lm
Efficacy	123 lm/w for 3500K models / 125 lm/w for 4000K & 5000K		
CRI	≥80		
Color Temperature (K)	3500K, 4000K, 5000K		
L70 Lumen maintenance	≥100,000 Hrs		
Power Factor	>0.9		
Input Voltage	120-277V, 50/60 Hz		
Mounting	Surface mount, Flange mount and Aircraft cables		
Operating Temperature	-4°F to 104°F (-20°C to 40°C)		
Humidity	10% to 80% RH non-condensing		
Certification	cULus Listed, FCC		
Qualifications	DLC Premium		
Material Usage	RoHS Compliant; No Mercury		
Environment	Damp/ Dry Location		
Warranty	10 Years warranty		

Specifications

MLVT22D20WCSCR			
Size	2'X2'		
Power Consumption	20W	30W	40W
Lumens Delivered	2460/2500/2500 lm	3690/3750/3750 lm	4920/5000/5000 lm
Efficacy	123 lm/w for 3500K models / 125 lm/w for 4000K & 5000K		
CRI	≥80		
Color Temperature (K)	3500K, 4000K, 5000K		
L70 Lumen maintenance	≥100,000 Hrs		
Power Factor	>0.9		
Input Voltage	120-277V, 50/60 Hz		
Mounting	Surface mount, Flange mount and Aircraft cables		
Operating Temperature	-4°F to 104°F (-20°C to 40°C)		
Humidity	10% to 80% RH non-condensing		
Certification	cULus Listed, FCC		
Qualifications	DLC Premium		
Material Usage	RoHS Compliant; No Mercury		
Environment	Damp/ Dry Location		
Warranty	10 Years warranty		



MLVT ArcMax Troffer Control Ready Series *Wattage and Color Selectable*


Specifications

Specifications	MLVT24D30WCSCR		
	2'X4'		
Size	2'X4'		
Power Consumption	30W	40W	50W
Lumens Delivered	3690/3750/3750 lm	4920/5000/5000 lm	6150/6250/6250 lm
Efficacy	123 lm/w for 3500K models / 125 lm/w for 4000K & 5000K		
CRI	≥80		
Color Temperature (K)	3500K, 4000K, 5000K		
L70 Lumen maintenance	≥100,000 Hrs		
Power Factor	>0.9		
Input Voltage	120-277V, 50/60 Hz		
Mounting	Surface mount, Flange mount and Aircraft cables		
Operating Temperature	-4°F to 104°F (-20°C to 40°C)		
Humidity	10% to 80% RH non-condensing		
Certification	cULus Listed, FCC		
Qualifications	DLC Premium		
Material Usage	RoHS Compliant; No Mercury		
Environment	Damp/ Dry Location		
Warranty	10 Years warranty		


MLVT ArcMax Troffer Control Ready Series *Wattage and Color Selectable*

Dimensions

1X4'

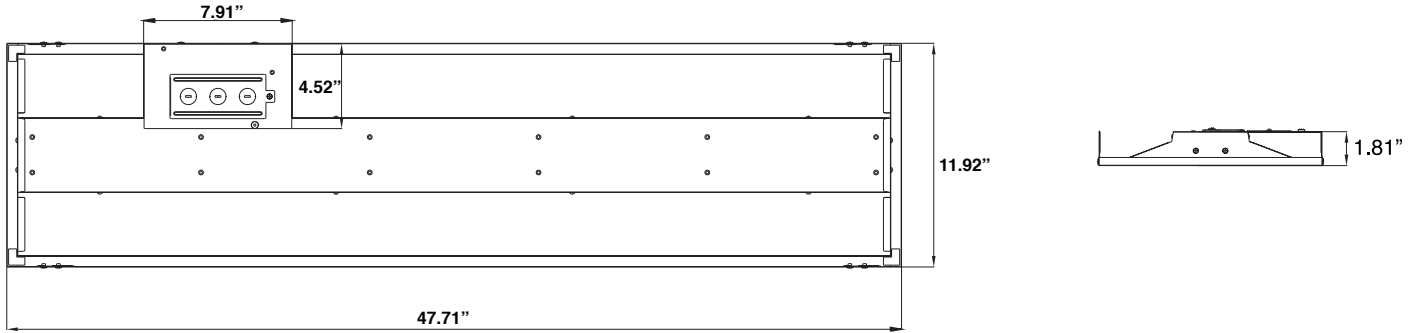

2X2'

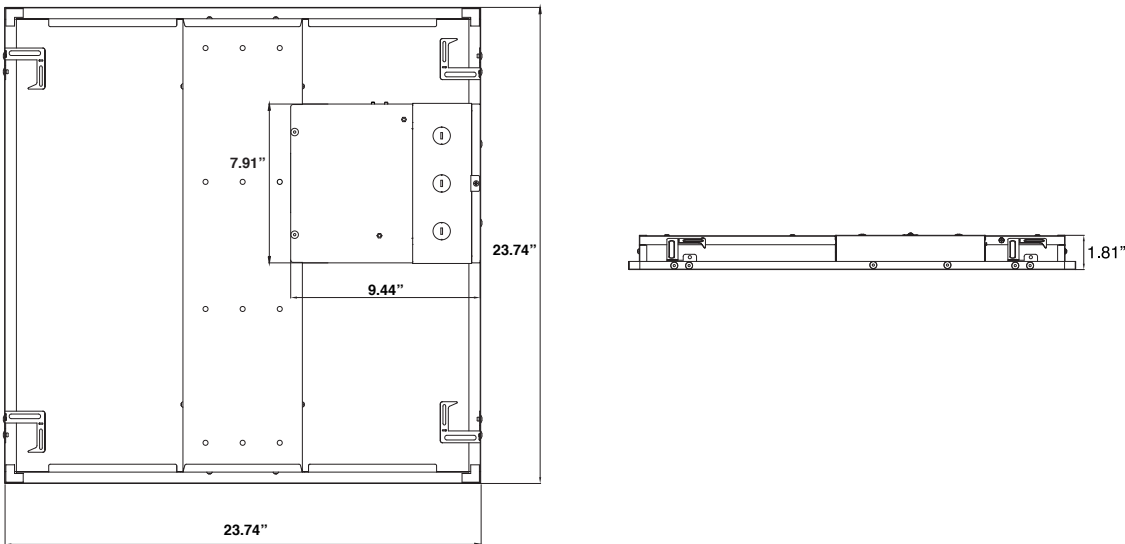

2X4'

