

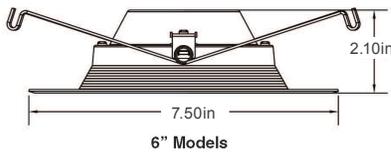


**RESIDENTIAL RETROFIT DOWNLIGHT**  
RR-L SERIES (120V)



**PRODUCT DESCRIPTION:**

Constructed with a high-efficacy LED array and dimmable driver, the Downlight Retrofit features an optical diffuser that produces high lumen transmission and even illumination. The fixtures are suitable for wet locations and are the economical solution for consumers looking to reduce energy costs. These retrofits are offered in a variety of CRI options and lumen packages appropriate for residential applications.

**FEATURES:**

- High lumen transmission and diffusing for even illumination
- Supplied with E26 base adapter
- Suitable for wet locations
- High CRI models support compliance of CEC T20 2016

**CONSTRUCTION:**

- Module construction includes LED, lens, and white trim
- Impact-resistant plastic lens

**ELECTRICAL:**

- 120V, 60Hz
- Dimmable down to 10%
- L70 of 36,000 hours
- Power factor: ≥0.9

**WARRANTY:**

5-year standard warranty\* (further details available at [www.maxlite.com/warranties](http://www.maxlite.com/warranties))

\*Product may be eligible for a warranty extension to 10 years, for an additional fee. Contact MaxLite for details.

**MODEL SELECTION (Full Order List On Page 2)** Typical order example: RR41027W-L9

RR				W	
FAMILY	SIZE	WATTAGE (NOMINAL)	CCT	TRIM	CRI
RR= Residential Retrofit Downlight	4= 4"	10= 10W	27= 2700K 30= 3000K 40= 4000K	W= White	-L9= 80 CRI
	6= 6"	11= 11W 18= 18W			
			18= 18W	27= 2700K	C-L7= 90 CRI

ACCESSORY		
ORDER CODE	MODEL NUMBER	DESCRIPTION
74216	MLRR-E26ADAPT	E26 socket adapter (Included)
73552	MLRR-GUADAPT	GU24 socket adapter

### SPECIFICATIONS:

SPECIFICATIONS:		RR41027W-L9	RR61127W-L9	RR61827W-L9	RR61827WC-L7
ITEM	SPECIFICATION	DETAILS			
GENERAL PERFORMANCE	Wattage	9.6	10.7	17.2	17.4
	Lumens Delivered (lm)	718	848	1386	1290
	Efficacy (lm/W)	75	80	81	74
	CRI	≥80			≥90
	Color Temperature (CCT)	2700K, 3000K (Additional CCT available, contact MaxLite for info.)			
	L70 Lifetime (hours)	36,000			
	Color Consistency	Proprietary binning for uniform color			
ELECTRICAL	Power Factor	0.90			
	Input Voltage	120V			
	Compatible Dimmers	Triac Dimmable			
PHYSICAL	Weight	2 lbs			
	Mounting	Mounts into existing recessed frame			
	Operating Temperature	-4°F to 104°F			
	Humidity	20-85% RH, non-condensing			
CERTIFICATION	Certification	Energy Star, cULus, FCC			
	Material Usage	RoHS compliant; no mercury			
	Environment	Wet Location			
	Warranty	5-year standard warranty*			

### ORDERING:

ORDER CODE	MODEL NUMBER
14099591	RR41027W-L9
14099592	RR41030W-L9
14099599	RR61127W-L9
14099600	RR61130W-L9
14099601	RR61140W-L9
14099607	RR61827W-L9
14099608	RR61830W-L9
107321	RR61827WC-L7

\* PLEASE CONTACT MAXLITE FOR ORDER CODES THAT ARE NOT LISTED HERE.

### DIMMERS:

COMPATIBLE DIMMERS
Lutron DVCL-153PL
Leviton IPL106
Lutron CTELV-303P
Lutron DVELV-300P
Lutron MACL-153M
Lutron SELV-300P-WH