


SLIM DOWNLIGHT
FLUSH SDL SERIES - CCT SELECTABLE

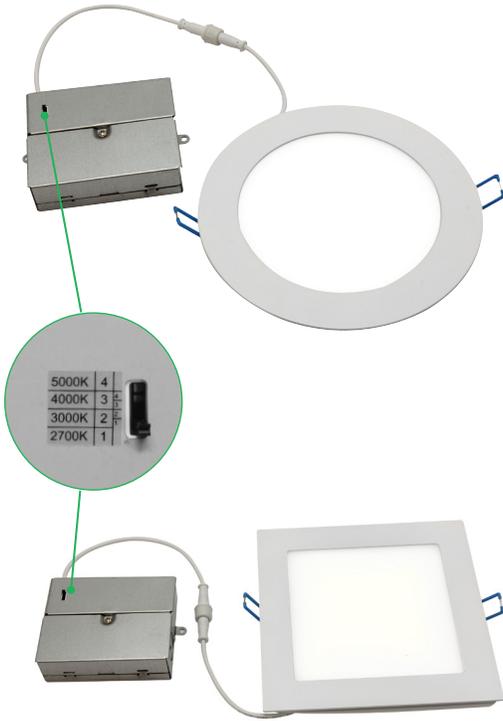

PRODUCT DESCRIPTION:

The CCT Selectable Slim Downlights mount directly into the ceiling, requiring no can. With a simple flick of a switch on the remote driver junction box, installers can choose from 2700K, 3000K, 4000K or 5000K as CCT to suit various application needs. Low profile and easy to install, the Flush style fixture is Energy Star, Wet locations, IC rated and supports Title 24. Its edge lit optics provide an even and low glare illumination with an outstanding color rendering, making it the ideal choice for hospitality, retail, offices and multi-unit residential spaces.

FEATURES:

- 2700K/ 3000K/ 4000K/ 5000K CCT Selectable
- CRI: ≥90
- Beam angle: ~110°
- Mounts into ceiling without the use of separate housing
- Field installable Emergency Battery back up kit available (includes a test switch and the charge indicator kit, no cover)

CONSTRUCTION:

- Module construction includes LED, lens, and white trim
- Impact-resistant plastic lens

DIMMING:

- 120V, Triac dimming (10%)

LISTINGS:

- ETL Listed for wet locations
- ENERGY STAR certified
- IC rated
- Airtight construction
- Supports T24 Part 6 high efficacy lighting requirements

WARRANTY:

5-year standard warranty (further details available at www.maxlite.com/warranties)
Product may be eligible for a warranty extension to 10 years, for an additional fee. Contact MaxLite for details.

MODEL SELECTION (Full Order List On Page 2)			Typical order example: SDLR413CSWJ			
FAMILY	SHAPE	SIZE	WATTAGE	CS	TRIM	CRI/JAB
SDL= Slim Downlight Series, Flush Style	R= Round S= Square	4= 4 in.	13= 13W	CS= 2700K/ 3000K/ 4000K/ 5000K	W= White	J= 90 CRI; T24-JA8-2016 compliant
		6= 6 in.	16= 16W			
		8= 8 in.	20= 20W			

ACCESSORIES:

ORDER CODE	MODEL NUMBER	DESCRIPTION	IMAGE
14098874	RCF-4	4" Commercial Recessed Frame, New Construction	
14098875	RCF-6	6" Commercial Recessed Frame New Construction	
14098876	RCF-8	8" Commercial Recessed Frame, New Construction	
100298	EBUUP15007N0100	Emergency Battery Back up, 07W, 100-347V, Field installable	

ORDER CODES:

ORDER CODE	MODEL NUMBER	ES QPL ID
102887	SDLR413CSWJ	2340215
102888	SDLR616CSWJ	2340216
102889	SDLR820CSWJ	2340217
102890	SDLS413CSWJ	2340211
102891	SDLS616CSWJ	2340212
102892	SDLS820CSWJ	2340214

COMPATIBLE DIMMERS:

MANUFACTURER	MODEL NUMBER
LEVITON	6684, 6672, IPL06, 6681, 6683-10Z
LUTRON	S-600, VWCL-153PH, S-600H, D-600RH-DK, SCL-153P, D-600R, DVCL-153PH, S-600-IV, S-600-AL, DVCL 153P, DVWCL-153PH, AYCL-153P, MACL-153MR, AYCL-153PH, MACL-153MH, DVCL-253PH, MSCL-OP153MH, TGCL-153PH, MACL-153MLH
LEGRAND	6684, 6672, IPL06, 6681, 6683-10Z

SPECIFICATIONS:

ITEM	SPECIFICATION	DETAILS					
		SDLR413CSWJ	SDLR616CSWJ	SDLR820CSWJ	SDLS413CSWJ	SDLS616CSWJ	SDLS820CSWJ
GENERAL PERFORMANCE	Nominal Wattage (W)	13	16	20	13	16	20
	Lumens Delivered (lm)	796	1,126	1,520	836	1,126	1,516
	Lumens Battery Mode (lm)	540	640	670	540	640	670
	Efficacy (lm/W)	66	71	77	66	71	76
	CRI	≥90					
	Color Temperature (CCT)	CS= 2700K, 3000K, 4000K, 5000K/ Default CCT is 3000K					
	L70 Lifetime (hours)	≥50,000 Hrs					
Color Consistency	Proprietary binning for uniform color						
ELECTRICAL	Power Factor	≥0.9					
	Input Voltage	120V, Triac dimming, 10%					
PHYSICAL	Operating Temperature	-4°F - 104°F					
	Humidity	20-85% RH, non-condensing					
QUALIFICATION	Certification	Energy Star, FCC, T24, ETL, IC and AT Rated					
	Warranty	5 year warranty					

DIMENSIONS:

