


**WALLMAX™ THIN CUT OFF**  
**WP-AD SERIES**



**DIMENSIONS: 15W, 20W & 29W:**

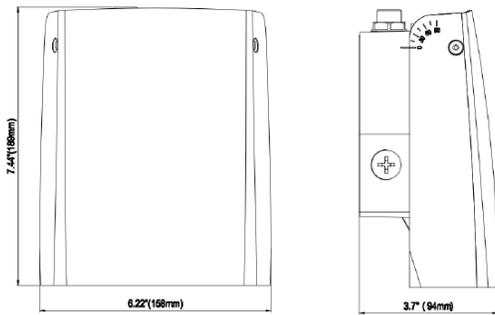

**PRODUCT DESCRIPTION:**

WallMax Thin Cut Off Wall Packs are a full Cutoff wall fixture which includes a photocell with removable cap. Further enhancing the versatility, they are also CCT selectable between 3000K, 4000K and 5000K. These durable, energy-saving fixtures are perfect for lighting outdoor walkways, landscapes and parking areas.

**FEATURES:**

- CCT Selectable between 3K/4K/5K version available
- Full Cutoff optics
- Universal 120-277V
- Battery Backup Options available

**CONTROLS:**

- 120-277V Photocell included with removable cover cap
- Programmable motion sensor available as an option (remote control RMRC-100 sold separately, minimum of 1 required per project)

**WARRANTY:**

10-year standard warranty with labor allowance\* (further details available at [www.maxlite.com/warranties](http://www.maxlite.com/warranties))

\*Warranty Limitations: Product must be rated for the application per the Product Data Sheet (PDS); operated ≤16 hrs/day; in ambient of -29°F to 104°F.

\*Up to \$25/unit; labor allowances of up to \$500/unit available for purchase – contact MaxLite representative for details.

MODEL SELECTION								
WP-AD	S		U	-		B	PC	
FAMILY	HOUSING SIZE	WATTAGE	VOLTAGE	-	CCT	FINISH	PHOTOCELL	OPTIONS
WP-AD=WallMax™ Thin Cut Off	S=Small	15= 15W; 100W MH replacement 20= 20W; 150W MH replacement 29= 29W; 175W MH replacement	U= 120-277V	-	CS= CCT Selectable between 3/4/5K	B= Bronze  Contact MaxLite for additional finishes	PC=120-277V Photocell with removable cap included standard	EMO= Battery Backup 0°C EM2= Battery Backup -20°C MS*= Photo/Motion Sensor (External)

Based on CCT Selected and color mixing, all LEDs may not be activated.  
\* Products with MS-Photo/Motion sensor installed will have photocell disabled

**SPECIFICATIONS:**

		WP-ADS15	WP-ADS20	WP-ADS29
ITEM	SPECIFICATION	DETAILS		
GENERAL PERFORMANCE	Input Power (W)	15.6	19.5	28.4
	Lumens Delivered (lm)	1,900 - 2,050	2,400-2,600	3,450-3,690
	Efficacy (lm/W)	122-131	123-133	121-130
	CRI	>80		
	Lumen Maintenance (L70)	≥100,000		
	Color Temperature	Selectable between 3000K, 4000K and 5000K		
	Operating Temperature	-40°F to 104°F (-40°C to 40°C)		
	Housing	Die Cast Aluminum housing with tempered glass lens		
ELECTRICAL	Power Factor	>0.90		
	Input Voltage	120-277V		
	Battery Backup	120V or 277V only, 800-900 lumens, 1 fc minimum in 10' x 10' grid at 10-11' mounting height 0°C 16W, -20°C 8W		
CERTIFICATION	Material Usage	RoHS compliant; no mercury		
	Environment	Outdoor, Wet location, IP65		
	Qualifications	DLC Premium, FCC, cULus		
	Warranty	10-year standard warranty*		

**ORDERING:**

ORDER CODE	MODEL NUMBER	UPC #	DLC ID NUMBER	DLC CATEGORY	WATTAGE (Nominal)	CCT
105039	WP-ADS15U-CSBPC	767627002335	PY0AVLM4	Outdoor Full-Cutoff Wall-Mounted Area Luminaires	15	Selectable between 3/4/5K
104540	WP-ADS20U-CSBPC	767627972119	P8XWSX4C	Outdoor Full-Cutoff Wall-Mounted Area Luminaires	20	Selectable between 3/4/5K
104541	WP-ADS29U-CSBPC	767627972126	PMNMF0D	Outdoor Full-Cutoff Wall-Mounted Area Luminaires	29	Selectable between 3/4/5K

**ACCESSORY:**

ORDER CODE	MODEL NUMBER	DESCRIPTION	IMAGE
104799	RMRC-100	REMOTE CONTROL FOR SHARKWARD PRODUCTS, RANGE 50FT INDOORS, NO BACKLIGHT	