

HBR HIGH BAY ROUND IP65

DESCRIPTION

naturaLED® High Bay Round comes with an IP65 rating, making it able to resist water and withstand various outdoor weather conditions. It's uniquely designed for multiple outdoor settings such as, warehouses, facades, landscapes, perimeter, parking lots and more. Our high bay round are compact, lightweight fixture provides efficiency of 150lm/w and perfect replacement for HID fixture. With the ability to replace up to 400-watt fixture and adjustable pre-installed hook design, it's the perfect easy hanging mount option for any environment that still utilizes traditional HID and linear fluorescent high bay.

APPLICATIONS

Retail, Warehouse, Gymnasium, Industrial Facility, Perimeter, Commercial Lighting

FEATURES

- DLC Premium
- IP65 Rated
- ETL Sanitation Certified
- 1/2" NPT pipe thread
- Material: Die-cast aluminum
- Input line voltage: 120-277V
- Surge protect level: 4KV
- Dimmable: 1-10V
- Power Factor: >0.99
- CRI: 80
- Beam Angle: 110°
- ColorTemp: 5000K
- Operating temperature: -22°F - 113°F
- Hook included and 6-feet SO cord for easy installation

PROJECT:

SCHEDULE:

DATE:

PREPARE BY:

NOTES:



Rated Life Hours 50,000
Warranty 5 Years

SAMPLE NUMBER

LED-FX11HBR90/110/850/IP65

STYLE	FAMILY	DIAMETER	SERIES	WATTAGE	BEAM ANGLE	CRI/COLOR TEMP	RATINGS
LED	FX	11	HBR	90	110	850	IP65
led lighting	fixture	11 inch	high bay round	90 watt	110°	CRI 80 5000K	IP65 Rated



HIGH BAY ROUND IP65 (SANITATION)

HIGHLOW BAY & AREA LUMINAIRES


ORDERING

*P= Premium DLC / *S = Standard DLC

Watts (W)	Ordering Code	Description	CCT (K)	Lumens (Lm)	Diameter	Equiv. Wattage (W)	IP65 Rated	DLC (S/P)
90	7759	LED-FX11HBR90/110/850/IP65	5000K	13,631	11-inch	250-320	•	P


DIMENSIONS

11" - 90 Watt
6.91-lbs

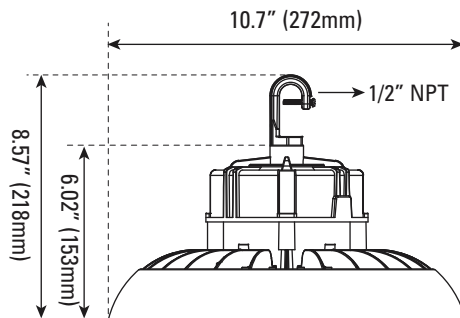

PHOTOMETRICS CHART

11" - 90 Watt
DLC Premium



Center Beam fc	Beam Width
5.0 ft	186 fc
10.0 ft	46.4 fc
15.0 ft	20.6 fc
20.0 ft	11.6 fc
25.0 ft	7.42 fc
30.0 ft	5.15 fc

■ Vert. Spread: 112.2°
■ Horiz. Spread: 113.3°

PACKAGE

Case Qty 1 pc

