

Version	2.0	Date	4/6/23
Prepared By	JC		

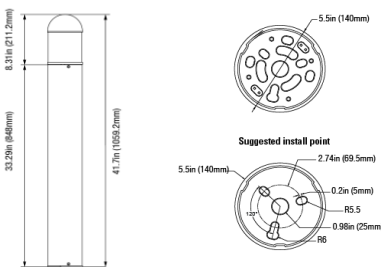
PRODUCT SPECIFICATION			
Category	Bollard		
Item Number	9646		
Stock Code	FX5.5BLD18SW/42RLV/8CCT3/BK		
Mounting	Ground Mounting		
Housing Color	Black (RAL#9005)		
PICTURE			

ELECTRICAL CHARACTERISTICS			
Rated Wattage (W)	10/15/18	Replacement Wattage (W)	100
Tested Wattage (W)	-		
Input Voltage (V)	120-277		
Voltage Frequency (Hz)	50/60	Surge Protect Level	10KV
Input Current (A)	0.16	Dimmable	0-10V
Power Factor	>0.9	AUX (12V) Line	-
THD	<20%		

PHOTOMETRIC CHARACTERISTICS			
Lumen (lm)	1,200 / 1,800 / 2,160	CCT (K)	3CCT (30/40/50K)
Efficacy (lm/w)	125	Beam Angle (°)	360°
CRI	>80		

GENERAL CHARACTERISTICS	
Operating Temperature (°F)	- 40°F ~ 122°F
Storage Temperature (°F)	- 40°F ~ 140°F
IP Rating	IP65
Rated Life (Hrs)	50,000
Warranty (Yrs)	5

ACCESSORIES		
Item #	Stock Code	Description
P10068	PLT-5.5BLD/T3/BK	Type 3 Plate

PRODUCT DIMENSIONS			
Width- in / (mm)	5.5"	140	
Height- in / (mm)	41.70"	1059.2	
Depth- in / (mm)			
EPA (ft²)	-		
Weight (lbs)	11		
Mounting Height (ft)	-		
Cable Length (ft)	-		

CERTIFICATIONS			
UL/ETL	ETL/cETL	CEC	
NSF/ETL Sanitation		JA8	
Energy Star		FCC	✓
DLC		RoHS	✓

DOCUMENTS			
LM79	✓	IES File	✓
LM80	✓	Dimmer List	

COMMENTS