

Version	2.0	Date	5/18/2021
Prepared By	C.L.		

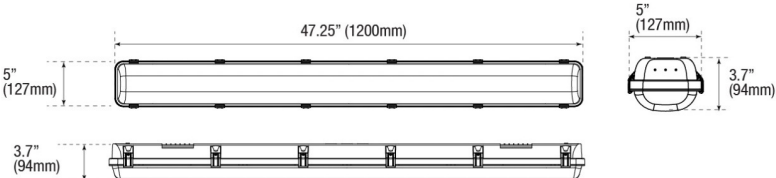
PRODUCT SPECIFICATION			
Category	Vapor Tight		
Item Number	9566		
Stock Code	FXVTL60SW/48FR/8CCT3/347		
Mounting	Ceiling , Wall Mount		
Housing Color	Grey + Frosted PC lens		
PICTURE			

ELECTRICAL CHARACTERISTICS			
Rated Wattage (W)	60 / 45 / 30	Replacement Wattage (W)	3 x 32W T8
Tested Wattage (W)	60		
Input Voltage (V)	120 ~ 347		
Voltage Frequency (Hz)	50/60	Surge Protect Level	4KV
Input Current (A)	0.55 (@120)	Dimmable	0-10V
Power Factor	>0.9	AUX (12V) Line	No
THD	≤ 20%		

PHOTOMETRIC CHARACTERISTICS			
Lumen (lm)	7800 / 5850 / 3900	CCT (K)	3500 / 4000 / 5000
Efficacy (lm/w)	130	Beam Angle (°)	110
CRI	> 80		

GENERAL CHARACTERISTICS	
Operating Temperature (°F)	-40 ~ 122
Storage Temperature (°F)	-40 ~ 158
IP Rating	IP66
Rated Life	50000 hrs.
Warranty	5 years
NEMA rated enclosure	NEMA - 4X

ACCESSORIES		
Item #	Stock Code	Description
P10234	SEN-MC605V-D	120V ~ 277V Microwave Motion Sensor
K7334412	FXVTL-BAEM-MTG1	120V ~ 277V 15W EM Driver Kit
P10411	MT-Linear-45/90	45°/90° Angle Mount Bracket
P10389	SPD-L-10KV-277	10KV Surge protector - 120V ~ 277V
P10390	SPD-L-20KV-277	20KV Surge protector - 120V ~ 277V

PRODUCT DIMENSIONS			
Width- in (mm)	5" (127mm)		
Height- in (mm)	3.7" (94mm)		
Depth- in (mm)	47.5" (1200mm)		
EPA (ft²)	N/A		
Weight (lbs)	5.51 Lbs.		
Mounting Height (ft)	10 ~ 15		
Cable Length (ft)	-		

CERTIFICATIONS			
UL/ETL	ETL/cETL	CEC	
NSF/ETL Sanitation	✓	JA8	
Energy Star		FCC	✓
DLC	V5.0 Premium	RoHs	✓

DOCUMENTS			
LM79	✓	IES File	✓
LM80	✓	Dimmer List	

COMMENTS