

Project	
Schedule	Date
Notes	

DESCRIPTION

Our naturalLED[®] CCM series brings you our square shape surface mount with polycarbonate lens with excellent thermal design. Die cast aluminum housing, uniform and consistent color, DLC listed. CCM is ideal for any locations wall or ceiling mount.

CCM are IP65 Rated and used in damp locations such as canopies, covered walkways, entrance eaves, stairwells, parking, etc.



Optical Lens
Precise Beam Control



FEATURES

- IP65 Rated
- Designed for operation in commercial warehouses
- Uniform and consistent color
- Lightweight and easy installation
- 15-30 foot height performance
- CRI: 70
- Input Voltage: 120-277V
- Beam Angle: 140°
- Operating temperature: -22°F - 122°F
- 50,000 Hours rated average life

APPLICATIONS

- Area Lighting
- Security Lighting
- Pathway Lighting
- Perimeter Lighting
- Entryway Lighting
- Parking Garage

WARRANTY

- 5 Year Warranty


Ordering Information		EXAMPLE: LED-FXCCM40/40K/DB			
LED	FX	CCM	40	40K	DB
LED	Category FX Fixture	Style CCM Ceiling Canopy Mount	Wattage 40 40-Watts	Color Temp 40K 4000K	Color DB Dark Bronze

ORDERING

*P= Premium DLC / *S = Standard DLC

Watts (W)	Ordering Code	Description	Color Temp (K)	Lumens (lm)	Color	Equiv. Wattage (W)	Beam Angle	IP65 Rated
40	7166	LED-FXCCM40/40K/DB	4000K	3,429	Dark Bronze	175W	140°	•
40	7167	LED-FXCCM40/50K/DB	5000K	3,429	Dark Bronze	175W	140°	•
60	7084	LED-FXCCM60/40K/DB	4000K	5,258	Dark Bronze	250W	140°	•
60	7085	LED-FXCCM60/50K/DB	5000K	4,948	Dark Bronze	250W	140°	•
40	7538	LED-FXCCM40/40K/WH	4000K	3,429	White	175W	140°	•
40	7539	LED-FXCCM40/50K/WH	5000K	3,429	White	175W	140°	•

SPECIFICATIONS

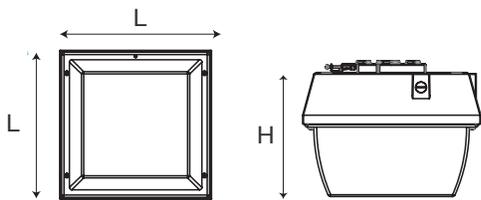


Wattage	Length (L)	Height (H)	Weight
40W	9.00" (228.6mm)	9.00" (228.6mm)	4.70-lbs
60W	12.50" (317.5mm)	12.50" (317.5mm)	7.72-lbs


PHOTOMETRICS CHART

PACKAGE

Master Pack: 1 pc



CCM40 (40W)




Illuminance at a Distance
Center Beam Fc Beam Width

3.0R	24.7 fc	1.6 ft	2.5 ft
6.0R	6.2 fc	3.3 ft	5.0 ft
9.0R	2.7 fc	4.9 ft	7.5 ft
12.0R	1.5 fc	6.6 ft	9.9 ft
15.0R	1.0 fc	8.2 ft	12.4 ft

Vert. Spread: 30.7°
Horiz. Spread: 45.0°

CCM60 (60W)



Illuminance at a Distance
Center Beam Fc Beam Width

3.0R	33.9 fc	1.8 ft	2.9 ft
6.0R	8.5 fc	3.6 ft	4.5 ft
9.0R	3.8 fc	5.5 ft	6.8 ft
12.0R	2.1 fc	7.3 ft	9.1 ft
15.0R	1.4 fc	9.1 ft	11.3 ft

Vert. Spread: 33.8°
Horiz. Spread: 41.4°