

Project

Schedule

Date

Notes

DESCRIPTION

naturaLED® (SCM) Slim canopy is DLC Premium listed and ETL with a rating of IP65. Aesthetically pleasing construction, low-profile design with die-cast aluminum housing and shatter-resistant polycarbonate prismatic lens. Dustproof, sealed structure, 1/2" NPT threaded conduit entrances on each side. This fixture comes with optional motion sensor providing: step dimming, area sensitivity, standby time and on/off. The canopy supports both pendant mounting and direct surface mounting ceiling and wall. The Slim Canopy fixture can be Pendant Mounted and accepts a 3/4" NPT Thread and can be mounted to multiple types of J-boxes. Ideal applications for parking garage, canopy, walkway and entrance lighting etc.




- ▶ Optional Motion Sensor
- ▶ Optional Emergency Backup Driver



FEATURES

- DLC premium qualified
- IP65 rated
- ETL rated
- Title 24
- Bi-level motion sensor
- Long life LED chips
- Shatter-resistant polycarbonate lens
- Finish: Aluminum die-cast
- Input line voltage: 120-277V
- Powerfactor >0.9
- Dimmable: 0-10V
- Operating temperature: -22°F ~ 131°F

DISTRIBUTION PATTERN

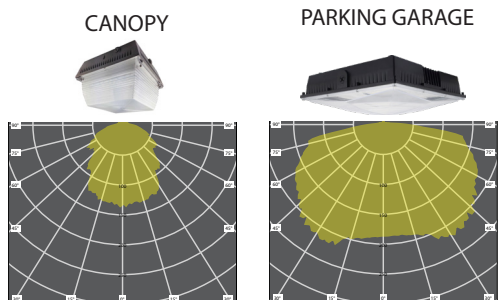

Anti-Glare with uniform and consistent light output.

The optics of our 13" Canopy are engineered designed for **parking garage applications** with improved uniforming consistent light output.

APPLICATIONS

- Warehouses
- Factories
- Hospitals
- Hotels
- Parking and Garage Structure

WARRANTY

- 5 Year Warranty

ACCESSORY

- Emergency Driver



- Motion Sensor



Ordering Information

EXAMPLE: LED-FXSCM60/40K/BK

LED	FX	SCM	60	40K	BK
LED	Category	Series	Wattage	Color Temp	Color
	FX	SCM	60 60W	40K 4000K	BK Black
	Fixture	Slim Canopy			

ORDERING

*P= Premium DLC / *S = Standard DLC

Watts (W)	Ordering Code	Description	Color Temp (K)	Lumens (lm)	Equiv. Wattage (W)	Beam Angle	Rated Hrs	IP65 Rated	DLC (S/P)
60	*9426	*FX12SCM60/840/BK	4000K	7,775	250	160°	50,000	•	P
60	9245	LED-FXSCM60/50K/BK	5000K	7,548	250	160°	50,000	•	P
85	9248	LED-FXSCM85/40K/BK	4000K	10,062	400	160°	50,000	•	P
85	9249	LED-FXSCM85/50K/BK	5000K	10,259	400	160°	50,000	•	P
100	9211	LED-FXSCM100/40K/BK	4000K	12,269	>400	160°	50,000	•	P
100	9212	LED-FXSCM100/50K/BK	5000K	12,516	>400	160°	50,000	•	P

*Please check with your sales rep for new item's availability.

ACCESSORIES SOLD SEPARATELY

Emergency Driver

- 7334 BAEM15-48BC/MV-A
(15W LED Emergency Backup Driver 120-277V)




Motion Sensor

- P10234 SEN-MC605V-D
(Built-In Motion Sensor MV605V D 120-277V)



SPECIFICATIONS

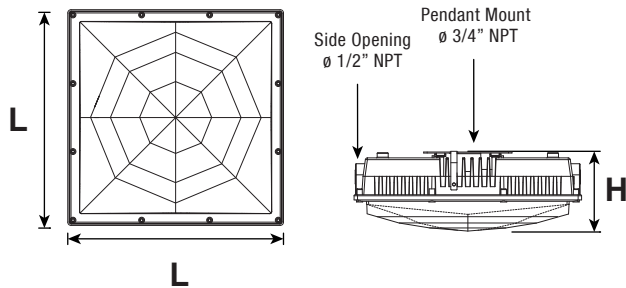


Model	Length (L)	Height (H)	Weight
FXSCM60	13" (330mm)	4.49" (114mm)	7.65-lbs
FXSCM85	13" (330mm)	4.49" (114mm)	8.15-lbs
FXSCM100	13" (330mm)	4.49" (114mm)	8.20-lbs

PHOTOMETRICS CHART

FXSCM60

DLC Premium




Beam Width	Center Beam fc	Beam Width
3.3R	125.6 fc	20.3 R
6.7R	30.5 fc	57.5 R
10.0R	13.7 fc	85.8 R
13.3R	7.75 fc	114.1 R
16.7R	4.91 fc	143.2 R
20.0R	3.43 fc	171.5 R

■ Vert. Spread: 153.7°
■ Horiz. Spread: 160.2°

FXSCM85

DLC Premium




Beam Width	Center Beam fc	Beam Width
3.3R	175.6 fc	27.3 R
6.7R	42.7 fc	56.7 R
10.0R	19.2 fc	84.6 R
13.3R	10.8 fc	112.5 R
16.7R	6.88 fc	141.3 R
20.0R	4.80 fc	169.2 R

■ Vert. Spread: 153.4°
■ Horiz. Spread: 159.2°

FXSCM100

DLC Premium



Beam Width	Center Beam fc	Beam Width
3.3R	211.6 fc	31.1 R
6.7R	51.1 fc	75.3 R
10.0R	22.9 fc	112.4 R
13.3R	13.0 fc	149.5 R
16.7R	8.22 fc	187.8 R
20.0R	5.73 fc	224.9 R

■ Vert. Spread: 159.8°
■ Horiz. Spread: 157.3°

PACKAGE

Master Pack: 1 pc

