

Project _____
 Schedule _____ Date _____
 Notes _____

DESCRIPTION

naturalLED[®] Utility Wrap (UWS) now offers the perfect solution for your lighting needs. The Utility Wrap fixtures are designed for saving energy and easy installation. Available in 29W in two color temperature of 4,000K and 5,000K delivering up to 3,290 lumens with excellent and consistent color. Our Utility Wrap features a full wrap-around UV coated PS plastic prismatic lens and is 48 inches long; designed for junction box installation and works great in parking garages, stairwells, offices, hallways, industrial, commercial and residential, ceiling or wall mounted. This fixture is versatile and efficient.



FEATURES

- DLC Standard Qualified
- Damp Rated
- Lightweight for easy installation
- Excellent thermal design
- Uniform and consistent color
- Long Life LED chips
- UL Listed
- Rated 50,000 hours average life
- UV Coated Frosted Polycarbonate
- Input line voltage: 120-277V
- Input Current: 0.24A
- Power Factor: >0.9
- Surge protect level: 2KV
- Dimmable: 1-10V
- Beam Angle: Flood 100°
- Operating temperature: -22°F ~ 131°F

ACCESSORIES

- Emergency Driver 
- Motion/ Daylight Sensor 
- Wire Guard 
- Wire Cover 

APPLICATIONS

- Conference/Meeting Rooms
- Stairwells
- Schools/Universities
- Hospitals
- Hotels
- Parking Garages

WARRANTY

- 5 Year Warranty


Ordering Information		EXAMPLE: LED-FXUWS29/40K		
LED	FX	UWS	29	40K
LED	Category FX Fixture	Series UWS Utility Wrap	Wattage 29 29 Watt	Color Temp 40 4000K

ORDERING

*P= DLC Premium / S = Standard DLC

Watts (W)	Ordering Code	Description	Color Temp (K)	Lumens (lm)	Equiv. Wattage (W)	Size	Beam Angle	Rated Hrs	Dimmable	Damp Location	DLC (P/S)
29	7074	LED-FXUWS29/40K	4000K	3,220	2 x 32W T8	7" x 48"	Flood	50,000	•	•	S
29	7075	LED-FXUWS29/50K	5000K	3,290	2 x 32W T8	7" x 48"	Flood	50,000	•	•	S

SPECIFICATIONS

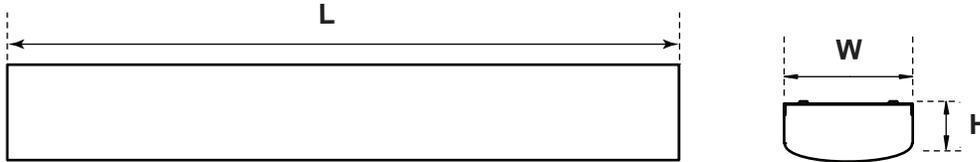

Wattage	Length (L)	Width (W)	Height (H)	Weight (lbs)
29W	48" (1219mm)	6.9" (175.3mm)	2.6" (66mm)	5.50

MOUNTING / ACCESSORIES

SOLD SEPARATELY

Emergency Driver

- 7334 BAEM15-48BC/MV-A (Emergency Driver)




Motion/Daylight Sensor

- P10234 SEN-MC605V-D (Microwave Sensor)



Wire Guard

- P10249 WG-UWS-48WH (Replacement Lens)

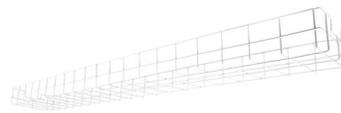


Wire Cover

- P10197 PLT-UWS-4FT-WH (Wire Cover Plate)



PHOTOMETRICS CHART

29 Watt (48")

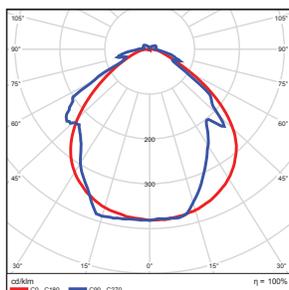

	Center Beam fc	Beam Width	
2.5ft	197 fc	5.4 ft	6.6 ft
5.0ft	49.3 fc	10.9 ft	13.2 ft
7.5ft	21.9 fc	16.3 ft	19.9 ft
10.0ft	12.3 fc	21.8 ft	26.5 ft
12.5ft	7.88 fc	27.2 ft	33.1 ft
15.0ft	5.47 fc	32.7 ft	39.7 ft

■ Vert. Spread: 94.9°
■ Horiz. Spread: 105.9°

PACKAGE

Master Pack: 1 pcs

