

TEMPORARY WORK LIGHT (TL)

Project _____
 Schedule _____ Date _____
 Notes _____

DESCRIPTION

naturaLED® offers our newest temporary work light providing high performance, long lifespan and energy savings for illuminating large industrial, construction and outdoor areas. It is a great replacement or upgrade choice for existing HID, Metal Halide, CFL work light. It is designed to combine the professional brightness intensity of industry-graded high bay fixtures with the convenience of a portable work light. This product is the perfect choice for temporary lighting on new and existing construction sites, short-term maintenance tasks, and warehouses, factories and workshops, highway toll stations, gas stations, exhibition halls.



***WITH 15FT POWER CORD**



FEATURES

- IP64 Rated
- 320° Omni-directional lighting
- 110lm/W ultra-high efficiency delivers superior performance
- Includes 15' power cord with plug and mounting hook
- Instant on
- Suitable for Damp locations
- Built-in connector, outlet for connecting multiple temp lights
- Base up, base down or horizontal operation
- Strong and durable stainless steel lamp guard and hook
- Input line voltage: 120V
- Surge protection: 6KV
- Input Current (A): 0.513
- Voltage Frequency: 50/60Hz
- Operating temperature: -40°F-113°F
- 50,000 hours rated average life

APPLICATIONS

- Site Lighting
- Garage Lighting
- High Bay Ceiling Lighting
- Commercial Work Areas
- Warehouse/ Factory/ Workshop Lighting

WARRANTY

- 5 Year Warranty

Ordering Information		EXAMPLE: LED60TL/FR66/850				
LED	60	TL	FR	66	8	50
	Wattage	Style	Lens	Lumens	CRI	Color Temp
LED	60 60-Watt	TL Temp Light	FR Frosted	66 6,600-lm	8 CRI 80	50 5000K



ORDERING

Watts (W)	Ordering Code	Description	Color Temp (K)	Lumens (lm)	Equiv. Wattage	Beam Angle	Rated Hrs	IP64 Rated	Damp Location
60	4555	LED60TL/FR66/850	5000K	6,600	250W	320°	50,000	•	•

SPECIFICATIONS


60 Watt

Weight: 3.75-lbs

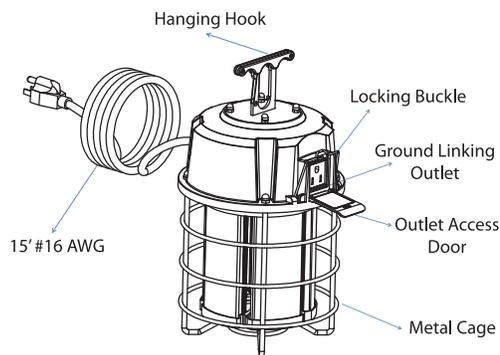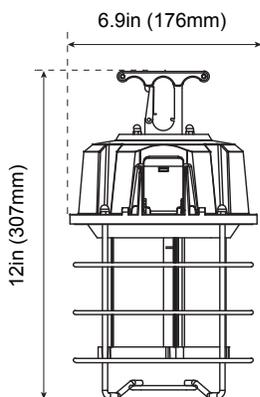

PHOTOMETRICS CHART

60 Watt



Center Beam Fc	Beam Width
2.5R	28.5 fc / 57.2 ft
5.0R	7.13 fc / 114.3 ft
7.5R	3.17 fc / 171.5 ft
10.0R	1.78 fc / 228.6 ft
12.5R	1.14 fc / 285.8 ft
15.0R	0.79 fc / 342.9 ft

■ Beam Spread: 170.0°

PACKAGE

Master: 1pc

