

## NRMC-61 / NRMC-62

### 6" Marquise I Comfort Dim Retrofit Reflectors

Source: 11W LED  
850lm

#### PRODUCT DESCRIPTION

The Marquise Retrofit Series replaces existing recessed trims and light sources. Marquise Series with thermal management system combined in a single compact unit. Cree LED package and Unitized Thermal Management (UTM) system. Outboard mounted driver allows for cooler operation and extends life.

Cree Comfort Dim technology with the highest performing commercially available LEDs and mixes in complementary light from red and unsaturated yellow LEDs to create beautiful, warm, white light. This patented approach enables precise color management to preserve reliable high color consistency over the life of the product.

#### FEATURES

- Retrofit existing architectural or commercial housings with the latest LED technology
- Cree Comfort Dim Technology
- 850lm LED package
- Gradually warms the color temperature from 2700K to 1800K when dimmed
- Can be used to comply with 2016 Title 24 - part 6 High Efficacy LED light source requirements
- ENERGY STAR certified
- cULus classified for Wet Locations
- 5-year Limited Warranty

#### CONSTRUCTION

**Reflector:** Aluminum spun reflector with deep set diffused lens for excellent visual comfort while providing high lumen output.

**Mounting:** Trim includes friction blades to mount trim securely to housing.

#### ELECTRICAL

**Lumens / Wattage:** 850lm / 11W

**Comfort Dim:** Comfort Dim color tunes the temperature from a bright 2700K, to a romantic and comfortable 1800K on a gradual, even curve.

**CRI:** 90+ CRI

**Operating Temp.:** 0°C to 45°C ambient temperature

**Lifetime:** 36,300 hours @ L70

**Dimming:** ELV dimming

[Click Here](#) or check complete dimmer list at

[www.NoraLighting.com](http://www.NoraLighting.com) in the "Compatibility" page under "Resources" tab

#### COMPATIBLE HOUSINGS

Marquise retrofit reflectors are compatible with most 5" IC and Non-IC housings by Nora Lighting and others.

#### FIRE BOX

**NFBIC-6LMRATA** 6" IC Air-Tight Fire Rated Dedicated LED  
**NFBIC-6INCATA** 6" IC Air-Tight Fire Rated Line Voltage

#### NEW CONSTRUCTION

**NHIC-6LMRAT** 6" IC Air-Tight Dedicated LED  
**NHIC-17QAT** 6" IC Air-Tight Line Voltage  
**NHIC-17QNBAT** 6" IC Air-Tight Line Voltage (No bracket)  
**NH-26Q** 6" Non-IC Line Voltage  
**NHIC-6G24ATFL** 6" IC Air-Tight GU24

#### REMODEL

**NHRIC-6LMRAT** 6" IC Air-Tight Dedicated LED  
**NHRIC-17QAT** 6" IC Air-Tight Line Voltage  
**NHRIC-17QNBAT** 6" IC Air-Tight Line Voltage (No bracket)  
**NHR-26Q** 6" Non-IC Line Voltage  
**NHRIC-6G24ATFL** 6" IC Air-Tight GU24

**Retrofit:** Marquise retrofit series includes medium base screw-socket adapter (NRA-211SM) for retrofitting into existing medium base downlight housings. GU24 socket adapter is available for use with GU24 housings, must specify NRA-212SM.

#### LABELS AND LISTINGS

- cULus classified for Wet Location when used with compatible housing
- ENERGY STAR® certified
- Can be used to comply with 2016 Title 24 - part 6 High Efficacy LED light source requirements
- [5-Year Limited Warranty](#)
- ASTM E283 for Air-Tight




Type

Project

Catalog No.

Notes


#### PRODUCT IMAGES AND DIMENSIONS

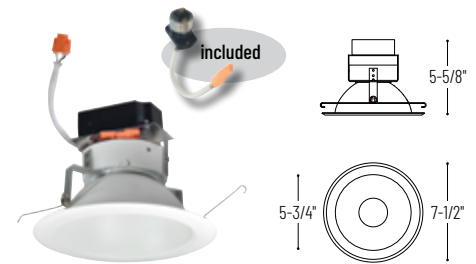

#### NRMC-61

##### Round Open Reflector

BB, BW, BZ, CO, DB, DD, DW, HZ, HZW, MPW, NN, WW

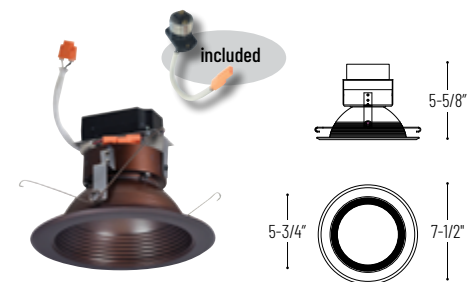

#### NRMC-62

##### Round Baffle

BW, BZ, CO, MPW, NN, WW

### 6" Marquise I Comfort Dim Retrofit Reflector

| Reflector Type                        | Lumens / Wattage         | Color Temp.                           | Finish (see chart below)                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |
|---------------------------------------|--------------------------|---------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>NRMC-61</b> = Round Open Reflector | <b>L85</b> = 850lm / 11W | <b>CD</b> = Comfort Dim (2700K-1800K) | <b>BB</b> = Black / Black Flange<br><b>BW</b> = Black / White Flange<br><b>BZ</b> = Bronze / Bronze Flange<br><b>CO</b> = Copper / Copper Flange<br><b>DB</b> = Diffused Clear / Black Flange<br><b>DD</b> = Diffused Clear / Diffused Flange<br><b>DW</b> = Diffused Clear / White Flange<br><b>HZHZ</b> = Haze / Haze Flange<br><b>HZW</b> = Haze / White Flange<br><b>MPW</b> = Matte Powder White<br><b>NN</b> = Natural Metal / Natural Metal Flange<br><b>WW</b> = White / White Flange |
| <b>NRMC-62</b> = Round Baffle         |                          |                                       |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |

| Available Finishes |    |    |    |    |    |    |    |    |     |     |    |
|--------------------|----|----|----|----|----|----|----|----|-----|-----|----|
|                    | BB | BW | BZ | CO | DB | DD | DW | HZ | HZW | MPW | NN |
| 61                 | *  | *  | *  | *  | *  | *  | *  | *  | *   | *   | *  |
| 62                 | *  | *  | *  | *  | *  | *  | *  | *  | *   | *   | *  |

### Optional Accessories

| Description                                                  |
|--------------------------------------------------------------|
| <b>NRA-211SM</b> = Medium base screw-in socket (included)    |
| <b>NRA-212SM</b> = Socket adapter for use with GU24 housings |

Example: **NRMC-61L85CDWW** = 6" Marquise I Round Open Retrofit Reflector, 850lm / 11W LED, Comfort Dim (2700K-1800K), White Reflector / White Flange