

NRS11-253

Lima Cylindrical MR16 GU10 Luminaire
Source: 50W MR16 GU10 120V (not included)

Type	
Project	
Catalog No.	
Notes	

PRODUCT DESCRIPTION

Line voltage cylindrical GU10 MR16 luminaire with tempered glass sleeve extending in front and back of the light source. Locking front glass protects lamp and provides easy lamp maintenance with minimal interference with original fixture aiming. Luminaire has small stem extending from body ring, allowing full aiming and 350° adjustment with a low profile.

CONSTRUCTION

Housing: Main body constructed from one-piece 0.07" die-cast aluminum.
Stem: Material: 0.07" die-cast aluminum.

ELECTRICAL


Input Voltage: 120V
Wiring: 18 Gauge AWG 200°C, 300V
Socket: GU10 porcelain base with nickel plated copper contacts.
Universal Connector: Construction: 0.07" die cast aluminum shell
Contacts: Copper for positive and neutral Copper contact spring on top to provide solid contact with ground conductor located on top of rail.

LISTINGS AND WARRANTY

· cULus Listed for Dry Location only



PRODUCT IMAGES & DIMENSIONS

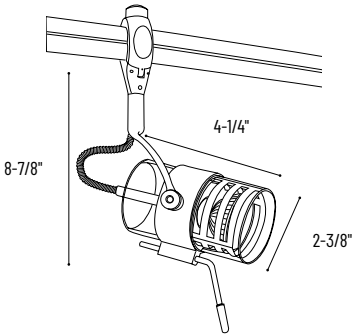

Lima Cylindrical Luminaire

Catalog No.	Finish
NRS11-253	BN = Brushed Nickel BZ = Bronze S = Silver

Example: NRS11-253BN = Lima Cylindrical Luminaire, Brushed Nickel Finish