

NRS11-310
Fili Display Luminaire
Source: 50W MR16 GU10 120V (not included)

Type

Project

Catalog No.

Notes

PRODUCT DESCRIPTION
Line voltage MR16 GU10 luminaire with tapered back and extended arm. Luminaire has a stem extending from back, allowing full aiming and 350° adjustment with a low profile. Lampholder is perforated for proper heat dissipation.


CONSTRUCTION
Housing: 0.07" die-cast aluminum.
Stem Material: 0.07" die-cast aluminum.

ELECTRICAL
Input Voltage: 120V
Wiring: 18 Gauge AWG 200°C, 300V
Socket: GU10 porcelain base with nickel plated copper contacts.
Universal Connector: Construction: 0.07" die cast aluminum shell
Contacts: Copper for positive and neutral Copper contact spring on top to provide solid contact with ground conductor located on top of rail.

LISTINGS AND WARRANTY
· cULus Listed for Dry Location only



PRODUCT IMAGES & DIMENSIONS

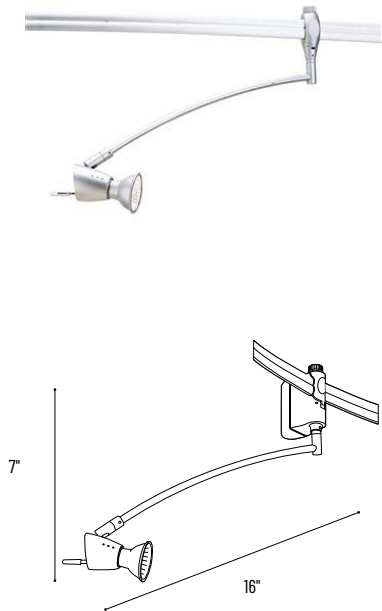

Fili Display Luminaire

Catalog No.	Finish
NRS11-310	BN = Brushed Nickel
	BZ = Bronze
	S = Silver

Example: **NRS11-310BN** = Fili Display Luminaire, Brushed Nickel Finish