


NS-45 Metal Trim with 1" Pinhole

TRIM DIMENSIONS



Trim OD: 5"
Aperture: 1"
Height: 2"

FEATURES

Trim

Metal trim with 1" pinhole. Adjustable ring allows lamp to be mounted on top of the trim and adjustable up to 15°.

Mounting

Trim includes three trim clips that securely mount trim in housing. Remove socket from plate and mount directly onto adjustable ring.

Compatible Housings

Compatible with Line Voltage housings.

See individual specification sheets for more information.

Lamp

Line Voltage

50W R20/PAR20 Max. (NS-401QAT; NSIC-401QAT; NSR-404QAT)

Labels and Listings

cULus Listed for Damp Location when used with compatible housing.

Metal Trim with 1" Pinhole

NS-45: White Metal Trim with 1" Pinhole

NS-45B: Black Metal Trim with 1" Pinhole

NS-45BZ: Bronze Metal Trim with 1" Pinhole

NS-45CO: Copper Metal Trim with 1" Pinhole

NS-45N: Natural Metal Trim with 1" Pinhole

NORALIGHTING.

Type


Project

Catalog No.


Lamp/Wattage

HOUSING DIMENSIONS


NS-401QAT

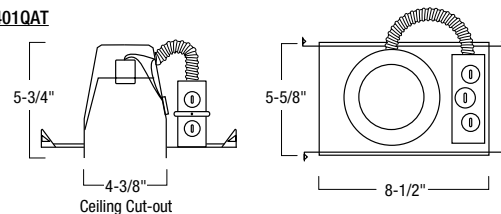

NSIC-401QAT

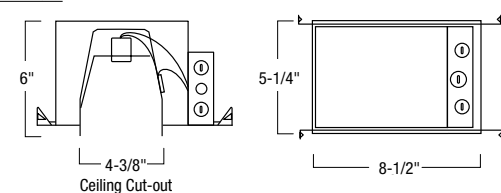

NSR-404QAT

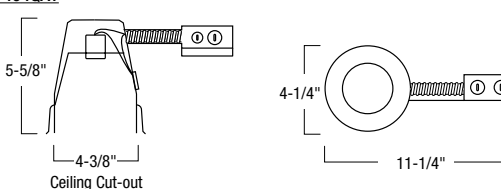

Compatible Housings

LINE VOLTAGE

Item Number	Installation Type	Lamp	Dimensions
NS-401QAT	Non-IC Air-Tight New Const.	50W R/PAR20	W: 5-5/8" L: 8-1/2" H: 5-5/8"
NSIC-401QAT	IC Air-Tight New Construction	50W R/PAR20	W: 5-1/4" L: 8-1/2" H: 6-3/8"
NSR-404QAT	Non-IC Air-Tight Remodel	50W R/PAR20	W: 4-1/4" L: 11-1/4" H: 5-5/8"

NORALIGHTING

6505 Gayhart St., Commerce, CA 90040
www.noralighting.com • Specifications subject to change without notice. © 2011
Phone: 800.686.6672 • FAX: 800.500.9955 • e-mail: nora@noralighting.com