


NS-4912

Surface Gimbal with Square Trim

TRIM DIMENSIONS



Width/Length: 5"
Height: 1-5/8"

FEATURES

Trim

Metal trim with gimbal that can be adjusted up to 20°. Adjustable gimbal allows lamp to be mounted flush with trim.

Mounting

Trim includes three trim clips that securely mount trim in housing. Remove socket from plate and mount lamp into gimbal ring.

Compatible Housings

Compatible with Line Voltage housings.

See individual specification sheets for more information.

Lamp

Line Voltage

50W R20/PAR20 Max. (NS-401QAT; NSIC-401QAT; NSR-404QAT)

Labels and Listings

cULus Listed for Damp Location when used with compatible housing.

NORALIGHTING.

Type


Project

Catalog No.


Lamp/Wattage

HOUSING DIMENSIONS


NS-401QAT

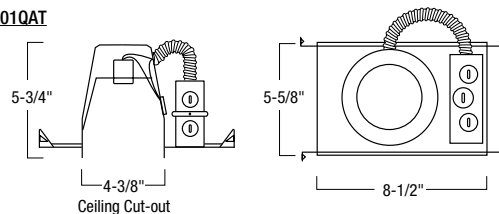

NSIC-401QAT

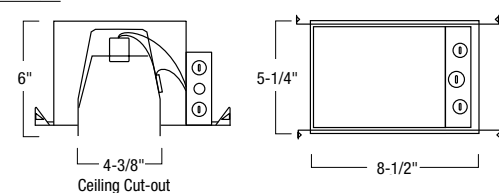

NSR-404QAT

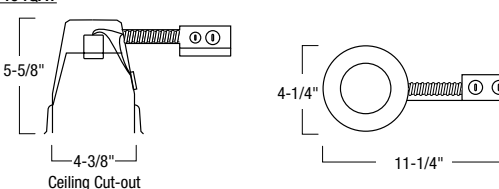

Surface Gimbal with Square Trim

NS-4912BZ: Bronze Surface Gimbal with Bronze Square Trim

NS-4912C0: Copper Surface Gimbal with Copper Square Trim

NS-4912N: Natural Metal Surface Gimbal with Natural Metal Square Trim

NS-4912W: White Surface Gimbal with White Square Trim

Compatible Housings

LINE VOLTAGE

Item Number	Installation Type	Lamp	Dimensions
NS-401QAT	Non-IC Air-Tight New Const.	50W R/PAR20	W: 5-5/8" L: 8-1/2" H: 5-5/8"
NSIC-401QAT	IC Air-Tight New Construction	50W R/PAR20	W: 5-1/4" L: 8-1/2" H: 6-3/8"
NSR-404QAT	Non-IC Air-Tight Remodel	50W R/PAR20	W: 4-1/4" L: 11-1/4" H: 5-5/8"

NORALIGHTING.

6505 Gayhart St., Commerce, CA 90040
www.noralighting.com • Specifications subject to change without notice. © 2011
Phone: 800.686.6672 • FAX: 800.500.9955 • e-mail: nora@noralighting.com