

PART # OD-LLG

OPERATION

WARNING — THE INSTALLATION MUST BE CARRIED OUT BY A QUALIFIED TECHNICIAN.

1. LED light power is 11W
2. The fan & LED light can be operated separately




CAUTION

PLEASE READ INSTRUCTION BEFORE COMMENCING INSTALLATION AND RETAIN FOR FUTURE REFERENCES.

Electrical products can cause death or injury, or damage to property.



If in any doubt about the installation or use of this product, consult a competent technician.

INSTALLATION GUIDE

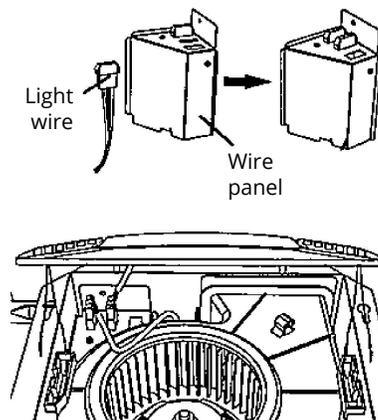

1. Remove the wire panel. Insert the light wire into wire panel. Connect electrical wiring while referring to the diagrams from the WIRING section below
2. Insert the plug from the control box and LED light grille assembly into the suitable wire panel
3. Install grille assembly to the fan

WIRING

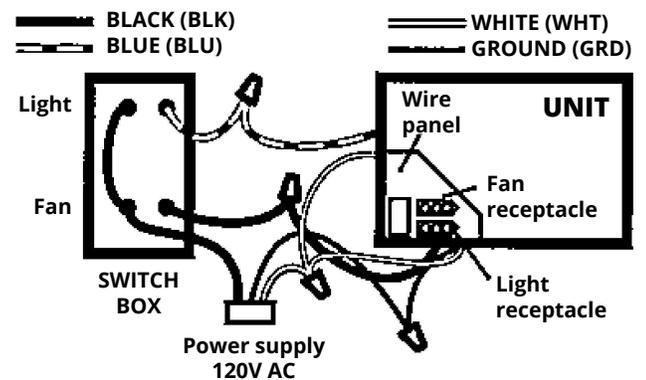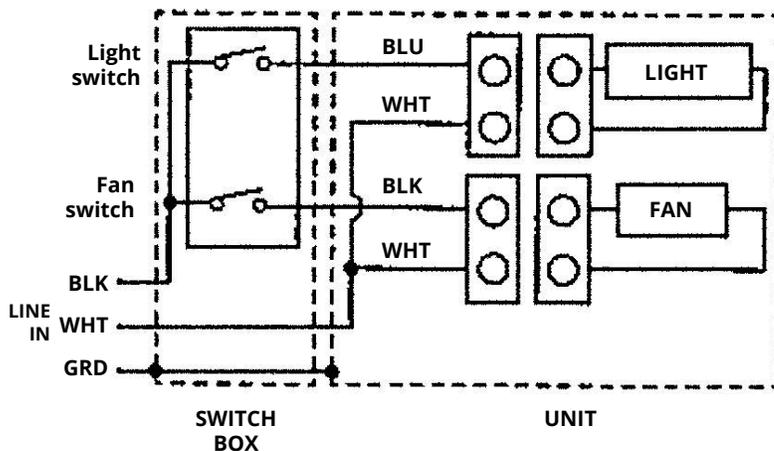

INSTALLATION GUIDE FOR LED GRILLE WITH FIRE DAMPER

Installation with LED Grille & Fire Damper

1. Remove the damper from the flange (4 screws) (see Fig.1)
2. Open the quick connect seat, and place the LED extension cable in the cut out seat. Optionally, open the lower port to fish out the cables. Reconnect the seat and bottom port (see Fig.2)
3. Connect the fan to the quick connect, and slide on the flange, then connect the LED quick connect to the new quick connect port from step 2 (see Fig.3)
4. Slide the damper flange into the fan and re-attach the fire damper to the damper flange. Make sure the LED wire is behind the u-tab to reduce risk of pinching. Secure the flange & fire damper together using the 4 screws from step 1 (see Fig.4)
5. Using the two mounting clips, connect the LED grille to the damper (see Fig.5)



Fig.1



Fig.2



Fig.3



Fig.4



Fig.5

ORTECH reserves the right to modify at any time, without notice, any or all of our product's features, designs, components and specifications to meet market changes.