

LED Flush Mounts

MODEL 1501-113K WH | 1502-143K WH



HIGHLIGHTS


- White paint finish LED Flush Mount available in 11" and 14" with high lumen transmission cover
- Cover made of high quality poly methyl metacrylate (PMMA) material
- High transmittance & UV protection for outdoor light up
- Ensures uniform lighting without black dots or shadow
- Best replacement for fluorescent ceiling lamp
- Easy installation

SPECIFICATIONS

Model	1501-113K WH	1502-143K WH
Wattage	20W	26W
Voltage	120V AC	
Lumens	1400 lmn	2100 lmn
Beam Angle	120°	
Lifetime	50000 hours	
CRI	80	
Dimmable	Yes	
Rating	IC Rated / Indoor use / for Damp location	
Grade of Protection	IP 20	
Applications	Corridors / Lobbies / Kitchens / Balconies / Bathrooms / Bedrooms	
Colour Temp.	3000K (Warm White) / 5000K (Cool White)	
Operating Temp.	-20°C ~ +40°C	
Warranty	5 year	

MODEL 1501-113K WH | 1502-143K WH

DIMENSIONS

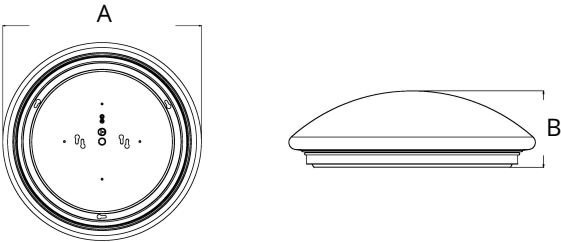

Model	1501-113K WH	1502-143K WH
A	Ø 11" (280mm)	Ø 13-3/4" (350mm)
B	3-13/16" (97mm)	4-3/16" (107mm)



EXPANSION FUNCTION



- SMT (surface-mount) technology, which ensures accurate positions for LED on FPCB (flexible printed circuit board)
- Good quality LGP (light guided panel) and diffuser plate
- Stable design for the whole structure

All these contributes to uniform lighting without black dots or shadow

TESTING REPORT & EXPLOSIVE VIEW

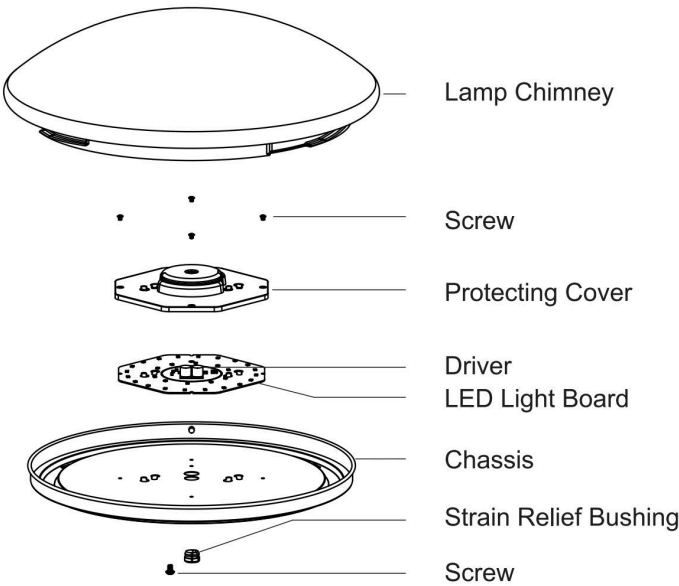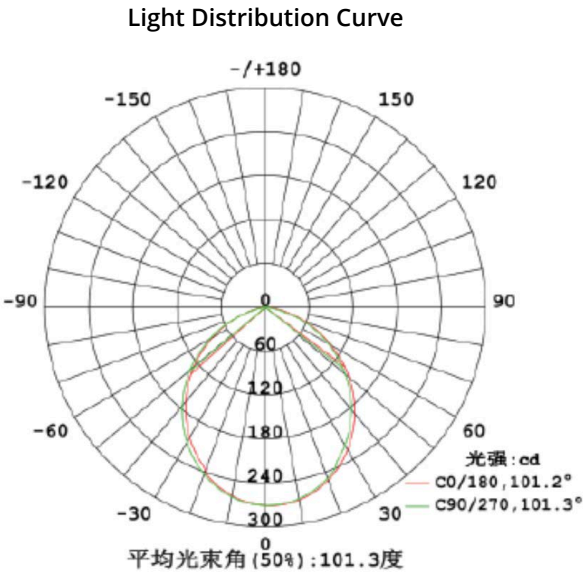

ORTECH reserves the right to modify at any time, without notice, any or all of our product's features, designs, components and specifications to meet market changes.

Reference	QTY.	Remarks	Project:
			Location:
			Architect:
			Engineer:
			Contractor:
			Submitted by:
			Date: