

FLUSH MOUNTS

1501-11WH-3CCT | 1502-14WH-3CCT



HIGHLIGHTS

11" And 14" LED Flush Mounts With High Lumen Transmission Cover, And Selectable CCT

- High lumen transmission cover
- Stable design for the whole structure
- Ensures uniform lighting, no black dots and shadow
- Good quality LGP (Light Guided Plate) and diffuser plate
- Easy installation
- Best replacement for fluorescent ceiling lamp

20-26W

120V AC

1400-2100 LMN

80 CRI

CERTIFICATIONS



COLOUR TEMPERATURE

3000K / 4000K / 5000K (Selectable)



SPECIFICATIONS

MODEL	1501-11WH-3CCT	1502-14WH-3CCT
Wattage	20W	26W
Voltage	120V AC, 60Hz	120V AC, 60Hz
Lumens	1400 lm	2100 lm
Beam Angle	120°	120°
Lifetime	50,000 hours	50,000 hours
Dimmable	Yes	Yes
Grade Of Protection	IP20	IP20
CRI	80	80
Diffuser/Lens Material	PS	PS
Rating	IC rated/Damp location/ Indoor use	IC rated/Damp location/ Indoor use
Operating Temperature	-20°C ~ +40°C	-20°C ~ +40°C
Application	Corridors, Lobbies, Kitchens, Balconies, Bathrooms, Bedrooms	Corridors, Lobbies, Kitchens, Balconies, Bathrooms, Bedrooms

**FLAT-OUT
FABULOUS
CEILING
PERFECTION**

5 YEAR WARRANTY

DIMENSIONS



1501-11WH-3CCT
A - Ø11" (280mm)
B- 3-13/16" (97mm)

1502-14WH-3CCT
A - Ø13-3/4" (350mm)
B- 4-3/16" (107mm)

ORTECH reserves the right to modify at any time, without notice, any or all of our product's features, designs, components and specifications to meet market changes.



FLUSH MOUNTS


1501-11WH-3CCT | 1502-14WH-3CCT



COVER

- High quality PMMA material
- High transmittance
- UV protection for outdoor light up

TESTING REPORT

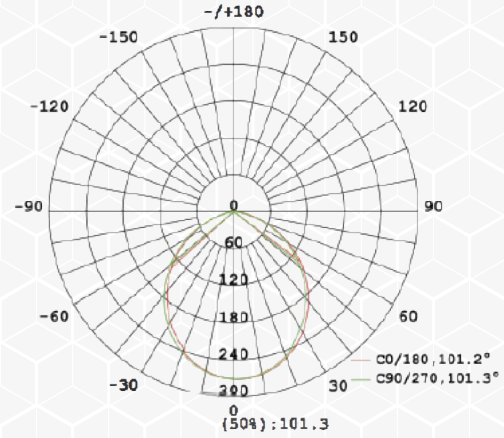

REFERENCE	QUANTITY	REMARKS	PROJECT DETAILS
			Project:
			Location:
			Architect:
			Engineer:
			Contractor:
			Submitted By:
			Date:

ORTECH reserves the right to modify at any time, without notice, any or all of our product's features, designs, components and specifications to meet market changes.

