

FLUSH MOUNTS

3109-3CCT | 3112-3CCT | 3116-3CCT



HIGHLIGHTS

9", 12" And 16" LED Frameless Flush Mount With Good Quality Diffuser Plate, And Selectable CCT

- Rotatable and extremely easy installation
- Good quality LGP (Light Guided Plate) and diffuser plate
- Stable design for whole structure ensures uniform lighting, no black dots or shadow

20-30W

120V AC

1600-2400 LMN

80 CRI

CERTIFICATIONS



COLOUR TEMPERATURE

3000K / 4000K / 5000K (Selectable)




SPECIFICATIONS

MODEL	3109-3CCT	3112-3CCT	3116-3CCT
Wattage	20W	25W	30W
Voltage	120V AC, 60Hz	120V AC, 60Hz	120V AC, 60Hz
Lumens	1600 lmn	2000 lmn	2400 lmn
Beam Angle	120°	120°	120°
Lifetime	50,000 hours	50,000 hours	50,000 hours
Dimmable	Yes	Yes	Yes
Grade Of Protection	IP20	IP20	IP20
CRI	80	80	80
Diffuser/Lens Material	PC	PC	PC
Rating	Non-IC rated/Damp location/ Indoor use	Non-IC rated/Damp location/ Indoor use	Non-IC rated/Damp location/ Indoor use
Operating Temperature	-20°C ~ +40°C	-20°C ~ +40°C	-20°C ~ +40°C
Size	Ø8-7/8"	Ø11-1/2"	Ø15-5/8"

**FLAT-OUT
FABULOUS
CEILING
PERFECTION**

5 YEAR WARRANTY

AVAILABLE COLOURS



3109-3CCT
A - Ø8-7/8" (225mm)
B - 1-1/2" (38mm)

3112-3CCT
A - Ø11-1/2" (293mm)
B - 1-1/2" (38mm)



3116-3CCT
A - Ø15-5/8" (397mm)
B - 1-1/2" (38mm)

ORTECH reserves the right to modify at any time, without notice, any or all of our product's features, designs, components and specifications to meet market changes.




CLOSET LIGHTS

3109-3CCT | 3112-3CCT | 3116-3CCT



TESTING REPORT

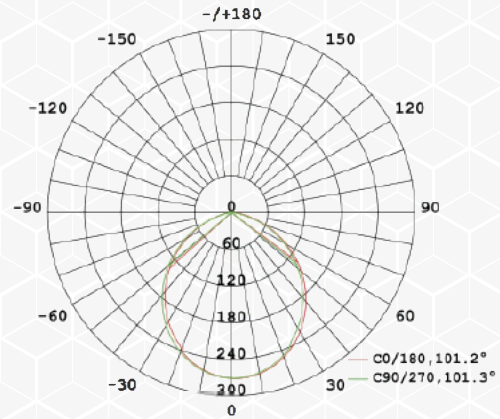

REFERENCE	QUANTITY	REMARKS	PROJECT DETAILS
			Project:
			Location:
			Architect:
			Engineer:
			Contractor:
			Submitted By:
			Date:

ORTECH reserves the right to modify at any time, without notice, any or all of our product's features, designs, components and specifications to meet market changes.

