

FLUSH MOUNTS

4110-3CCT | 4112-3CCT | 4116-3CCT



HIGHLIGHTS

10", 12" And 16" Round LED Flush Mount With Backlight, And Selectable CCT

- Backlight to light up the ambience.
- Rotatable easy installation
- Super Slim Design
- Suitable for damp locations
- Frameless, Uniform Light Distribution (frames sold separately)



CERTIFICATIONS



COLOUR TEMPERATURE

3000K / 4000K / 5000K (Selectable)



SPECIFICATIONS

MODEL	4110-3CCT	4112-3CCT	4116-3CCT
Wattage	15W	18W	30W
Voltage	120V AC, 60Hz	120V AC, 60Hz	120V AC, 60Hz
Lumens	1200 lmn	1440 lmn	2400 lmn
Beam Angle	120°	120°	120°
Lifetime	50,000 hours	50,000 hours	50,000 hours
Dimmable	Yes	Yes	Yes
Grade Of Protection	IP54	IP54	IP54
CRI	80	80	80
Diffuser/Lens Material	PC	PC	PC
Rating	IC rated/Dry & Damp location/ Indoor use	IC rated/Dry & Damp location/ Indoor use	IC rated/Dry & Damp location/ Indoor use
Operating Temperature	-20°C ~ +40°C	-20°C ~ +40°C	-20°C ~ +40°C
Size	250x47.5	300x48.5	400x48.5

**FLAT-OUT
FABULOUS
CEILING
PERFECTION**

5 YEAR WARRANTY

TRIMS (SOLD SEPARATELY)




ORTECH reserves the right to modify at any time, without notice, any or all of our product's features, designs, components and specifications to meet market changes.




CLOSET LIGHTS

4110-3CCT | 4112-3CCT | 4116-3CCT

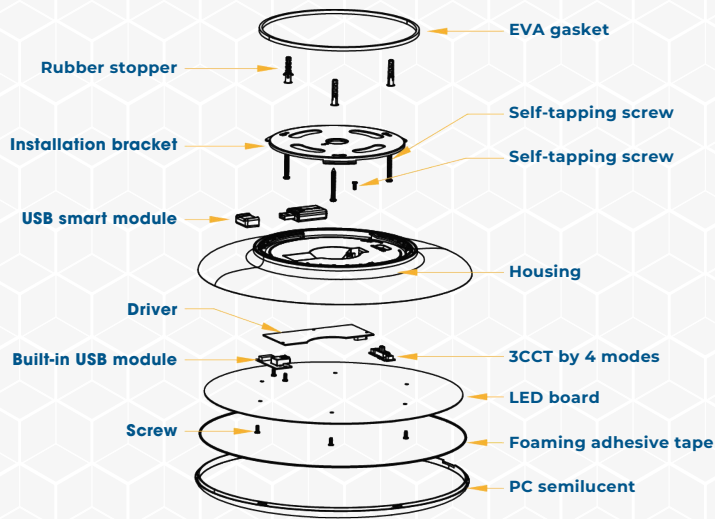

TESTING REPORT



Light Distribution Curve

Height	Beam Diameter	Angle (115.2°)	Distance
1m	159.3, 159.3mm	513.18mm	
2m	318.6, 318.6mm	1026.36mm	
3m	477.9, 477.9mm	1539.54mm	
4m	637.2, 637.2mm	2052.72mm	
5m	796.5, 796.5mm	2565.90mm	



REFERENCE	QUANTITY	REMARKS	PROJECT DETAILS
			Project:
			Location:
			Architect:
			Engineer:
			Contractor:
			Submitted By:
			Date:

ORTECH reserves the right to modify at any time, without notice, any or all of our product's features, designs, components and specifications to meet market changes.

