



HIGHLIGHTS

- 3" Recessed Gimbal Round LED Slim Light of durable aluminum body with driver in connection box
- Depth is 1-3/4", and for the best possible Layout Depth Flexibility, it should be installed right under joists
- Can be installed directly into drywall and IC rated for direct contact with insulation
- Easy and Fast installation — install directly into ceiling with clips
- Suitable for damp location where directly not exposed to rain or snow
- Class 2 transformer in junction box is included
- No housing required

MOUNTING


- Cut hole in ceiling and snap fixture in Opening with attached spring clips
- Ceiling clearance required: 2"

SPECIFICATIONS

Model	DISC3GIM
Wattage	8W
Voltage	120V
Lumens	550 lmn
Beam Angle	120°
Lifetime	50000 hours
Cutout	ø 2-3/4" (70 mm)
CRI	80
Dimmable	Yes
Rating	IC Rated, Indoor use only, for Damp location
Grade of Protection	IP 42
Air Tight	Yes
Applications	Recessed ceiling / Balcony / Overhanging eaves, etc.
Colour Temp.	3000K (Warm White) / 4000K (Natural White) / 5000K (Cool White)
Operating Temp.	-20°C ~ +40°C

MODEL DISC3GIM

DIMENSIONS

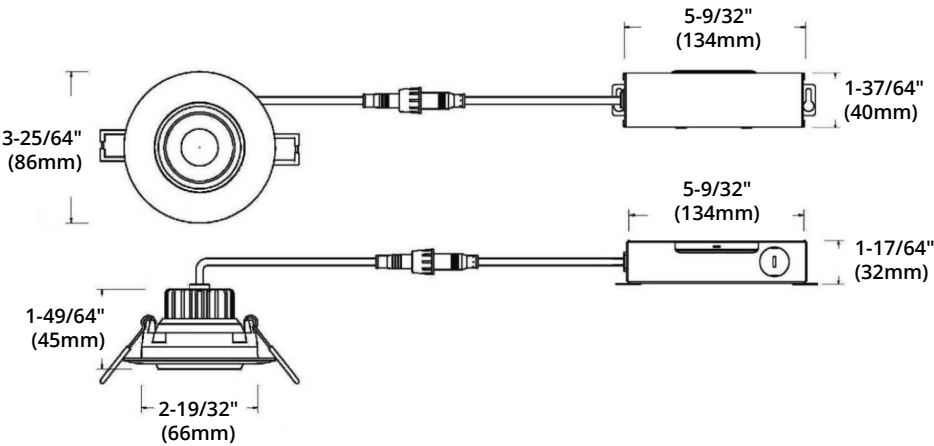

Available in following colours:



DISC3GIM-WH
(White)



DISC3GIM-SN
(Satin Nickel)



DISC3GIM-ORB
(Oil Rubbed Bronze)



DISC3GIM-BK
(Black)

Accessories
(sold separately)



PLATE3-HB

Mounting Plate for
ORTECH 3" Slim Lights



PLATE26-3

New Construction Plate for
ORTECH 3" Slim Lights



DMD-ELV

Single-pole
3 way dimmer



OT-SLIM 2/3

LED Driver for ORTECH
2" and 3" Slim Lights

Reference	QTY.	Remarks	Project:
			Location:
			Architect:
			Engineer:
			Contractor:
			Submitted by:
			Date: