

LED Slim Lights

ORTECH

Product Specification Sheet

MODEL DISC4FL-GM-WH



HIGHLIGHTS

- No recessed housing required
- Compatible with industry standard TRIAC / ELV dimmers
- Easy and Fast installation — install directly into ceiling with clips
- Suitable for damp location where directly not exposed to rain or snow
- Has optical lens with 38° beam spread option, and 90° tilt and 360° rotation
- Ideal for sloped ceilings, wall washing, highlight artwork, task or general lighting, etc.
- Depth is 1-3/8", and for the best possible Layout Depth Flexibility, it should be installed right under joists
- 4" Commercial / Residential grade LED Slim Gimbal Downlight of durable aluminum body perfect for directional accent lighting

MOUNTING

- Ceiling clearance required: 1-1/2"
- Cut hole in ceiling and snap fixture in Opening with attached spring clips


SPECIFICATIONS

Model	DISC4FL-GM-WH
Wattage	9W
Voltage	120V
Lumens	700 lmn at 3000K / 740 lmn at 5000K
Beam Angle	38°
Lifetime	50000 hours
Cutout	ø 4-1/4" (108 mm)
CRI	80
Dimmable	Yes
Rating	IC Rated, Indoor use, for Damp location
Grade of Protection	IP 42
Air Tight	Yes
Applications	Recessed ceiling / Balcony / Overhanging eaves, etc.
Colour Temp.	3000K (Warm White) / 5000K (Cool White)
Operating Temp.	-20°C ~ +40°C


LED Slim Lights

MODEL DISC4FL-GM-WH

DIMENSIONS

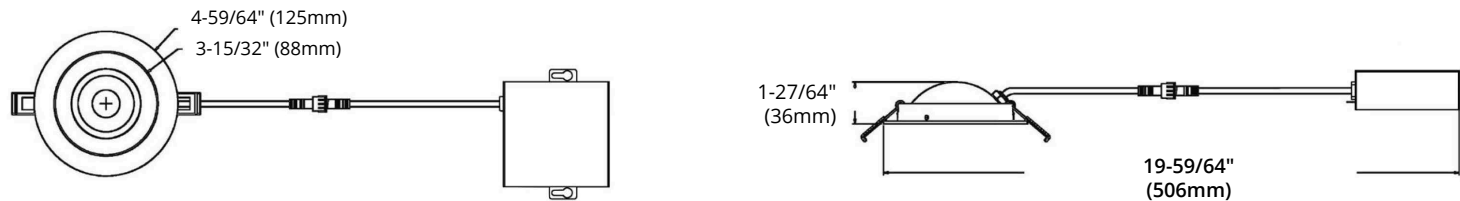

EXPANSION FUNCTION

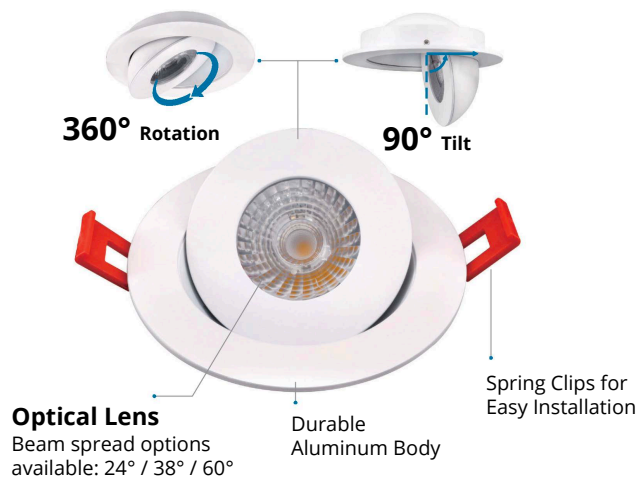

Accessories
(sold separately)



PLATE4-HB

Mounting Plate for ORTECH 4" Slim Lights




PLATE26-4

New Construction Plate for ORTECH 4" Slim Lights



DMD-ELV

Single-pole 3 way dimmer



OT-SLIM 4

LED Driver for ORTECH 4" Slim Lights

Reference	QTY.	Remarks	Project:
			Location:
			Architect:
			Engineer:
			Contractor:
			Submitted by:
			Date: