

MODEL FIRE DAMPER-PB



CEILING DAMPER SQUARE AND RECTANGULAR
 U.L. 555C CLASSIFIED ASSEMBLIES AND ULC S112.2 LISTED
Approved for 1-3 Hour Rated



HIGHLIGHTS

- Has a flexible fire blanket
- Link that is of +165°F Standard
- 21 gauge Galvanized steel for frame
- Fire Dampers for ALL ORTECH PB fans
- Includes fiberglass cover and ceramic fiber
- Ceiling radiation damper with 3 hour rating
- Comes with roll-framed frame made of galvanized steel
- Spring steel rolled springs included, and the force of one springs is no less than 4.496 lbf

SPECIFICATIONS

Model	Fire Damper-PB
Material	Galvanized Steel Frame, Fabric
Galvanized Steel	21 gauge, for frame
Fabric	1/8" thick, 12.484 lbs/ft ³ , environment temperature +1100°C
Fusible Link	165°F, 29/64" width
Springs	Spring steel rolled, 19/32" width, force of 1 springs ≥ 4.496 lbf


Compatible Fans (sold separately)



- ODD-300
- ODD-110-18PB
- OD45-9005PB
- OD45-1109PB
- OD-9005PB
- OD-1109PB
- OD-1209PB
- OD-1505PB
- ODDSS-100
- ODDSS-100-3HS

All ORTECH UNIVERSAL & PREMIUM SERIES PB fans

DIMENSIONS

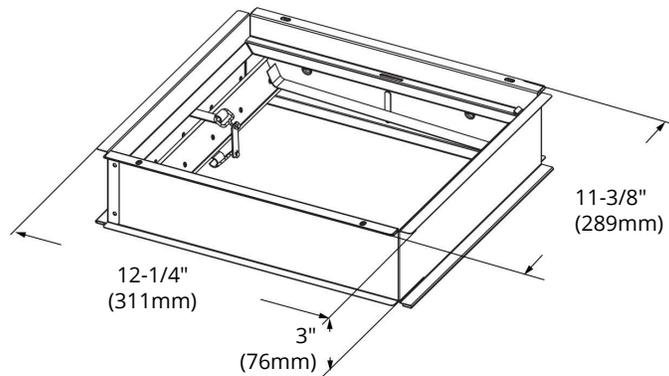

Reference	QTY.	Remarks	Project:
			Location:
			Architect:
			Engineer:
			Contractor:
			Submitted by:
			Date:

ORTECH reserves the right to modify at any time, without notice, any or all of our product's features, designs, components and specifications to meet market changes.