

MODEL Fire damper

CEILING DAMPER SQUARE AND RECTANGULAR

U.L. 555C CLASSIFIED ASSEMBLIES AND ULC S112.2 LISTED

Approved for 1-3 Hour Rated

Description

The fire dampers are metal parts(galvanized) with fabric.

Fire Resistant: Up to 3 hours

Below are some material list submitted to

UL: spring



0.59 in. width, the force of one springs is not less than 4.495 lbs

fusible link

165°F, 0.563 in. width

fabric

0.118 in. thick, 12.484 lbs/ft³, environmental temperature 1000°C

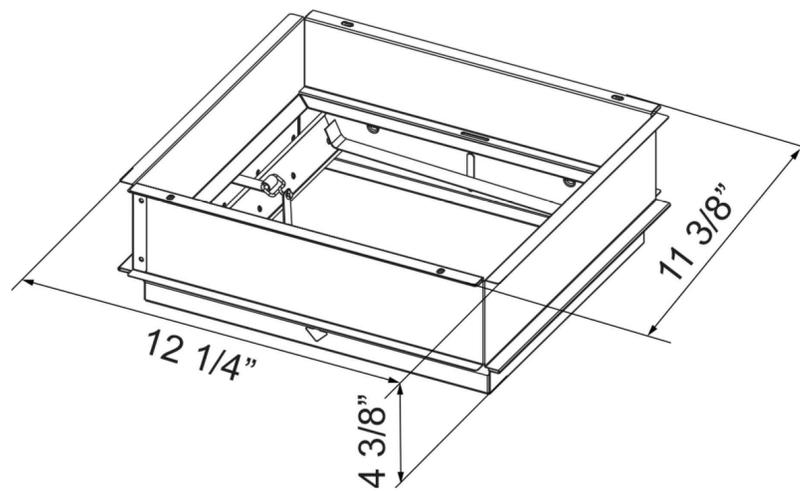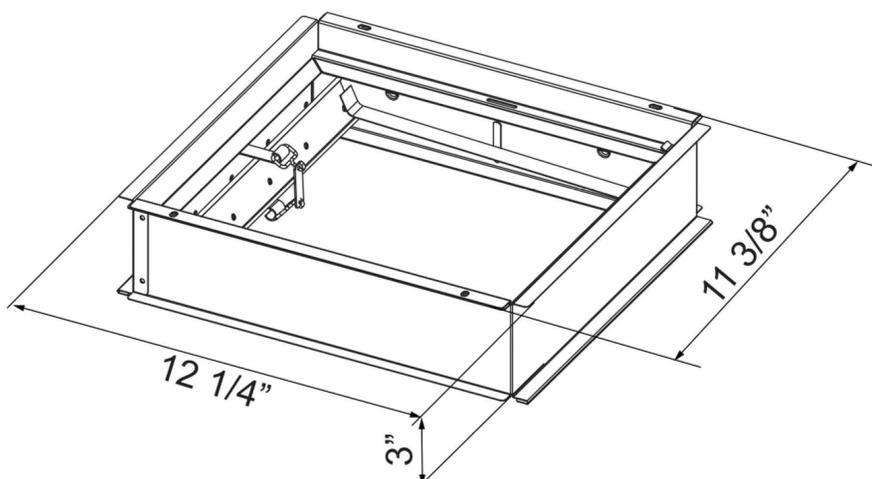

Compatible with:

OD-8005, OD-9005, OD-1109, OD-1209, OD-15011, ODD-110