

MODEL LLF-4FT-40W (Non-linkable)

HIGHLIGHTS




- LED non-linkable Linear Light Fixture in 100-277V AC made up of matte white aluminum body for great heat dissipation
- Photocell diffuser resists breakage and reduces replacement and maintenance costs
- Frosted diffuser gives an evenly distributed light output with no glare
- Over-voltage, over-temperature, short circuit protection provided
- Easy maintenance possible with its replaceable LED strip board
- Surface mounting and suspended mounting possible

SPECIFICATIONS

Model	LLF-4FT-40W
Wattage	40W
Voltage	100-277V AC /50-60Hz
Lumens	4200 lmn (105 lmn per Watt)
Beam Angle	170°
Lifetime	50000 hours
CRI	> 83
Dimmable	No
Rating	Non-IC Rated, Indoor use, for Dry and Damp locations
Grade of Protection	IP 40
Applications	Office / School / Retail Store / Corridor
Colour Temp.	4000K (Natural White)
Operating Temp.	-20°C ~ +40°C
Accessory Included	1m suspended accessory / 1m power cable

DIMENSIONS

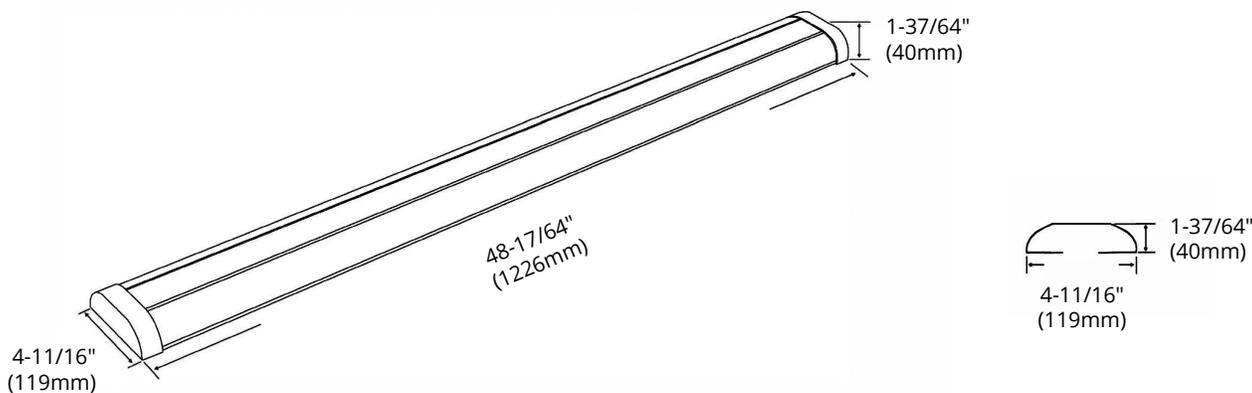

Reference	QTY.	Remarks	Project:
			Location:
			Architect:
			Engineer:
			Contractor:
			Submitted by:
			Date: