

Ceiling Mount Sensor

MODEL MPC-50V




HIGHLIGHTS

- Simple and fast installation
- Controls incandescent, CFL, and LED lighting
- Line voltage PIR (passive infrared) ceiling mount sensor
- Multi-level, 360° fresh lens for superior occupancy detection
- Energy efficient, super bright LED with adjustable time delay
- Case Quantities: 40

SPECIFICATIONS

Model	MPC-50V
Wattage	800W
Input	120-277V AC, 60Hz
Incandescent	120V AC, 60HZ at 800W
Ballast	120V AC at 800VA; 277V AC at 1600VA, 60Hz
Resistive	10A at 120V AC, 60Hz
Motor	1/4HP, 120V AC, 60Hz
Adjustable Light Level	10FC to 150FC
Adjustable Time Delay	15 sec ~ 30 min
Coverage	360°, up to 1200 ft ²
Operating Temp.	0°C ~ +55°C

DIMENSIONS

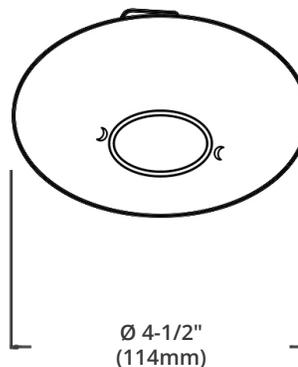

Reference	QTY.	Remarks	Project:
			Location:
			Architect:
			Engineer:
			Contractor:
			Submitted by:
			Date:

ORTECH reserves the right to modify at any time, without notice, any or all of our product's features, designs, components and specifications to meet market changes.