

## MODEL ODD30 - 8010

### Ultra Silent, High Performance, Attractive Design Grille Description

Ventilating fan should be ceiling or wall mounted and capable of exhausting air quietly and efficiently.

It comes with a capacitor start motor which is known for its high efficiency and long lasting reliability.

It comes with a low speed feature that is designed to run continuously at 30CFM,24 hour a day,to meet the local building codes.

### Housing

Made of rugged 26 GA galvanized steel

Detachable 4 inch polymeric collar which includes a light weight built in back draft damper.

Housing size: 9"x9"x5 3/4"

### Motor/Blower

Totally enclosed brushless DC motor technology.

Power rating should be 120 volts and 60 Hz

Fan shall be ETL and cETL listed for tub/shower enclosure when used with a GFCI branch circuit.

Motor comes with a built in overload disconnect for safety and longer motor life.

operates at lower RPM s to give you quieter operation.

### Grille

The grille is low profile that has elegance and still able to maintain its simplicity.

Made of a rugged polymeric resin that's known for its long life durability.

Comes with torsion spring clips that helps mount grille evenly.

### Typical specification

Ceiling ventilator shall have corrosion resistance galvanized steel.

It shall be ducted to a roof vent or wall cap using 4 inch round pipe.

Ventilation Fan shall be of the ceiling or wall mount.

Includes a detachable non-metallic collar with build-in back draft damer.

Power consumption shall be no greater than 9 watts.

The motor shall be totally enclosed with the brushless DC motor engineered to run continuously



**Options**  
Flourescent light  
Humidistat



**Comes with protective cardboard cover**

Warranty is voided if the cardboard is removed anytime during construction.



Reference	QTY.	Remarks	Project:
			Location:
			Architect:
			Engineer:
			Contractor:
			Submitted by:
			Date:

## CERTIFICATIONS



### MODEL ODD30-8010

Model No.	ODD30-8010	
Static Pressure in inches w.g.	0.1	0.25
Air Volume (CFM)- High Speed	80	60
Air Volume (CFM)- Low Speed	30	23
Noise (sones)	1.0	N/A
Fan Watts	9W	N/A
Duct Diameter	4"	4"
Power Rating (V/Hz)	120/60	120/60

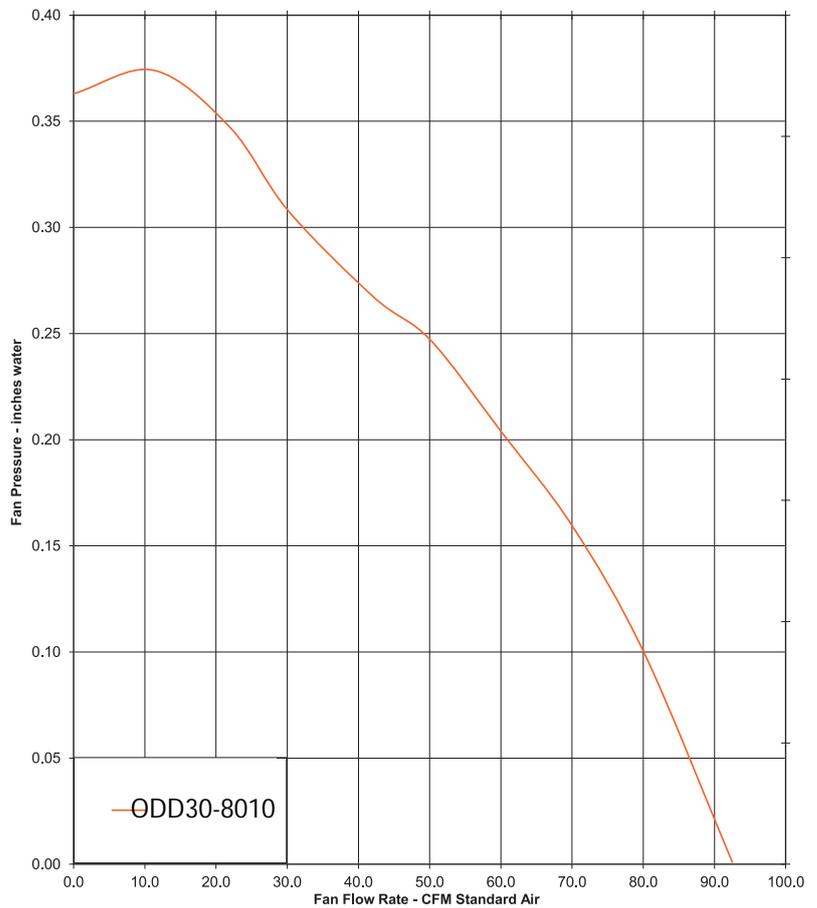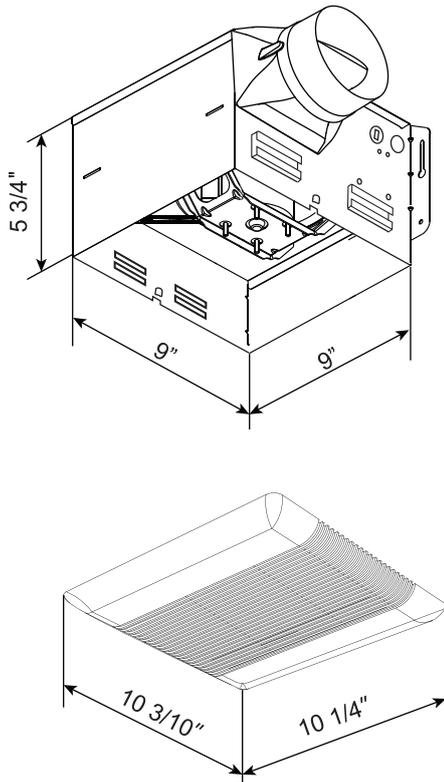

ORTECH INDUSTRIES INC.

13376 Comber Way  
 SURREY, BC V3W 8V4  
 CANADA  
 Phone: 1-888-543-6473

**ORTECH**  
[www.ortechindustries.com](http://www.ortechindustries.com)

CERTIFICATIONS

