

# LED Emergency Lights

## MODEL OE-212BP

**ORTECH**

Product Specification Sheet





### HIGHLIGHTS

- LED Dual Head Emergency Light with battery pack backup and high efficiency LED remote heads
- Has 2 pieces 2W ultra bright LED lamp heads for emergency mode and 120V/277V/347V AC triple voltage operation
- Universal mounting pattern and key hole slots are stamped on the back and conduit knockouts on the sides of each unit
- Comes with built-in 6V 7Ah Lead-Acid battery for minimum 2 hours emergency operation
- Made of steel housing with lightweight thermal plastic head in matching colour, and has UL94V-0 flame rating
- Full recharge time is maximum 24 hours and is suitable for +10°C to +40°C indoor damp locations
- Provides overcharge & over-discharge protection
- Includes test switch and charge indicator
- Fast and Easy installation in minutes
- Max Remote Load: 36W at 30mins battery backup time | 12W at 90mins battery backup time | 10W at 120mins battery backup time
- Case Quantities: 2



### SPECIFICATIONS

Model	OE-212BP
Total Fixture Wattage	4.5W
Voltage	120V AC or 277V AC or 347V AC /60Hz
AC Charging Current	100mA AC Max.
DC Charging Voltage	5.25-7.5V DC
DC Charging Current	560mA DC Max.
Lamp Head Lumens & Wattage (per head)	2W & 130lm/head
Material	Steel housing   Lightweight thermal plastic heads
Battery	6V 7Ah   Lead-Acid Battery
Emergency Duration Time	≥ 120 min
Discharge Current	0.67-6.67A
Charging Time	≥ 120 min
Colour Temperature	6200K
Operating Temperature	+10°C ~ +40°C
Warranty	5 years
Max Remote Load	36W at 30mins battery backup time 12W at 90mins battery backup time 10W at 120mins battery backup time
Case Quantities	2

DIMENSIONS & TESTING REPORT

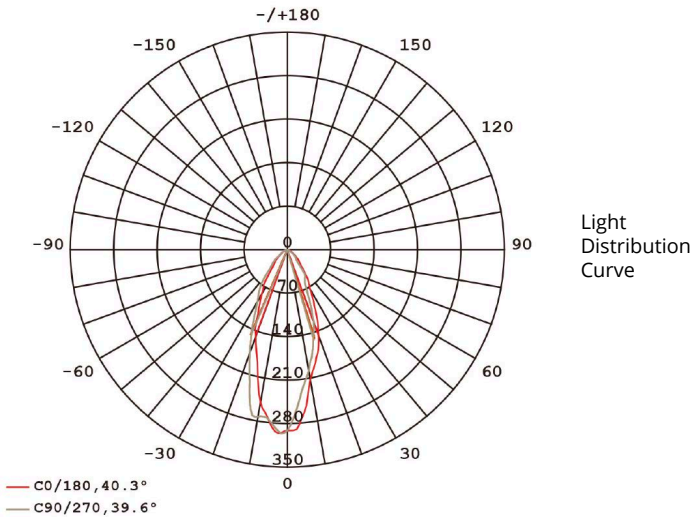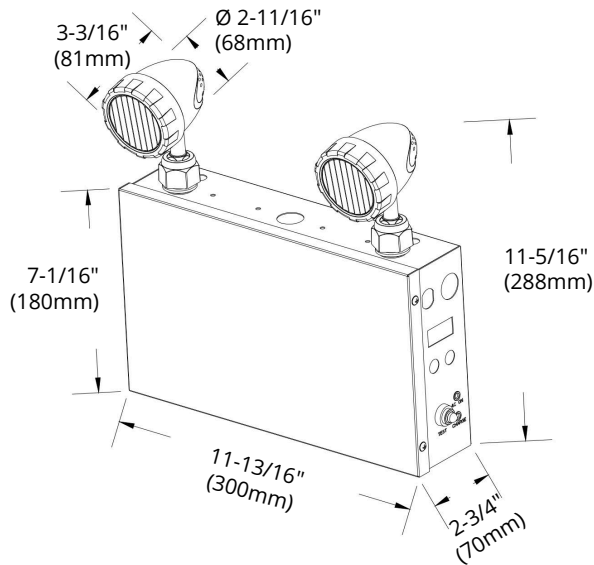

SPECTRA

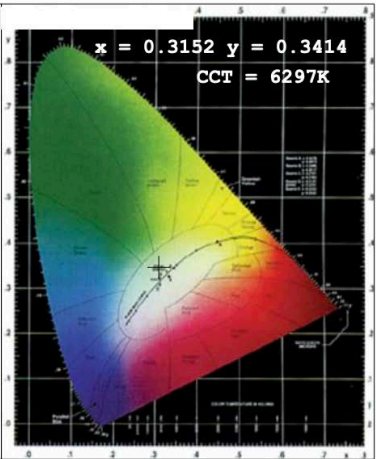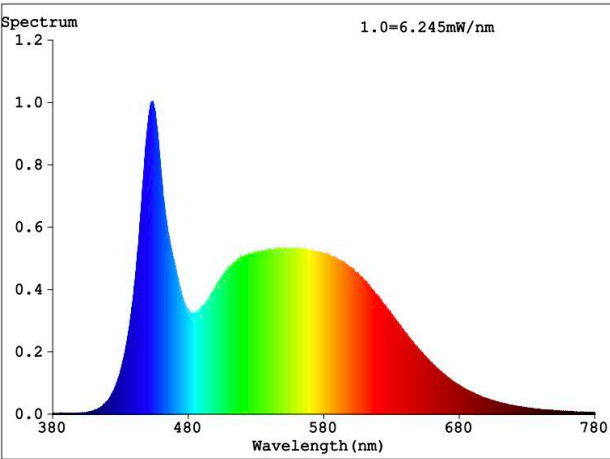

ORTECH reserves the right to modify at any time, without notice, any or all of our product's features, designs, components and specifications to meet market changes.

Colourimetric Parameters

Chromaticity Coordinate:  $x = 0.3152$   $y = 0.3414$  /  $u' = 0.1950$   $v' = 0.4752$   
CCT= 6297K (Duv=0.0082) Dominant WL:  $\lambda_d=497.5\text{nm}$  Purity=5.7%  
Peak WL:  $\lambda_p=453.2\text{nm}$  FWHM: =26.7nm Ratio: R=13.3% G=80.7% B=6.0%  
Render Index: Ra = 83.6 CRI=76.4 AvgR=76.3  
R1 =81 R2 =89 R3 =95 R4 =81 R5 =82 R6 =86 R7 =88  
R8 =68 R9 =4 R10=75 R11=80 R12=60 R13=83 R14=97 R15=75

Photometric & Radiometric Parameters

Flux = 218.7 lm Eff. : 0.00 lm/W Fe = 695.6mW

Electrical parameters

V = 0 V I = 0 A P = 0 W PF = 0

Reference	QTY.	Remarks	Project:
			Location:
			Architect:
			Engineer:
			Contractor:
			Submitted by:
			Date: