

LED Exit Signs

MODEL OE-316

ORTECH

Product Specification Sheet




HIGHLIGHTS

- LED Running Man Combo Exit Sign made of UV stabilized plastic with 120 minutes backup time and adjustable heads
- LED Exit Signs with innovative, snap-together design, which allow for fast and easy installation
- Injection-molded thermoplastic ABS housing with Universal mounting (wall, side and ceiling)
- Has UL-94V-0 flame rating and is fire-retardant
- Includes Test button and charge indicator light
- Provides Overcharge & over-discharge protection
- Case Quantities: 6

SPECIFICATIONS

Model	OE-316
Total Fixture Wattage	4.5W
Voltage	120V AC or 347V AC /60Hz
Lamp Head Lumens & Wattage (per head)	AC: 1w/head, 90 lumens (total) DC: 170 lumens (total)
Wattage and lumens of the pictogram part	AC: 4.5w and 23 lumens DC: 130 lumens
Remote head CCT	AC: 6100K DC: 6300K
Pictogram CCT	AC: 7000K DC: 6500K
Material	Injection molded thermoplastic ABS housing
Battery	3.6V 1800mAh
Emergency Duration Time	≥ 120 min
Conversion Time	< 0.2 seconds
Insulation	II, Range: 80m ²
Operating Temperature	0°C ~ +40°C
Warranty	5 Years
Case Quantities	6

DIMENSIONS

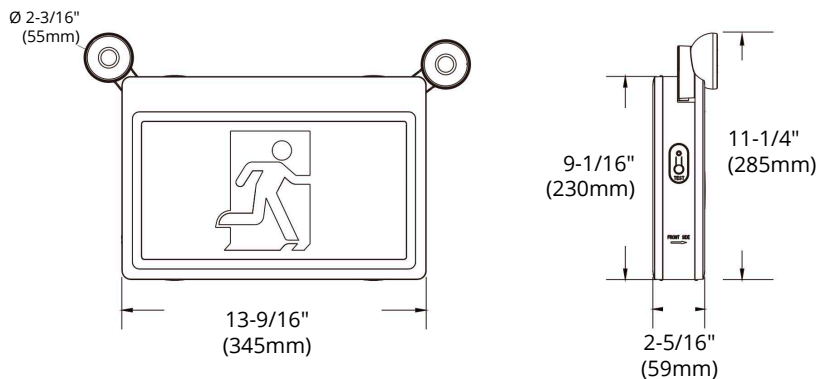

ORTECH reserves the right to modify at any time, without notice, any or all of our product's features, designs, components and specifications to meet market changes.



* Included in packaging

Reference	QTY.	Remarks	Project:
			Location:
			Architect:
			Engineer:
			Contractor:
			Submitted by:
			Date: