

MODEL OE-DC126




HIGHLIGHTS

- LED Pictogram Exit Sign that does not require any battery for operation
- LED Exit Signs with innovative, snap-together design, which allow for fast and easy installation
- Injection-molded thermoplastic ABS housing with Universal mounting (wall, side and ceiling)
- Has UL-94V-0 flame rating and is fire-retardant

SPECIFICATIONS

Model	OE-DC126
Wattage	Super Bright LED 1W
Voltage	120V AC or 347V AC / 6-24V DC
Material	Injection molded thermoplastic ABS housing
Battery	None
Emergency Duration Time	None
Conversion Time	≤ 0.2 seconds
Grade of Protection	IP 20
Insulation	II, Range: N/A, unrequired
Operating Temp.	0°C ~ +40°C

DIMENSIONS

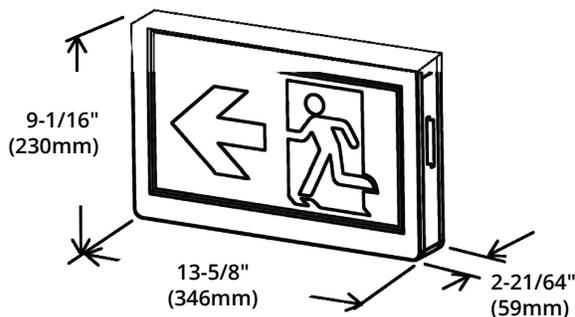

ORTECH reserves the right to modify at any time, without notice, any or all of our product's features, designs, components and specifications to meet market changes.



* Included in packaging

Reference	QTY.	Remarks	Project:
			Location:
			Architect:
			Engineer:
			Contractor:
			Submitted by:
			Date: