

# LED Slim Lights

## MODEL OLT2-RG412-WH



### HIGHLIGHTS

- 4" commercial grade LED slim regress open plenum rated, architectural design light in 12W for tight ceiling spaces
- Depth is 2-1/8", and for the best possible layout depth flexibility, it should be installed right under joists
- Can be installed directly into drywall and IC rated for direct contact with insulation; no housing required
- Easy and Fast installation — install directly into ceiling with clips
- Class 2 transformer in junction box is included
- Fits in tight ceiling spaces


### MOUNTING

- Cut hole in ceiling and snap fixture in Opening with attached spring clips
- Ceiling clearance required: 2-5/8"


### SPECIFICATIONS

Model	<b>OLT2-RG412-WH</b>
Wattage	12W
Voltage	120V AC
Lumens	700 lmn
Beam Angle	92°
Lifetime	50000 hours
Cutout	ø 4" to 4-1/2" (102 mm to 115 mm)
CRI	80
Dimmable	Yes
Rating	IC Rated / Indoor use / for Damp locations
Grade of Protection	IP 42
Air Tight	Yes
Applications	Drop ceilings / Office / Attics / Hallways / Bathrooms / Kitchens / Basements
Colour Temp.	3000K (Warm White)
Operating Temp.	-20°C ~ +40°C
Warranty	5 years

DIMENSIONS

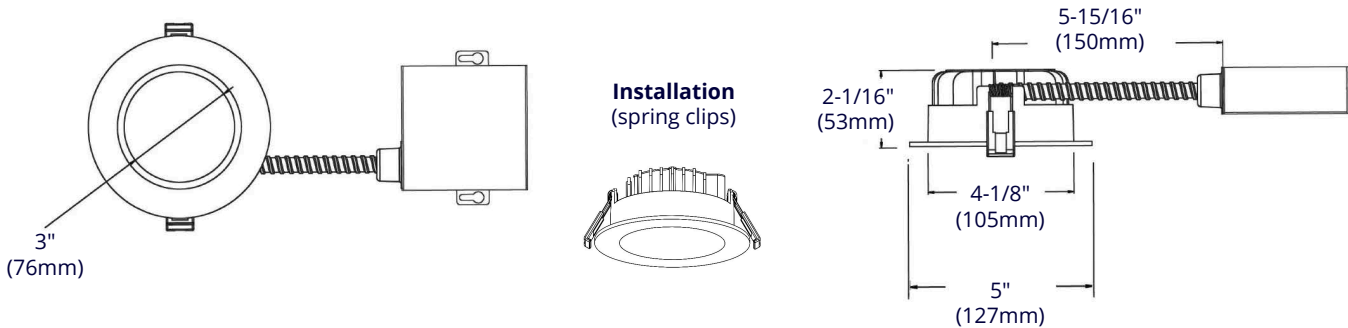

EXPANSION FUNCTION

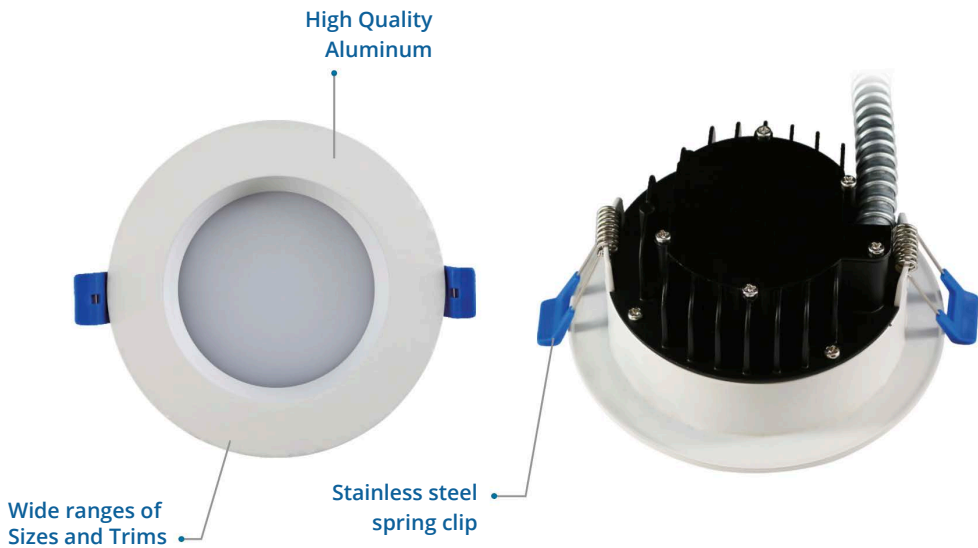

Features & Benefits:

- Saves time for contractors and solves limited space
- Constraints with great results
- Open plenum rated — suitable for commercial installations

Trims & Accessories  
(sold separately)



DMD-ELV

Single pole 3-way dimmers

Reference	QTY.	Remarks	Project:
			Location:
			Architect:
			Engineer:
			Contractor:
			Submitted by:
			Date:

ORTECH reserves the right to modify at any time, without notice, any or all of our product's features, designs, components and specifications to meet market changes.