

LED Flush Mounts

MODEL 2400

ORTECH

Product Specification Sheet



HIGHLIGHTS

- Comes with built-in driver
- High lumens — 100 lm/watt
- Surface mount / pendant installation possible
- 16" round LED Flush Mount that can be installed in tight space
- Ensures uniform light distribution without black dots or shadow

SPECIFICATIONS

Model	2400
Wattage	30W
Voltage	120V AC
Lumens	3000 lm
Beam Angle	120°
Lifetime	50000 hours
CRI	80
Dimmable	Yes
Rating	IC Rated / Indoor use / for Damp location
Grade of Protection	IP 20
Applications	Corridors / Lobbies / Kitchens / Balconies / Bathrooms / Bedrooms
Colour Temp.	3000K (Warm White) / 5000K (Cool White)
Operating Temp.	-20°C ~ +40°C
Warranty	5 years

Available in
following colours




White
(WH)



Black
(BK)

MODEL 2400

DIMENSIONS & EXPANSION FUNCTION

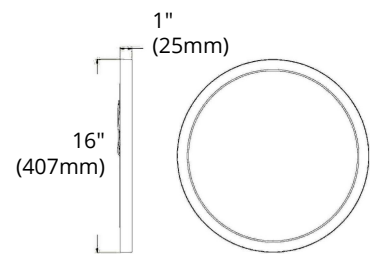


Surface Mount Installation



- Stable design for the whole structure
- SMT (surface-mount) technology, which ensures accurate positions for LED on FPCB (flexible printed circuit board)
- PMMA LGP (poly methyl methacrylate light guided panel) and diffuser plate

TESTING REPORT & EXPLOSIVE VIEW

Light Distribution Curve

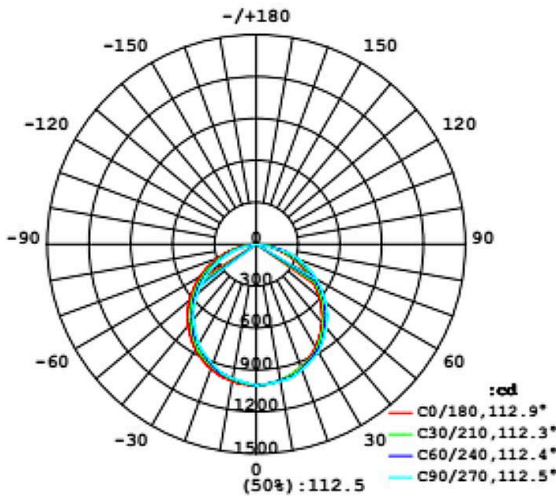

Reference	QTY.	Remarks	Project:
			Location:
			Architect:
			Engineer:
			Contractor:
			Submitted by:
			Date:

ORTECH reserves the right to modify at any time, without notice, any or all of our product's features, designs, components and specifications to meet market changes.