

2" SLIM LIGHTS

SLIM-RG2-5CCT

(NOT suitable for direct contact with water unless installed with shower trim)



HIGHLIGHTS

2" Regress Downlight Module Changeable Trim With Selectable CCT

- Class 2 transformer in junction box is included
- No housing required - Type IC, air tight & damp location rated
- Easy & fast installation - install directly into ceiling with clips
- Aluminum die-cast construction with beam spread option 38°
- Not suitable for direct contact with water unless installed with shower trim

8W

120V AC

600 LMN


80 CRI

CERTIFICATIONS



COLOUR TEMPERATURE

2700K / 3000K / 3500K / 4000K / 5000K (Selectable)




SPECIFICATIONS

MODEL	SLIM-RG2-5CCT
Wattage	8W
Voltage	120V AC, 60Hz
Lumens	600 lmn
Beam Angle	38°
Lifetime	50,000 hours
Dimmable	Yes (TRIAC dimming)
CRI	80Ra
Rating	IC rated/Indoor use/ Wet Location
Grade of Protection	IP44
Cutout	Ø2-7/8" (72mm)
Operating Temperature	-20°C ~ +40°C
Case Quantities	18

ELEVATE YOUR LIGHTING GAME

5 YEAR WARRANTY

DIMENSIONS

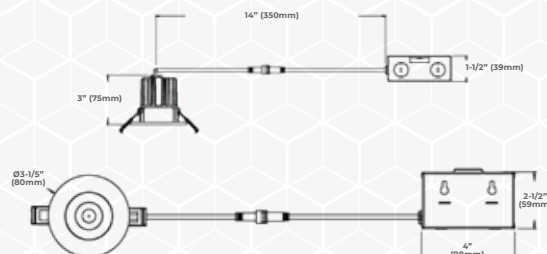

ORTECH reserves the right to modify at any time, without notice, any or all of our product's features, designs, components and specifications to meet market changes.



2" SLIM LIGHTS


SLIM-RG2-5CCT

INCLUDED IN BOX

- 1" Regress Downlight with Remote Driver



CUT HOLE SIZE

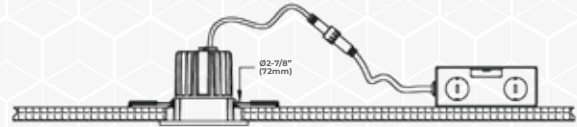

Cut Hole Size
Ø2-7/8" (72mm)

INTERCHANGEABLE REFLECTORS (SOLD SEPARATELY)



SLIM-RG2-RF-ALCH
ALZEK CHROME



SLIM-RG2-RF-ALHZ
ALZEK HAZE



SLIM-RG2-RF-BFSN
SATIN NICKEL BAFFLE



SLIM-RG2-RF-BFWH
WHITE BAFFLE



SLIM-RG2-RF-BFBK
BLACK BAFFLE

INTERCHANGEABLE RINGS (SOLD SEPARATELY)



SLIM-RG2-RING-BK
REGULAR BLACK RING



SLIM-RG2-RING-SN
REGULAR SATIN NICKEL RING



SLIM-RG2-RING-WH
REGULAR WHITE RING



SLIM-RG2-RINGOV-BK
OVAL RING BLACK



SLIM-RG2-RINGOV-WH
OVAL RING WHITE



SLIM-RG2-RINGS-BK
SMALL ROUND BLACK RING



SLIM-RG2-RINGS-WH
SMALL ROUND WHITE RING



SLIM-RG2-RINGSH-BK
SHOWER RING BLACK



SLIM-RG2-RINGSH-WH
SHOWER RING WHITE



SLIM-RG2-RINGSP-BK
SCOOP RING BLACK



SLIM-RG2-RINGSP-WH
SCOOP RING WHITE

ACCESSORIES (SOLD SEPARATELY)



CORD-24 | 60 | 120 | 240
Extension Cord

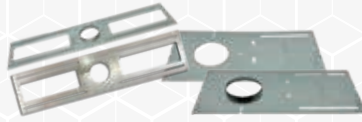


PLATE13-2 | PLATE13-2-L | PLATE26-2 | PLATE26-2-L
Construction plate made up of galvanized steel
for recessed lighting



PLATE2-HB
Galvanized steel mounting plate
with hanger bars



DMD-ELV
Single pole 3 way dimmer

REFERENCE	QUANTITY	REMARKS	PROJECT DETAILS
			Project:
			Location:
			Architect:
			Engineer:
			Contractor:
			Submitted By:
			Date:

ORTECH reserves the right to modify at any time, without notice, any or all of our product's features, designs, components and specifications to meet market changes.

