

LED SLIM LIGHTS

SLIM4-5CCT


HIGHLIGHTS

4" Ultra Slim LED Downlight With Adjustable CCT

- Edge-lit Technology, No Glare Or Dark Spots, Instant-on
- No Existing Recessed Housing Or Junction Box Required
- Dimming: Triac Down To 10%
- I.C. Rated For Direct Contact With Insulation (indoor only)
- Suitable For Wet Location (indoor only)
- Rated For A Long Life - Over 50,000 Hours
- FT6 cable (plenum rated)
- 5-color Field Selectable CCT- 2700K, 3000K, 3500K, 4000K, 5000K



DIMENSIONS

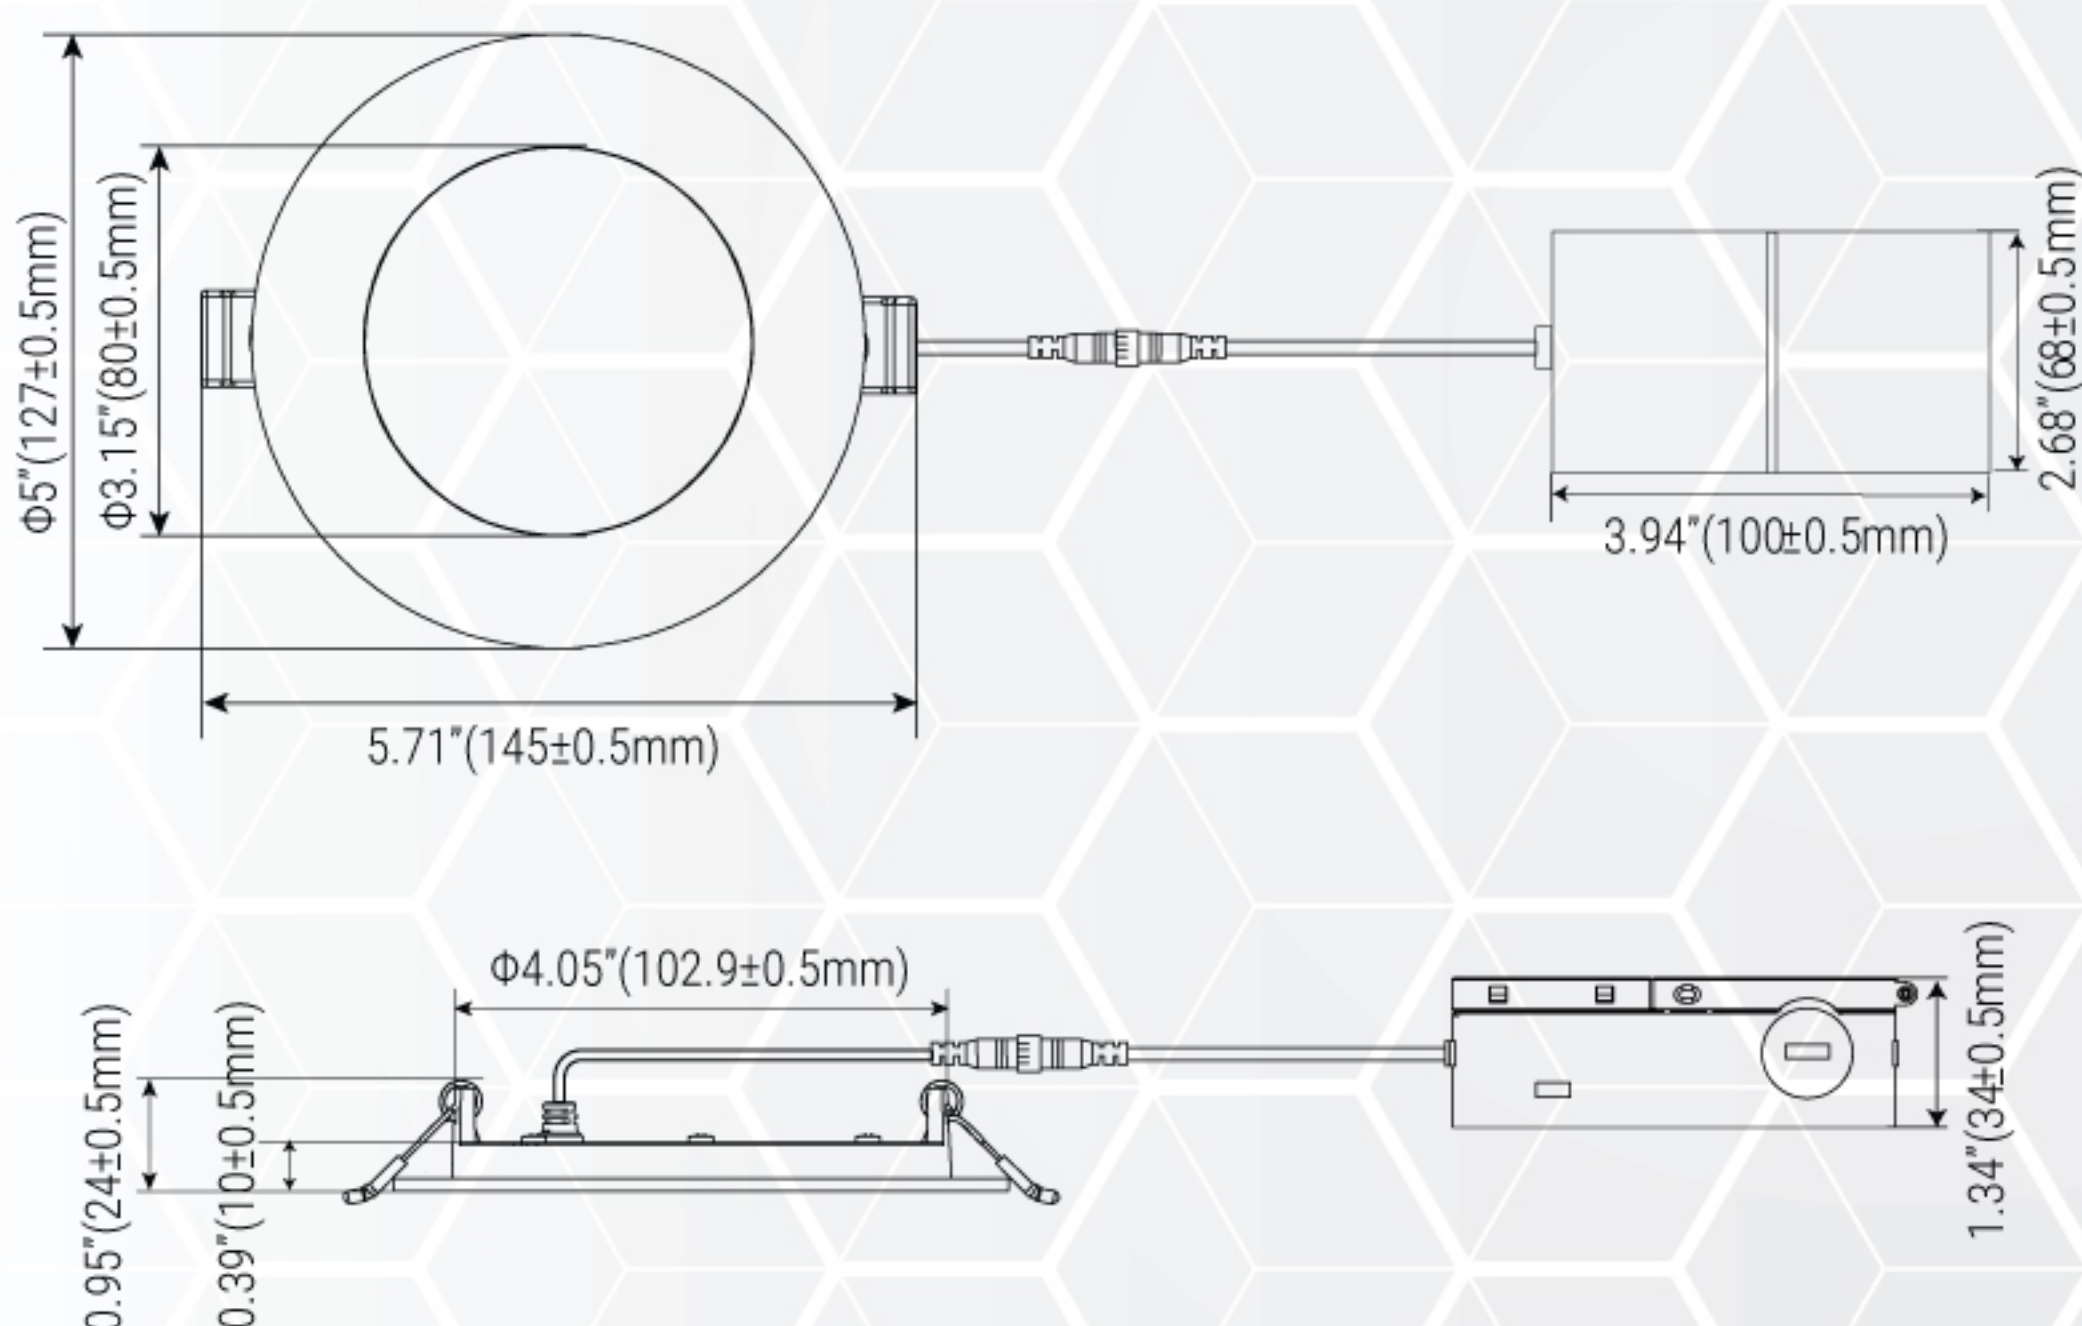

SPECIFICATIONS

Model	SLIM4-5CCT
Wattage	10W
Voltage	AC120V, 60Hz
Lumens	934 lmn
Beam Angle	120°
Lifetime Warranty	50000 hours 5 years
Air Tight	Yes
Rating	IC rated Indoor location
Grade of Protection	Suitable For Wet Locations (indoor only)
CRI	90+
Colour Temp.	2700K / 3000K / 3500K / 4000K / 5000K
Dimming	Triac Dimming
Operating Temp.	-20°C ~ +45°C
Case Quantities	24


LED SLIM LIGHTS

SLIM4-5CCT

INSTALLATION

- Suitable for most new constructions.
- Install J-Box in ceiling beam, and insert light right into drywall opening

Cut Hole Size
Ø4-1/4" (108mm)

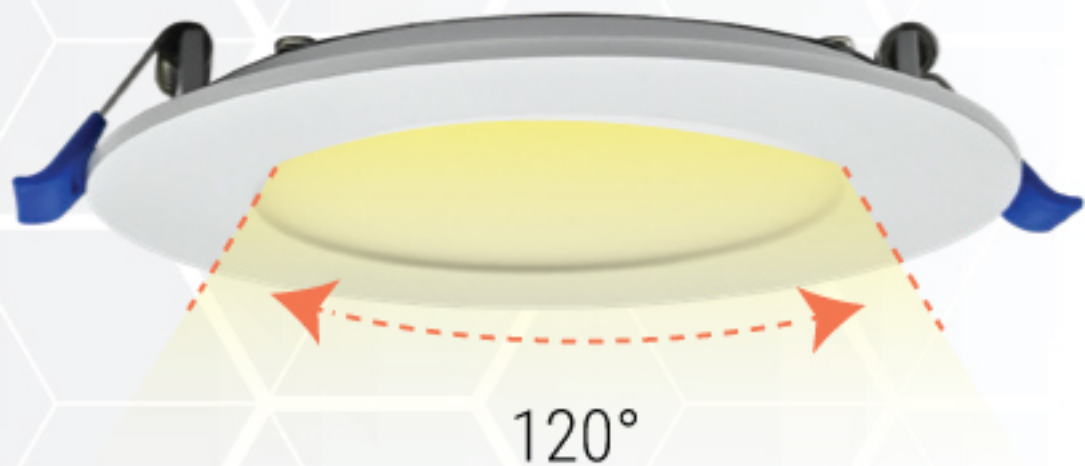

DECORATIVE TRIMS



SLIM4-RINGBK



SLIM4-RINGSN



SLIM4-RINGCH



SLIM4-RINGVB



SLIM4-RINGCBK



SLIM4-RINGCP



SLIM4-RINGBR

ACCESSORIES (SOLD SEPARATELY)

MOUNTING PLATE



**PLATE13-4A, PLATE13-4A-L,
PLATE26-4A, PLATE26-4A-L**
4" New Construction Plate made
up of galvanized steel for recessed
lighting

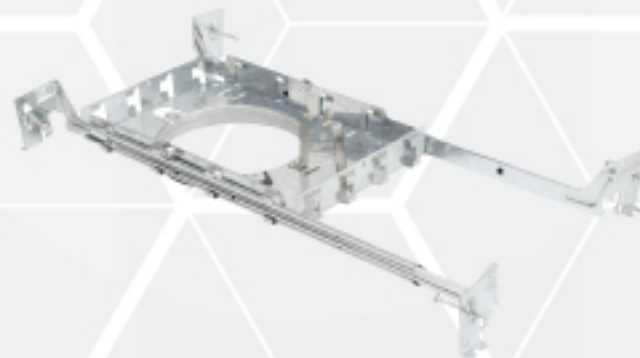


PLATE4A-HB
Galvanized steel Mounting Plate with
hanger bars for ORTECH 4" LED
lights

FLEXIBLE CONNECTOR



CORD-B24/B120
Flexible Connector
2FT/10FT



Reference	QTY.	Remarks	Project:
			Location:
			Architect:
			Engineer:
			Contractor:
			Submitted by:
			Date:

ORTECH reserves the right to modify at any time, without notice, any or all of our product's features, designs, components and specifications to meet market changes.

