

LED Slim Lights

MODEL SLIM4DGR

ORTECH

Product Specification Sheet



HIGHLIGHTS

- Commercial or Residential grade LED Regress Gimbal Lights with anti-glare design and tilting gimbal light source for directional lighting
- Ideal for sloped ceilings, wall washing, highlight artwork, task or general lighting, etc.
- Offers a sleek, directional, and quiet alternative to further elevate your space
- Engineered to maximize heat dissipation and has optical lens
- Compatible with industry standard TRIAC / ELV dimmers
- Easy and Fast Installation — saves on labour
- IC rated for direct contact with insulation, no housing required
- Depth is 1-7/8", and for the best possible Layout Depth Flexibility, it should be installed right under joists
- Made of durable aluminum body and adjustable gimbal with 30° tilt, 360° rotation
- Utilizes LED technology that fits anywhere you need general light source

MOUNTING

- Cut hole in ceiling and snap fixture in Opening with attached spring clips
- Ceiling clearance required: 2-1/2"


SPECIFICATIONS

Model	SLIM4DGR
Wattage	12W
Voltage	120V
Lumens	1000 lmn
Beam Angle	40°
Lifetime	50000 hours
Cutout	Ø 4-21/64" (110 mm)
CRI	80
Dimmable	Yes
Rating	IC Rated, Indoor use only, for Damp location
Grade of Protection	IP 20
Air Tight	Yes
Applications	Recessed ceiling / Overhanging eaves, etc.
Colour Temp.	3000K (Warm White) / 5000K (Cool White)
Operating Temp.	-20°C ~ +40°C

LED Slim Lights

MODEL SLIM4DGR

DIMENSIONS

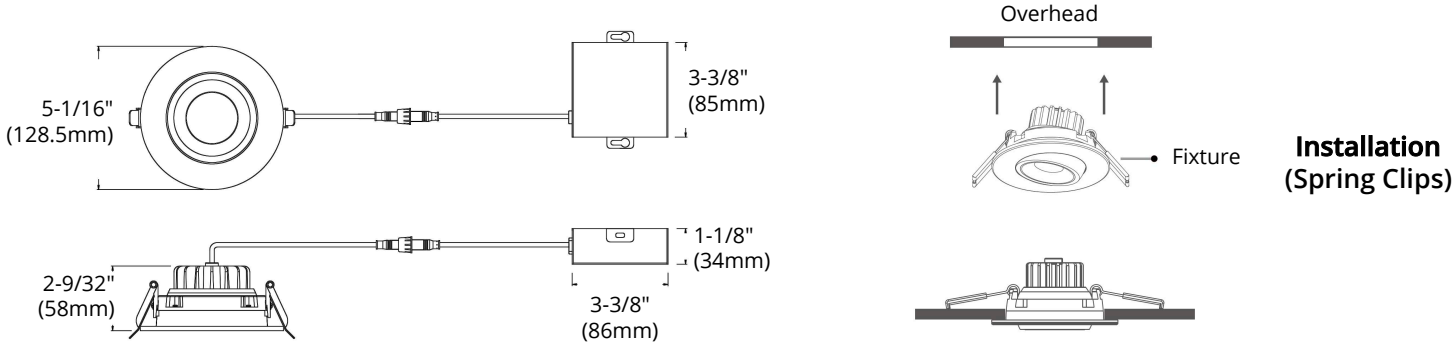

PACKAGING



Available in following colours



Compatible Dimmers & Mounting Plates (sold separately)



DMD-ELV
Single pole
3-way dimmers




PLATE4-HB
Mounting Plates for
ORTECH 4" Slim Lights



PLATE26-4
New Construction Plates
for ORTECH 4" Slim Lights

Reference	QTY.	Remarks	Project:
			Location:
			Architect:
			Engineer:
			Contractor:
			Submitted by:
			Date: