

LED Slim Lights

MODEL SLIM4RG

ORTECH

Product Specification Sheet



HIGHLIGHTS

- 4" Residential grade LED Slim regress downlight modules with interchangeable trims and anti-glare design
- Ideal for sloped ceilings, wall washing, highlight artwork, task or general lighting, etc.
- Compatible with industry standard TRIAC / ELV dimmers
- Easy and Fast installation — saves on labour
- IC rated for direct contact with insulation, no housing required
- Depth is 1-7/8", and for the best possible Layout Depth Flexibility, it should be installed right under joists
- Made of durable aluminum and LED technology that fits anywhere you need general light source

MOUNTING

- Cut hole in ceiling and snap fixture in Opening with attached spring clips
- Ceiling clearance required: 2-1/2"

SPECIFICATIONS

Model	SLIM4RG
Wattage	15W
Voltage	120V
Lumens	1100 lmn
Beam Angle	40°
Lifetime	50000 hours
Cutout	Ø 3-47/64" (95 mm)
CRI	80
Dimmable	Yes
Rating	IC Rated, Indoor use only, for Damp location
Grade of Protection	IP 20
Air Tight	Yes
Applications	Recessed ceiling / Overhanging eaves, etc.
Colour Temp.	3000K (Warm White) / 5000K (Cool White)
Operating Temp.	-20°C ~ +40°C


LED Slim Lights

ORTECH


Product Specification Sheet

MODEL SLIM4RG


DIMENSIONS



Module

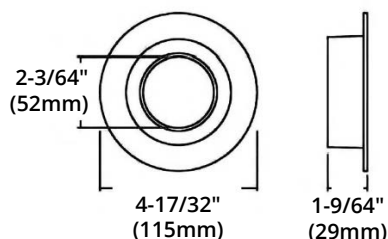

4" Trim

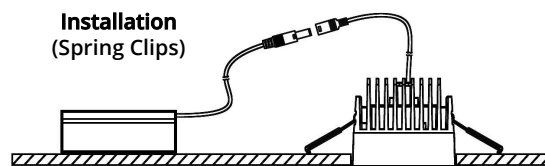

Installation
(Spring Clips)

Cutout:
Ø 3-47/64" (95mm)

PACKAGING



SLIM4RG



DRIVER

in 1 Packaging

Trims
(sold separately)



SLIM4RG-TRM-SN
(Satin Nickel)



SLIM4RG-TRM-WH
(White)



SLIM4RG-TRM-BK
(Black)

**Compatible Dimmers
& Mounting Plates**
(sold separately)



DMD-ELV

Single pole
3-way dimmers




PLATE4-HB

Mounting Plates for
ORTECH 4" Slim Lights



PLATE26-4

New Construction Plates
for ORTECH 4" Slim Lights

Reference	QTY.	Remarks	Project:
			Location:
			Architect:
			Engineer:
			Contractor:
			Submitted by:
			Date: