

LED UFO High Bays

MODEL UFO-150-3CCT+W | UFO-240-3CCT+W



HIGHLIGHTS


- Watts and CCT Selectable UFO High Bay
- Simple and stylish appearance
 - Excellent heat dissipation
 - DLC 5.1 Premium with high luminous efficacy and low UGR
 - PnP sensor option
 - Round EM driver for fast installation
 - Complete selection of accessories available
 - 3CCT (3500K-4000K-5000K)
 - It is made of PC and the lighting angle is 110°
 - Mounting options: hook/chain (included in packaging)

SPECIFICATIONS


Model	UFO-150-3CCT+W		UFO-240-3CCT+W
Wattage	100W/125W/150W		150W/200W/240W
Voltage	AC 120-347V		
Beam Angle	110°		
Lifetime	≥50000 hours		
Lighting Efficiency	150LM/W		
CRI	Ra>80		
Location	Wet Location		
Colour Temp.	3500K 4000K 5000K		
Lumens	15,000lmn 18,750lmn 22,500lmn		22,500lmn 30,000lmn 36,000lmn
Operating Temp.	-40°C~45°C		
Grade of Protection	IP 65 Ik 08		
Dimmable	Yes(only 0-10v dimming available)		
Warranty	5 years		
Case Quantities	1		

DIMENSIONS

UFO-150-3CCT+W

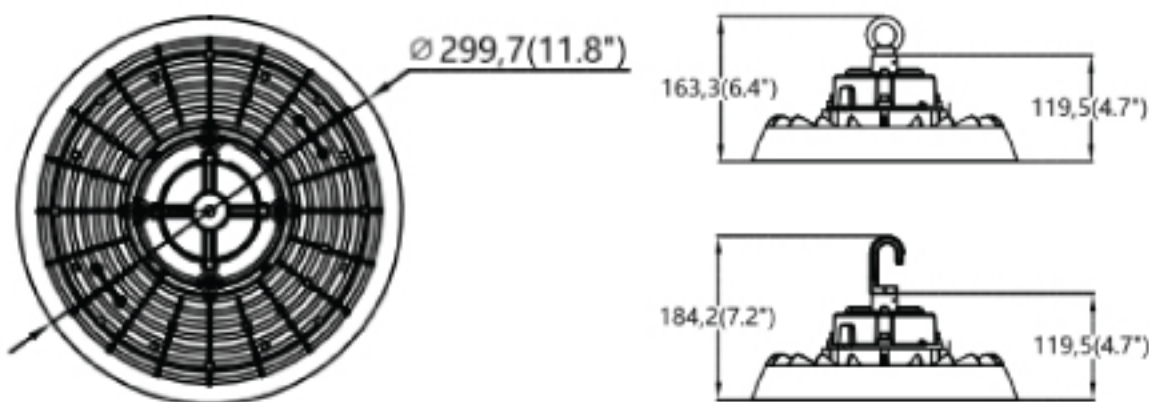


UFO-240-3CCT+W

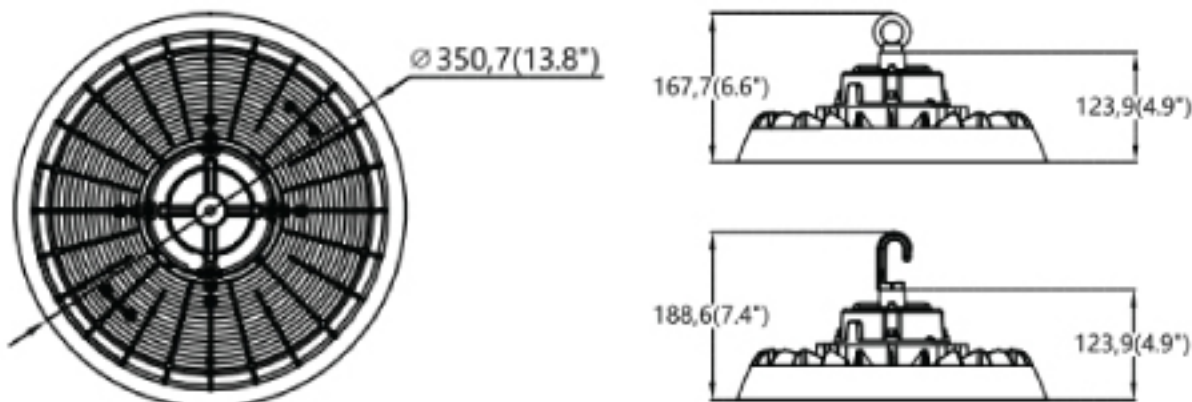


WATTS & CCT SELECTABLE


1.Remove the rubber pad from the drive

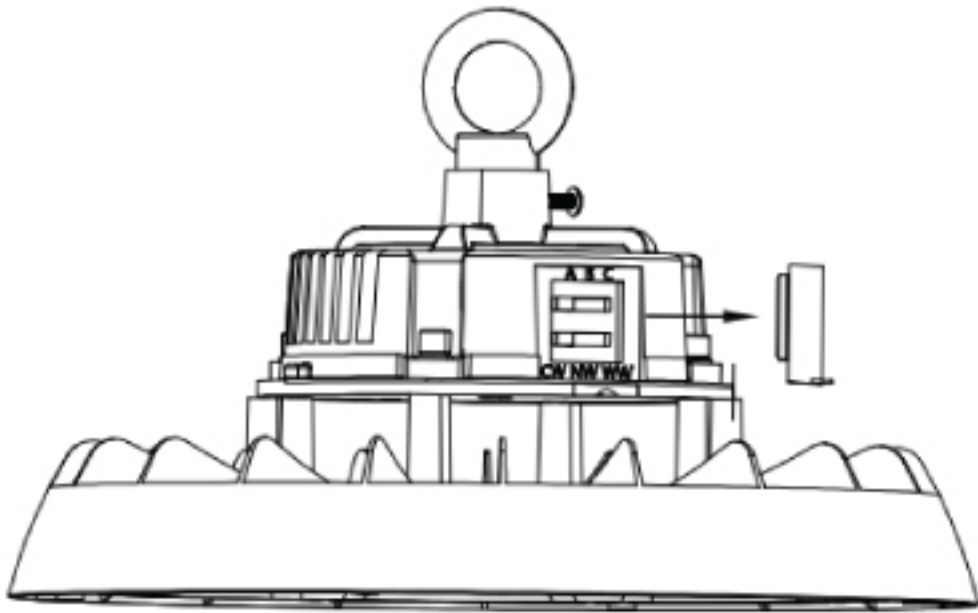

2.Use the slide switch to select wattage & CCT

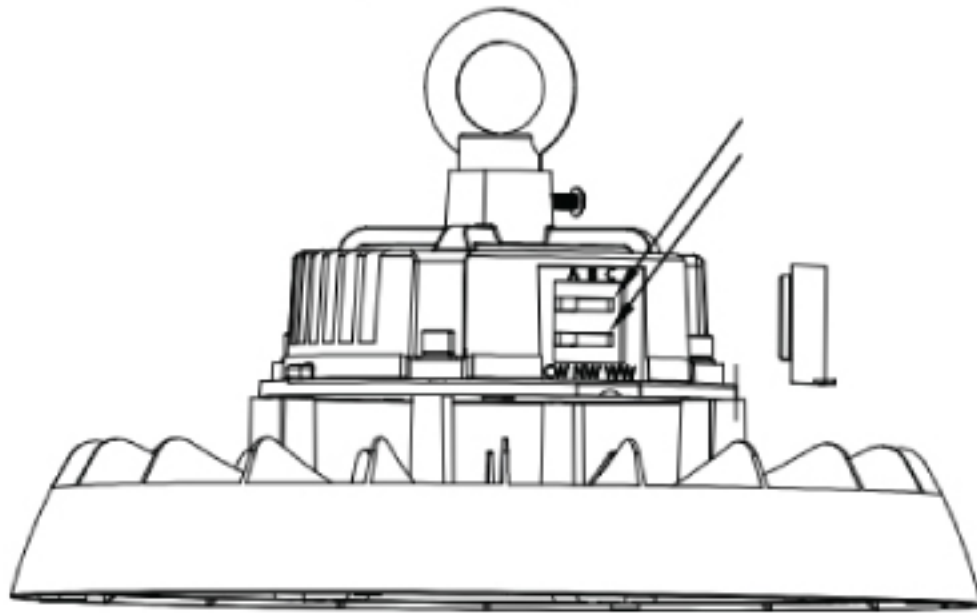


3.Attach the rubber pad to the drive

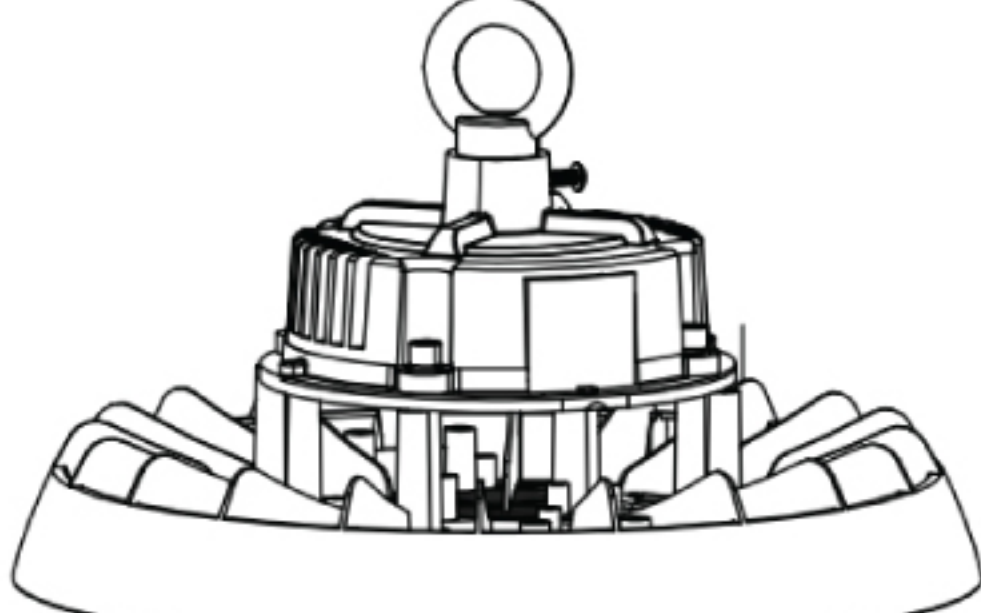


INSTALLATION

1.Hook type:


1.Tighten the hook clockwise

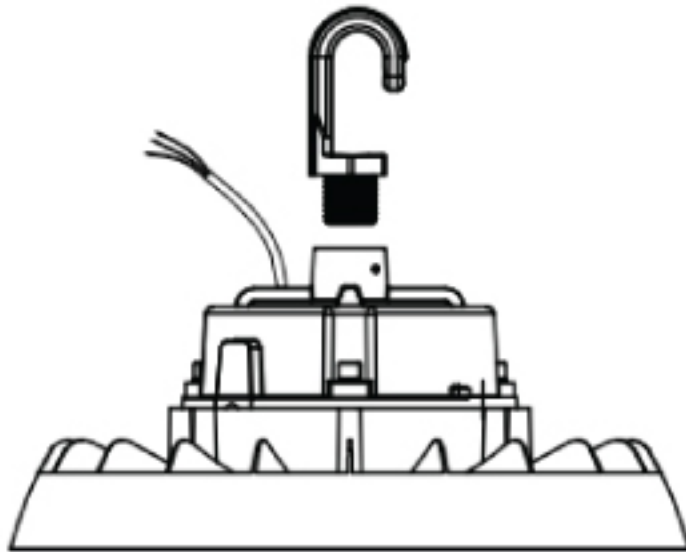


2.Tighten the screw

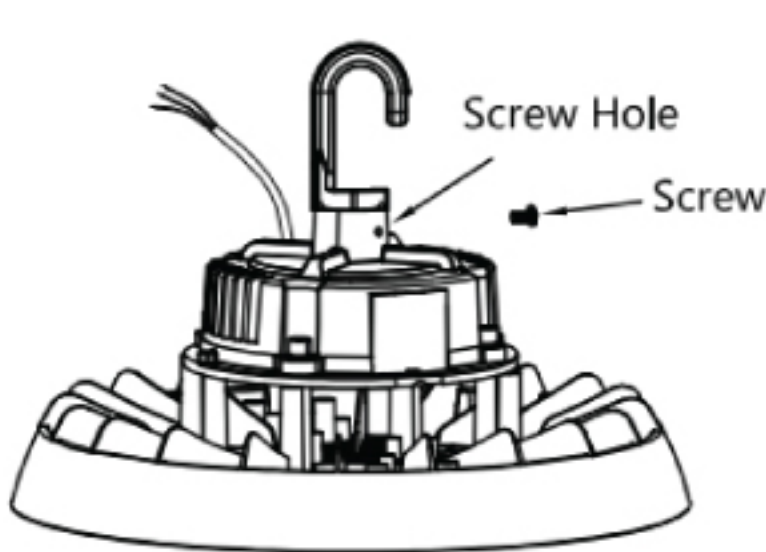


3.Hang the light

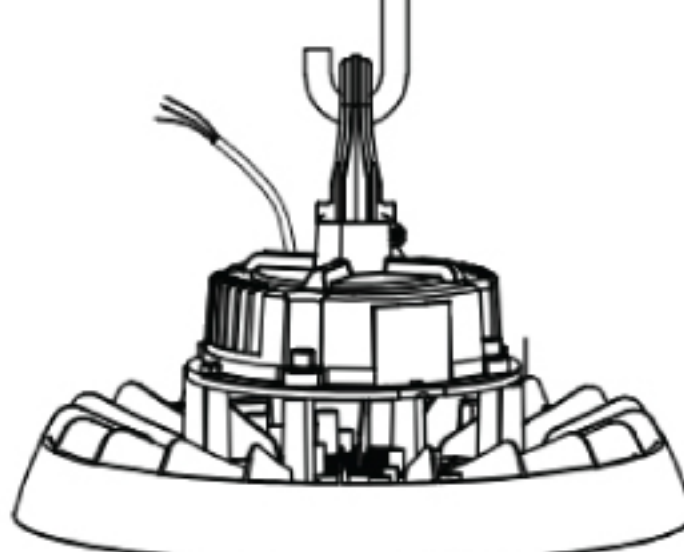

4.Tighten the screw

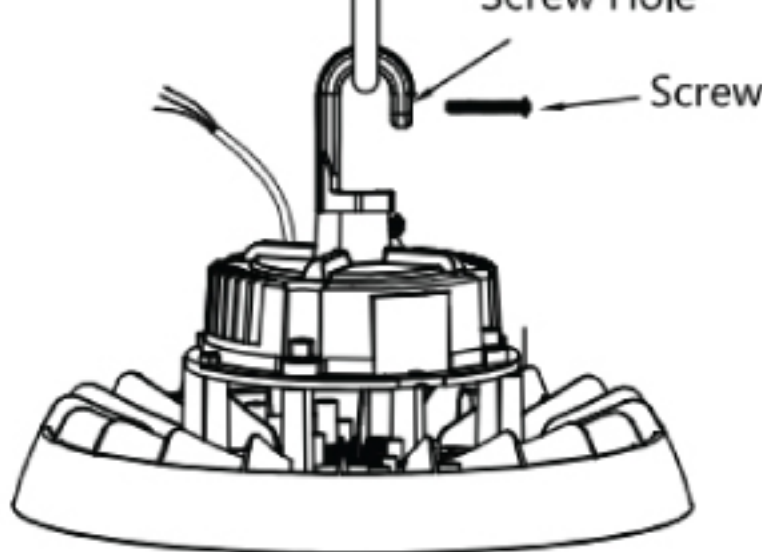

OPTIONAL ACCESSORY (SOLD SEPARATELY)

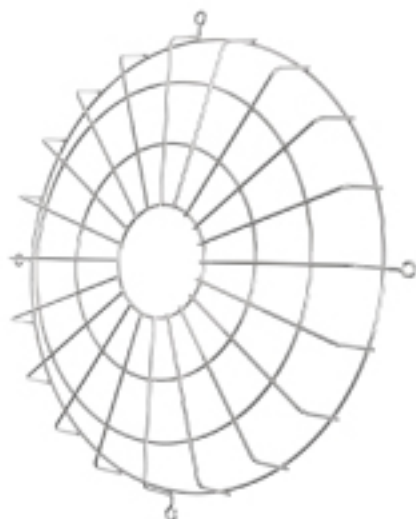

WIRE GUARD



PNP-SENSOR



PNP-REMOTE



ALUMINUM REFLECTOR

Reference	QTY.	Remarks	Project:
			Location:
			Architect:
			Engineer:
			Contractor:
			Submitted by:
			Date:

ORTECH reserves the right to modify at any time, without notice, any or all of our product's features, designs, components and specifications to meet market changes.